



D117 / 119
Single Console

Drawer Features & Display Benefits

- ▶ 1U dual slide 17" or 19" LCD console drawer
- ▶ Green LED-backlit panel technology
- ▶ 104-key keyboard with touchpad
- ▶ Enhanced aesthetics with new molded front panel and two point lock
- ▶ Combo interface either PS/2 or USB for single console drawer

Options

- S-Video + Composite (BNC)
- HDMI or DVI-D (either one)
- DC power : 12V / 24V / 48V / 125V / 250V



Specifications

• LCD Panel

Manufacturer :	AUO	AUO
Size (diagonal) :	17" TFT	19" TFT
Max resolution :	1280 x 1024	1280 x 1024
Brightness (cd/m2) :	250	250
Backlight :	LED	LED
Colors :	16.7 M	16.7 M
Contrast ratio (typ) :	1000 : 1	1000 : 1
Viewing angle (H/V) :	170° x 160°	170° x 160°
Active area (mm) :	338 x 270	376 x 301
MTBF (hrs) :	30,000	30,000
Video input :	VGA	VGA

- **Speaker :** Built-in Dual Stereo Speakers (HDMI only) 2W x 2

- **Casing Color :** Black (RAL 9005)

- **Power Input :** Auto-sensing 100 to 240VAC, 50 / 60Hz

• Power Consumption (single console)

Sreen on :	Max. 25W
Power saving mode :	Max. 4W
Power button on :	Max. 1W

• Environmental

Operating temperature :	0 to 55°C degree
Storage temperature :	-20 to 60°C degree
Operating humidity :	20~90%, non-condensing
Storage humidity :	5 ~90%, non-condensing
Operating altitude :	16,000 ft
Non-operating altitude :	40,000 ft
Shock :	10G acceleration (11ms duration)
Vibration :	5~500Hz 1G RMS random vibration

• Regulatory

Safety :	cUL, FCC & CE certified
Environmental :	RoHS2 & REACH compliant

• Weight (single console)

	Net	Gross
D117 :	12.6 kgs / 27.7 lbs	18.4 kgs / 40.5 lbs
D119 :	13.2 kgs / 29 lbs	19 kgs / 41.8 lbs

• Dimensions (single console)

Product :	441.6 x 650 x 44 mm / 17.4 x 25.6 x 1.73 inch
Packing :	595 x 860 x 140 mm / 23.4 x 33.9 x 5.5 inch

Console Cable

CB-6

- 6 feet VGA console cable (bundle)
- VGA + USB, server end
- DB15 (VGA, USB KB & MS), console port



or

CE-6 (for PS/2 KB / MS)







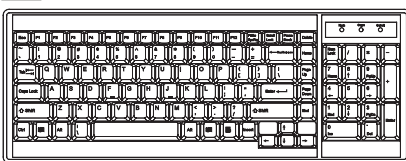









- 6 feet Combo KVM cable (alternative)
- VGA + USB or PS/2, server end
- DB15 (VGA, USB KB & MS), console port

Keyboard

Ge G keyboard integrated with touchpad



Supporting layouts

America					
	United States				
EMEA					
	United Kingdom	Germany	France	Spain	Norway
					
	Italy	Russia	Switzerland	Netherlands	Portugal
Asia					
	China	Japan	Korea	Arabia	Turkey

1U Dual Slide 17" / 19" LCD KVM Drawer



• Dimensions (with KVM)

Product : 441.6 x 650 x 44 mm / 17.4 x 25.6 x 1.73 inch
 Packing : 595 x 860 x 140 mm / 23.4 x 33.9 x 5.5 inch

• Weight (Net / Gross)

D117 : 13.6 kgs 19.8 kgs
 (29.9 lbs) (43.6 lbs)
 D119 : 14.2 kgs 20.4 kgs
 (31.2 lbs) (44.9 lbs)

• Power Consumption with KVM integration :

Screen on : Max. 55W
 Power saving mode : Max. 34W

• Casing Color : Black (RAL 9005)

* For details, please refer to our KVM rear kit user manuals.

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MUKVM-KIT.pdf

X stands for 17" or 19" LCD size.

Matrix Cat6 KVM	Local	Remote	TP	8-port	16-port	32-port
	1	1	1	-	D11X - MUIP1613	D11X - MUIP3213
	1	1	2	-	D11X - MUIP1624	D11X - MUIP3224
	1	1	0	-	D11X - MU1602	D11X - MU3202
	1	2	0	-	D11X - MU1603	D11X - MU3203
	1	3	0	-	D11X - MU1604	D11X - MU3204

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-UKVM-KIT.pdf

Combo Cat6 KVM	Local	Remote	TP	8-port	16-port	32-port
	1	0	1	D11X - UIP802	D11X - UIP1602	D11X - UIP3202
	1	1	0	D11X - U802	D11X - U1602	D11X - U3202
	1	0	0	D11X - U801	D11X - U1601	D11X - U3201

Cat6 KVM Dongle : DG-100S (VGA-USB) / DG-100 (VGA-PS/2) / DG-100SD (DVI-USB)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MKVM-KIT.pdf

Matrix DB-15 KVM	Local	Remote	TP	8-port	16-port	32-port
	1	1	1	D11X - MIP813	D11X - MIP1613	-
	1	1	2	D11X - MIP824	D11X - MIP1624	-
	1	1	0	D11X - M802	D11X - M1602	-
	1	2	0	D11X - M803	D11X - M1603	-
	1	3	0	D11X - M804	D11X - M1604	-

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-SKVM-KIT.pdf

Combo DB-15 KVM	Local	Remote	TP	8-port	16-port	32-port
	1	0	1	D11X - IP802	D11X - IP1602	-
	1	1	0	D11X - 802	D11X - 1602	-
	1	0	0	D11X - S801	D11X - S1601	-

USB KVM Cable : CB-6 / 10 / 15 (6, 10 or 15 ft)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-DVIKVM-KIT.pdf

DVI-D KVM	Local	Remote	TP	12-port	-	-
	1	0	0	D11X - 1201D	-	-

DVI-D KVM Cable : CI-6 / 15 (6 or 15 ft)