




Benefits

- ▶ 1U 17" 4K LCD console drawer
- ▶ Dual slide - LCD and keyboard slide independently
- ▶ 3840 x 2160 native resolution / 16.7M colors (8-bit)
- ▶ 1920 x 1080 & 1920 x 1200 resolution support
- ▶ Display port 1.2 video input / USB KB / MS
- ▶ Built-in dual stereo speakers
- ▶ One Man installation design
- ▶ Enhanced aesthetics with molded front handle and two point lock
- ▶ 2-year standard warranty (upgradable up to 5 years)

Options

- HDMI 1.4 video input
- 3G / HD / SD-SDI Broadcast-grade input
- DC power : 12V / 24V / 48V / 125V
- MAC or SUN Micro keyboard options available

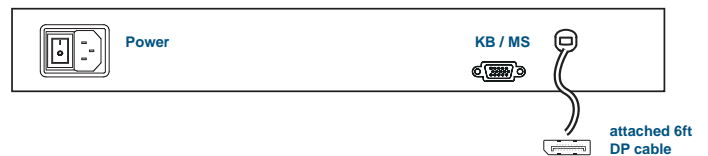

Product Specifications

Console Port	
Video input attached 6ft DP cable	Display port 1.2
KB / MS bundled 6ft cable : EKC-2	Drawer end : DB-15 (USB KB / MS) Server end : USB type A

LCD Panel	
Panel size (diagonal)	17.3"
Native resolution	3840 x 2160
Brightness (cd/m ²)	400
Contrast ratio (typ.)	1000 : 1
Colors	16.7 M, 8-bit
Viewing angle (L/R/U/D)	89/89/89/89
Response time (ms)	30
Dot pitch (mm)	0.0995
Display area (mm)	382.12H x 214.94V
Surface treatment	Anti-glare
Surface hardness	3H
Backlight type	LED
MTBF (hrs)	20,000

Physical		
Product (W x D x H)	Single console	442 x 650 x 44 mm 17.4 x 25.6 x 1.73 inch
	Console w/ KVM	442 x 650 x 44 mm 17.4 x 25.6 x 1.73 inch
Packing (W x D x H)	Single console /	595 x 860 x 140 mm
	Console w/ KVM	23.4 x 33.9 x 5.5 inch
Net weight	Single console	12 kg / 26.4 lb
	Console w/ KVM	13 kg / 28.6 lb
Gross weight	Single console	18 kg / 39.6 lb
	Console w/ KVM	19 kg / 41.8 lb

Mounting Distance	
Single console drawer / Console w/ KVM drawer	660 ~ 870 mm 26 ~ 34.3 inch

Video Option		
Digital	HDMI	HDMI 2.0 / HDCP 2.2

Audio Option		
Input	Connector	3.5mm stereo jack
	Impedance / Power level	30kΩ / 750mV
Output	Connector	3.5mm stereo jack
	Resistance / Power level	30kΩ / 2.8V
Speaker	Dual stereo	2W x 2

Power		
Input	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption (console / KVM)	Screen on	Max. 29W / Max. 38W
	Power saving mode	Max. 9W / Max. 18W
	Power button on	Max. 2W / Nil

Environment	
Operating temp.	0 to 55°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	20~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration


Compliance	
EMC	FCC & CE certified
Safety	CE / LVD certified
Environment	RoHS2 & REACH compliant

DK117 models w/ KVM

** **IP** console upgrade option for resolution support 1920 x 1080

DP KVM	IP	Remote	12-port
	1	0	DK117 - IP1202P
	0	1	DK117 - 1202P
	0	0	DK117 - 1201P


DP USB KVM Cable	
Resolution	16:10 - max. 1920 x 1200
Support :	16:9 - max. 3840 x 2160 4:3 - max. 1600 x 1200
** Resolution related to LCD specification	



CP - 6 (6 ft)

DVI-D KVM	IP	Remote	12-port
	0	0	DK117 - 1201D


DVI-D USB KVM Cable	
Resolution	16:10 - max. 1920 x 1200
Support :	16:9 - max. 1920 x 1080 4:3 - max. 1600 x 1200
** Resolution related to LCD specification	









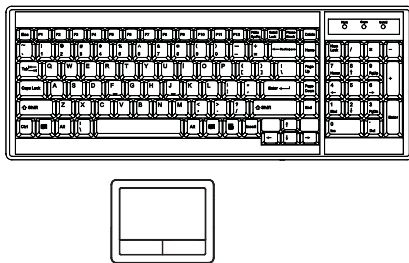









CI - 6 (6 ft)
CI - 15 (15 ft)

Standard Keyboard

Ge G keyboard integrated with touchpad



Supporting layouts

America	 United States
EMEA	 United Kingdom
	 Germany
	 France
	 Spain
	 Norway
Asia	 Italy
	 Russia
	 Switzerland
	 Netherlands
	 Portugal
Asia	 China
	 Japan
	 Korea
	 Arabia
	 Turkey

Keyboard Options

* US layout only

Me Mac keyboard with touchpad



Se S keyboard with touchpad

