



DS117 / 119 Single Console



Drawer Features & Display Benefits

- ▶ 1U dual slide 17" or 19" LCD console drawer
- ▶ Direct Support for SUN Micro 1152 x 900 native resolution
- ▶ Secure remote user access across the world wide web
- ▶ Green LED-backlit panel technology
- ▶ 104-key keyboard with SUN hotkeys
- ▶ Enhanced aesthetics with new molded front panel and two point lock

Options

- DC power : 12V / 24V / 48V / 125V / 250V



Specifications

• LCD Panel

Manufacturer :	AUO	AUO
Size (diagonal) :	17" TFT	19" TFT
Direct resolution :	1152 x 900	1152 x 900
Native resolution :	1280 x 1024	1280 x 1024
Brightness (cd/m2) :	250	250
Backlight :	LED	LED
Colors :	16.7 M	16.7 M
Contrast ratio (typ) :	1000 : 1	1000 : 1
Viewing angle (H/V) :	170° x 160°	170° x 160°
Active area (mm) :	338 x 270	376 x 301
MTBF (hrs) :	30,000	30,000
Video input :	VGA	VGA

• **Power Input :** Auto-sensing 100 to 240VAC, 50 / 60Hz

• Power Consumption (single console)

Screen on :	Max. 25W
Power saving mode :	Max. 4W
Power button on :	Max. 1W

• Environmental

Operating temperature :	0 to 55°C degree
Storage temperature :	-20 to 60°C degree
Operating humidity :	20~90%, non-condensing
Storage humidity :	5 ~90%, non-condensing
Operating altitude :	16,000 ft
Non-operating altitude :	40,000 ft
Shock :	10G acceleration (11ms duration)
Vibration :	5~500Hz 1G RMS random vibration

• **Casing Color :** Black (RAL 9005)

• Regulatory

Safety :	cUL, FCC & CE certified
Environmental :	RoHS2 & REACH compliant

• Weight (single console)

	Net	Gross
DS117 :	12.6 kgs / 27.7 lbs	18.4 kgs / 40.5 lbs
DS119 :	13.2 kgs / 29 lbs	19 kgs / 41.8 lbs

• Dimensions (single console)

Product :	441.6 x 650 x 44 mm / 17.4 x 25.6 x 1.73 inch
Packing :	595 x 860 x 140 mm / 23.4 x 33.9 x 5.5 inch

Console Cable

CX-6

- 6 feet DVI-D console cable (bundle)
- DVI-D + USB, server end
 - DVI-D + DB15 (USB KB & MS), console port



or

CB-6

- 6 feet VGA console cable (alternative)
- VGA + USB, server end
 - DB15 (VGA, USB KB & MS), console port

Keyboard

Se S keyboard integrated with touchpad

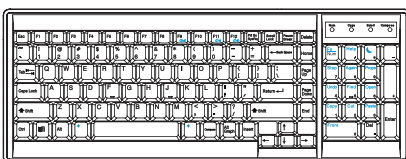

Supporting layouts

America 
United States

1U Dual Slide 17" / 19" SUN LCD KVM Drawer



• Dimensions (with KVM)

Product : 441.6 x 650 x 44 mm / 17.4 x 25.6 x 1.73 inch

Packing : 595 x 860 x 140 mm / 23.4 x 33.9 x 5.5 inch

• Weight (Net / Gross)

DS117 : 13.6 kgs 19.8 kgs
(29.9 lbs) (43.6 lbs)

DS119 : 14.2 kgs 20.4 kgs
(31.2 lbs) (44.9 lbs)

• Power Consumption with KVM integration :

Screen on : Max. 55W

Power saving mode : Max. 34W

• Casing Color : Black (RAL 9005)

* For details, please refer to our KVM rear kit user manuals.

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MUKVM-KIT.pdf

X stands for 17" or 19" LCD size.

Matrix Cat6 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	-	DS11X - MUIP1613	DS11X - MUIP3213
	1	1	2	-	DS11X - MUIP1624	DS11X - MUIP3224
	1	1	0	-	DS11X - MU1602	DS11X - MU3202
	1	2	0	-	DS11X - MU1603	DS11X - MU3203
	1	3	0	-	DS11X - MU1604	DS11X - MU3204

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-UKVM-KIT.pdf

Combo Cat6 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	DS11X - UIP802	DS11X - UIP1602	DS11X - UIP3202
	1	1	0	DS11X - U802	DS11X - U1602	DS11X - U3202
	1	0	0	DS11X - U801	DS11X - U1601	DS11X - U3201

Cat6 KVM Dongle : DG-100S (VGA-USB) / DG-100 (VGA-PS/2) / DG-100SD (DVI-USB)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MKVM-KIT.pdf

Matrix DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	DS11X - MIP813	DS11X - MIP1613	-
	1	1	2	DS11X - MIP824	DS11X - MIP1624	-
	1	1	0	DS11X - M802	DS11X - M1602	-
	1	2	0	DS11X - M803	DS11X - M1603	-
	1	3	0	DS11X - M804	DS11X - M1604	-

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-SKVM-KIT.pdf

Combo DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	DS11X - IP802	DS11X - IP1602	-
	1	1	0	DS11X - 802	DS11X - 1602	-
	1	0	0	DS11X - S801	DS11X - S1601	-

Combo DB-15 KVM Cable : CE-6 / 10 / 15 (6, 10 or 15 ft)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-DVIKVM-KIT.pdf

DVI-D KVM	Local	Remote	IP	12-port	-	-
	1	0	0	DS11X - 1201D	-	-

DVI-D KVM Cable : CI-6 / 15 (6 or 15 ft)