



Ultra short depth
400mm / 15.7"



Benefits

- ▶ 1U 17" 4K LCD console drawer
- ▶ 3840 x 2160 native resolution / 16.7M colors (8-bit)
- ▶ 1920 x 1080 & 1920 x 1200 resolution support
- ▶ Display port 1.2 video input / USB KB / MS
- ▶ Ideal for open rack / short depth rack
- ▶ 104-key keyboard with either touchpad or trackball
- ▶ Built-in dual stereo speakers
- ▶ One Man installation design
- ▶ Enhanced aesthetics with new molded front panel and 2-point lock
- ▶ 2-year standard warranty (upgradable up to 5 years)

Options

- HDMI 1.4 video input
- 3G / HD / SD-SDI Broadcast-grade input
- DC power : 12V / 24V / 48V / 125V
- MAC or SUN Micro keyboard options available
- 2-post rack mounting brackets (**ORB-2.1**)

Product Specifications

Console Port

| | |
|-----------------------------|--|
| Video input | Display port 1.2 |
| KB / MS | USB type B |
| DP console 6ft cable : CP-6 | Drawer end : DP + USB type B (KB / MS) Server end : DP + USB type A |

Video Option

| | | |
|---------|------|---------------------|
| Digital | HDMI | HDMI 1.4 / HDCP 1.4 |
|---------|------|---------------------|

LCD Panel

| | |
|----------------------------------|-------------------|
| Panel size (diagonal) | 17.3" |
| Native resolution | 3840 x 2160 |
| Brightness (cd/m ²) | 400 |
| Contrast ratio (typ.) | 1000 : 1 |
| Colors | 16.7 M, 8-bit |
| Viewing angle (L/R/U/D) | 89/89/89/89 |
| Response time (ms) | 30 |
| Dot pitch (mm) | 0.0995 |
| Display area (mm) | 382.12H x 214.94V |
| Surface treatment | Anti-glare |
| Surface hardness | 3H |
| Backlight type | LED |
| MTBF (hrs) | 20,000 |

Power

| | | |
|-----------------------------|---------------------------------------|---------------------|
| Input | Auto-sensing 100 to 240VAC, 50 / 60Hz | |
| Consumption (console / KVM) | Screen on | Max. 29W / Max. 38W |
| | Power saving mode | Max. 9W / Max. 18W |
| | Power button on | Max. 2W / Nil |

Physical

| | | |
|-----------------------|---------------------------------|--|
| Product (W x D x H) | Single console | 442 x 400 x 44 mm 17.4 x 15.7 x 1.73 inch |
| | Console w/ KVM | 442 x 460 x 44 mm 17.4 x 18.1 x 1.73 inch |
| Packing (W x D x H) | Single console / Console w/ KVM | 590 x 622 x 140 mm 23.2 x 24.5 x 5.5 inch |
| | Net weight | Single console : 8.7 kg / 19.1 lb Console w/ KVM : 9.5 kg / 20.9 lb |
| Gross weight | Single console | 13.7 kg / 30.2 lb |
| | Console w/ KVM | 15.4 kg / 33.9 lb |

Environment

| | |
|------------------------|------------------------------------|
| Operating temp. | 0 to 55°C degree |
| Storage temp. | -20 to 60°C degree |
| Operating humidity | 20~90%, non-condensing |
| Storage humidity | 5 ~90%, non-condensing |
| Operating altitude | 16,000 ft |
| Non-operating altitude | 40,000 ft |
| Shock | 10G acceleration (11ms duration) |
| Vibration | 10~300Hz 0.5G RMS random vibration |

Mounting Distance

| | |
|-----------------------|----------------------------------|
| Single console drawer | 410 ~ 640 mm 16.1 ~ 25.2 inch |
| Console w/ KVM drawer | 410 ~ 680 mm 16.1 ~ 26.8 inch |

Compliance

| | |
|-------------|-------------------------|
| EMC | FCC & CE certified |
| Safety | CE / LVD certified |
| Environment | RoHS2 & REACH compliant |


K1417 models w/ KVM

** **IP** console upgrade option for resolution 1920 x 1080

| DP KVM | IP | Remote | 12-port |
|--------|----|--------|-----------------|
| | 1 | 0 | K1417 - IP1202P |
| | 0 | 1 | K1417 - 1202P |
| | 0 | 0 | K1417 - 1201P |

DP USB KVM Cable

Resolution 16:10 - max. 1920 x 1200
 Support : 16:9 - max. 3840 x 2160
 4:3 - max. 1600 x 1200





** Resolution related to LCD specification


CP - 6 (6 ft)

Standard Keyboard

Ge G keyboard integrated with touchpad

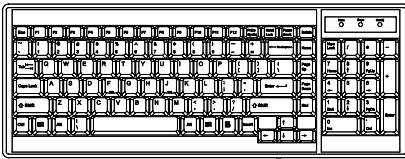

Gb G keyboard integrated with trackball

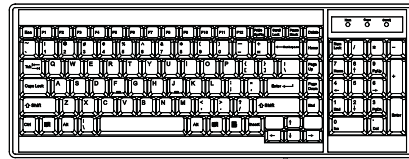

Supporting layouts

| | | | | | |
|----------------|----------------|---------------|-------------|-------------|----------|
| America | | United States | | | |
| EMEA | | | | | |
| | United Kingdom | Germany | France | Spain | Norway |
| | | | | | |
| | Italy | Russia | Switzerland | Netherlands | Portugal |
| Asia | | | | | |
| | China | Japan | Korea | Arabia | Turkey |

Keyboard Options

* US layout only

Me Mac keyboard with touchpad



Se S keyboard with touchpad

Mb Mac keyboard with trackball

Sb S keyboard with trackball

