



### NS117 / 119 Single Console



#### Drawer Features & Display Benefits

- ▶ 1U 17" or 19" LCD console drawer
- ▶ Direct Support for SUN Micro 1152 x 900 native resolution
- ▶ Secure remote user access across the world wide web
- ▶ Green LED-backlit panel technology
- ▶ 104-key keyboard with SUN hotkeys
- ▶ Short depth design of 500mm ( 19.7" ) only
- ▶ Enhanced aesthetics with molded front handle and two point lock

#### Options

- DC power : 12V / 24V / 48V / 125V / 250V



#### Specifications

##### • LCD Panel

Manufacturer :	AUO	AUO
Size (diagonal) :	17" TFT	19" TFT
Direct resolution :	1152 x 900	1152 x 900
Native resolution :	1280 x 1024	1280 x 1024
Brightness (cd/m2) :	250	250
Backlight :	LED	LED
Colors :	16.7 M	16.7 M
Contrast ratio (typ) :	1000 : 1	1000 : 1
Viewing angle (H/V) :	170° x 160°	170° x 160°
Active area (mm) :	338 x 270	376 x 301
MTBF (hrs) :	30,000	30,000
Video input :	VGA	VGA

• **Power Input :** Auto-sensing 100 to 240VAC, 50 / 60Hz

##### • Power Consumption ( single console )

Sreen on :	Max. 25W
Power saving mode :	Max. 4W
Power button on :	Max. 1W

##### • Environmental

Operating temperature :	0 to 55°C degree
Storage temperature :	-20 to 60°C degree
Operating humidity :	20~90%, non-condensing
Storage humidity :	5 ~90%, non-condensing
Operating altitude :	16,000 ft
Non-operating altitude :	40,000 ft
Shock :	10G acceleration ( 11ms duration )
Vibration :	5~500Hz 1G RMS random vibration

• **Casing Color :** Black ( RAL 9005 )

##### • Regulatory

Safety :	cUL, FCC & CE certified
Environmental :	RoHS2 & REACH compliant

##### • Weight ( single console )

	Net	Gross
NS117 :	12.3 kgs / 27.1 lbs	16.5 kgs / 36 lbs
NS119 :	12.5 kgs / 27.5 lbs	17 kgs / 37.4 lbs

##### • Dimensions ( single console )

Product :	441.6 x 500 x 44 mm / 17.4 x 19.7 x 1.73 inch
Packing :	590 x 808 x 140 mm / 23.2 x 31.8 x 5.5 inch

#### Console Cable

##### CX-6

- 6 feet DVI-D console cable ( bundle )
- DVI-D + USB, server end
  - DVI-D + DB15 ( USB KB & MS ), console port



or

##### CB-6


- 6 feet VGA console cable ( alternative )
- VGA + USB, server end
  - DB15 ( VGA, USB KB & MS ), console port

#### Keyboard

**Se** S keyboard integrated with touchpad

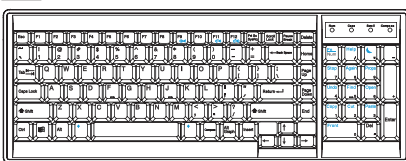

**Sb** S keyboard integrated with trackball

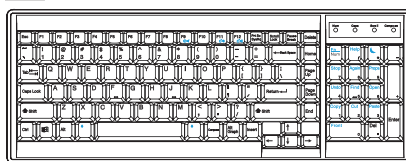

#### Supporting layouts

America   
United States



• **Dimensions ( with KVM )**

Product : 441.6 x 620 x 44 mm / 17.4 x 24.4 x 1.73 inch  
 Packing : 590 x 808 x 140 mm / 23.2 x 31.8 x 5.5 inch

• **Weight ( Net / Gross )**

N117 : 13.3 kgs 16.5 kgs  
 ( 29.2 lbs ) ( 36.3 lbs )  
 N119 : 13.5 kgs 18.4 kgs  
 ( 29.7 lbs ) ( 40.5 lbs )

• **Power Consumption with KVM integration :**

Screen on : Max. 55W  
 Power saving mode : Max. 34W

• **Casing Color :** Black ( RAL 9005 )

\* For details, please refer to our KVM rear kit user manuals.

[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MUKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MUKVM-KIT.pdf)

**X** stands for 17" or 19" LCD size.

Matrix Cat6 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	-	NS11X - MUIP1613	NS11X - MUIP3213
	1	1	2	-	NS11X - MUIP1624	NS11X - MUIP3224
	1	1	0	-	NS11X - MU1602	NS11X - MU3202
	1	2	0	-	NS11X - MU1603	NS11X - MU3203
	1	3	0	-	NS11X - MU1604	NS11X - MU3204

[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-UKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-UKVM-KIT.pdf)

Combo Cat6 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	NS11X - UIP802	NS11X - UIP1602	NS11X - UIP3202
	1	1	0	NS11X - U802	NS11X - U1602	NS11X - U3202
	1	0	0	NS11X - U801	NS11X - U1601	NS11X - U3201

Cat6 KVM Dongle : DG-100S ( VGA-USB ) / DG-100 ( VGA-PS/2 ) / DG-100SD ( DVI-USB )

[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MKVM-KIT.pdf)

Matrix DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	NS11X - MIP813	NS11X - MIP1613	-
	1	1	2	NS11X - MIP824	NS11X - MIP1624	-
	1	1	0	NS11X - M802	NS11X - M1602	-
	1	2	0	NS11X - M803	NS11X - M1603	-
	1	3	0	NS11X - M804	NS11X - M1604	-

[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-SKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-SKVM-KIT.pdf)

Combo DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	NS11X - IP802	NS11X - IP1602	-
	1	1	0	NS11X - 802	NS11X - 1602	-
	1	0	0	NS11X - S801	NS11X - S1601	-

Combo DB-15 KVM Cable : CE-6 / 10 / 15 ( 6, 10 or 15 ft )

[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-DVIKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-DVIKVM-KIT.pdf)

DVI-D KVM	Local	Remote	IP	12-port	-	-
	1	0	0	NS11X - 1201D	-	-

DVI-D KVM Cable : CI-6 / 15 ( 6 or 15 ft )