



RKP7 / 9 Single Console

Drawer Features & Display Benefits

- ▶ 1U 17" or 19" LCD console drawer
- ▶ Green LED-backlit panel technology
- ▶ 104-key keyboard with a true optical mouse
- ▶ Enhanced aesthetics with molded front handle and two point lock
- ▶ Combo interface either PS/2 or USB for single console drawer

Options

- S-Video + Composite (BNC)
- HDMI or DVI-D (either one)
- DC power : 12V / 24V / 48V / 125V / 250V



Specifications

• LCD Panel

Manufacturer :	AUO	AUO
Size (diagonal) :	17" TFT	19" TFT
Max resolution :	1280 x 1024	1280 x 1024
Brightness (cd/m2) :	250	250
Backlight :	LED	LED
Colors :	16.7 M	16.7 M
Contrast ratio (typ) :	1000 : 1	1000 : 1
Viewing angle (H/V) :	170° x 160°	170° x 160°
Active area (mm) :	338 x 270	376 x 301
MTBF (hrs) :	30,000	30,000
Video input :	VGA	VGA

- **Speaker :** Built-in Dual Stereo Speakers (HDMI only)
2W x 2

- **Casing Color :** Black (RAL 9005)

- **Power Input :** Auto-sensing 100 to 240VAC, 50 / 60Hz

• Power Consumption (single console)

Sreen on :	Max. 25W
Power saving mode :	Max. 4W
Power button on :	Max. 1W

• Environmental

Operating temperature :	0 to 55°C degree
Storage temperature :	-20 to 60°C degree
Operating humidity :	20~90%, non-condensing
Storage humidity :	5 ~90%, non-condensing
Operating altitude :	16,000 ft
Non-operating altitude :	40,000 ft
Shock :	10G acceleration (11ms duration)
Vibration :	5~500Hz 1G RMS random vibration

• Regulatory

Safety :	FCC & CE certified
Environmental :	RoHS2 & REACH compliant

• Weight (single console)

	Net	Gross
RKP7 :	14.3 kgs / 31.5 lbs	19.1 kgs / 42 lbs
RKP9 :	15.3 kgs / 33.7 lbs	20.1 kgs / 44.2 lbs

• Product Dimensions (single console)

RKP7 :	442 x 650 x 44 mm / 17.4 x 18.1 x 1.73 inch
RKP9 :	442 x 700 x 44 mm / 17.4 x 27.6 x 1.73 inch

• Packing Dimensions (single console)

RKP7 :	595 x 860 x 140 mm / 23.4 x 33.9 x 5.5 inch
RKP9 :	595 x 910 x 140 mm / 23.4 x 35.8 x 5.5 inch

Console Cable

CB-6

- 6 feet VGA console cable (bundle)
- VGA + USB, server end
- DB15 (VGA, USB KB & MS), console port


or

CE-6 (for PS/2 KB / MS)

- 6 feet Combo KVM cable (alternative)
- VGA + USB or PS/2, server end
- DB15 (VGA, USB KB & MS), console port

Keyboard

G G keyboard

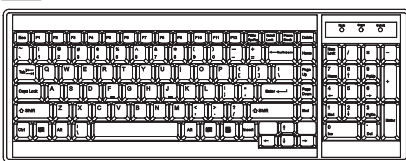

Supporting layouts

America	United States										
EMEA	<table border="1"> <tbody> <tr> <td> United Kingdom</td> <td> Germany</td> <td> France</td> <td> Spain</td> <td> Norway</td> </tr> <tr> <td> Italy</td> <td> Russia</td> <td> Switzerland</td> <td> Netherlands</td> <td> Portugal</td> </tr> </tbody> </table>	United Kingdom	Germany	France	Spain	Norway	Italy	Russia	Switzerland	Netherlands	Portugal
United Kingdom	Germany	France	Spain	Norway							
Italy	Russia	Switzerland	Netherlands	Portugal							
Asia	<table border="1"> <tbody> <tr> <td> China</td> <td> Japan</td> <td> Korea</td> <td> Arabia</td> <td> Turkey</td> </tr> </tbody> </table>	China	Japan	Korea	Arabia	Turkey					
China	Japan	Korea	Arabia	Turkey							



WOM-01

Wired mini USB optical mouse



• **Product Dimensions (with KVM)**

RKP7 : 442 x 650 x 44 mm / 17.4 x 25.6 x 1.73 inch
 RKP9 : 442 x 700 x 44 mm / 17.4 x 27.6 x 1.73 inch

• **Packing Dimensions (with KVM)**

RKP7 : 595 x 860 x 140 mm / 23.4 x 33.9 x 5.5 inch
 RKP9 : 595 x 910 x 140 mm / 23.4 x 35.8 x 5.5 inch

• **Weight (Net / Gross)**

RKP7 : 14.7 kgs 21.1 kgs
 (32.3 lbs) (46.4 lbs)
 RKP9 : 16.3 kgs 21.5 kgs
 (35.9 lbs) (47.3 lbs)

• **Casing Color :** Black (RAL 9005)

• **Power Consumption with KVM integration :** * For details, please refer to our KVM rear kit user manuals.

Screen on : Max. 55W
 Power saving mode : Max. 34W

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MUKVM-KIT.pdf

X stands for 17" or 19" LCD size.

Matrix Cat6 KVM	Local	Remote	TP	8-port	16-port	32-port
	1	1	1	-	RKPX - MUIP1613	RKPX - MUIP3213
	1	1	2	-	RKPX - MUIP1624	RKPX - MUIP3224
	1	1	0	-	RKPX - MU1602	RKPX - MU3202
	1	2	0	-	RKPX - MU1603	RKPX - MU3203
	1	3	0	-	RKPX - MU1604	RKPX - MU3204

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-UKVM-KIT.pdf

Combo Cat6 KVM	Local	Remote	TP	8-port	16-port	32-port
	1	0	1	RKPX - UIP802	RKPX - UIP1602	RKPX - UIP3202
	1	1	0	RKPX - U802	RKPX - U1602	RKPX - U3202
	1	0	0	RKPX - U801	RKPX - U1601	RKPX - U3201

Cat6 KVM Dongle : DG-100S (VGA-USB) / DG-100 (VGA-PS/2) / DG-100SD (DVI-USB)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MKVM-KIT.pdf

Matrix DB-15 KVM	Local	Remote	TP	8-port	16-port	32-port
	1	1	1	RKPX - MIP813	RKPX - MIP1613	-
	1	1	2	RKPX - MIP824	RKPX - MIP1624	-
	1	1	0	RKPX - M802	RKPX - M1602	-
	1	2	0	RKPX - M803	RKPX - M1603	-
	1	3	0	RKPX - M804	RKPX - M1604	-

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-SKVM-KIT.pdf

Combo DB-15 KVM	Local	Remote	TP	8-port	16-port	32-port
	1	0	1	RKPX - IP802	RKPX - IP1602	-
	1	1	0	RKPX - 802	RKPX - 1602	-
	1	0	0	RKPX - S801	RKPX - S1601	-

USB KVM Cable : CB-6 / 10 / 15 (6, 10 or 15 ft)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-DVIKVM-KIT.pdf

DVI-D KVM	Local	Remote	TP	12-port	-	-
	1	0	0	RKPX - 1201D	-	-

DVI-D KVM Cable : CI-6 / 15 (6 or 15 ft)