

AP-X17

6mm aluminum front bezel




Display Benefits

- ▶ 17" widescreen LCD with 1920 x 1200 native **WUXGA** Ultra high resolution
- ▶ Standard with HDMI, DVI-D, VGA, S-Video, BNC, Audio & remote controller
- ▶ PIP & Picture by Picture viewing efficiency
- ▶ Green LED-backlit panel technology
- ▶ Rugged construction against external impact

Options

- 3G / HD / SD-SDI Broadcast-grade input
- **MCS** Multi-display control solution
- Resistive / Capacitive (1-point touch)
- Protective glass
- MIL-type or lockable connector
- DC power : 12V / 24V / 48V / 125V / 250V

Basic I/O



Specifications

• LCD Panel

- Size (diagonal) : 17.1" Widescreen TFT
- Max resolution : 1920 x 1200
- Brightness (cd/m2) : 210
- Backlight : LED
- Colors : 16.7 M, 8-bit
- Contrast ratio (typ) : 600 : 1
- Viewing angle (H/V) : 130° x 110°
- Active area (mm) : 367 x 230
- MTBF (hrs) : 20,000
- Video input : HDMI / DVI-D / VGA / S-Video / BNC

• Speaker :

Built-in Dual Stereo Speakers
2W x 2

• Power Input :

Auto-sensing 100 to 240VAC, 50 / 60Hz

• Power Consumption

- Screen on : Max. 34W
- Power saving mode : Max. 4W
- Power button on : Max. 1W

• Environmental

- Operating temperature : 0 to 55°C degree
- Storage temperature : -20 to 60°C degree
- Operating humidity : 20~90%, non-condensing
- Storage humidity : 5 ~90%, non-condensing
- Operating altitude : 16,000 ft
- Non-operating altitude : 40,000 ft
- Shock : 10G acceleration (11ms duration)
- Vibration : 5~500Hz 1G RMS random vibration

• Casing Color :

Black (RAL 9005)

• Mounting :

Panel mount / VESA mount

• Regulatory

- Safety : FCC & CE certified
- Environmental : RoHS2 & REACH compliant

• Weight


- Net : 4.9 kgs / 10.8 lbs
- Gross : 7.7 kgs / 16.9 lbs

• Dimensions


- Product : 468.5 x 57.1 x 331 mm / 18.4 x 2.2 x 13 inch
- Packing : 615 x 113 x 523 mm / 24.2 x 4.4 x 20.6 inch

Diagrams (mm)


Front View

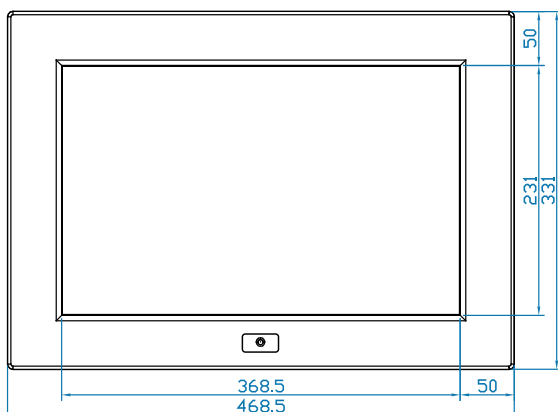

Side View

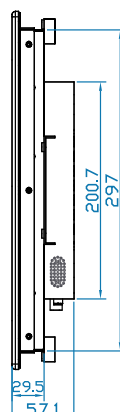

Rear View

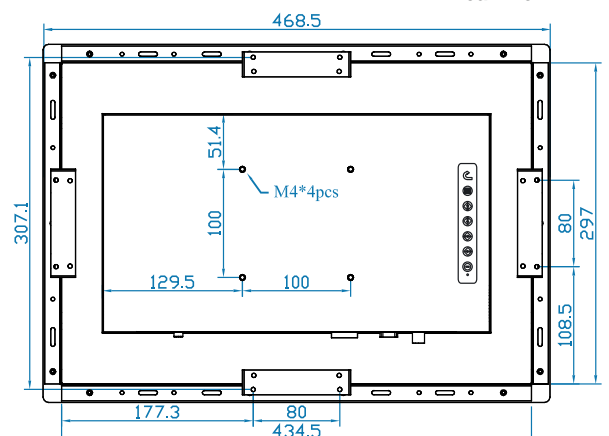

NAP-X17 NEMA 4 / IP65 front protection




Display Benefits

- ▶ 17" widescreen LCD with 1920 x 1200 native **WUXGA** Ultra high resolution
- ▶ Standard with HDMI, DVI-D, VGA, S-Video, BNC, Audio & remote controller
- ▶ PIP & Picture by Picture viewing efficiency
- ▶ 6mm aluminum front bezel with protective glass & water proof sealed gasket
- ▶ Green LED-backlit panel technology
- ▶ Rugged construction against external impact

Options

- 3G / HD / SD-SDI Broadcast-grade input
- **MCS** Multi-display control solution
- Resistive / Capacitive (1-point touch)
- MIL-type or lockable connector
- DC power : 12V / 24V / 48V / 125V / 250V

Basic I/O



Specifications

• LCD Panel

Size (diagonal) :	17.1" Widescreen TFT
Max resolution :	1920 x 1200
Brightness (cd/m2) :	210
Backlight :	LED
Colors :	16.7 M, 8-bit
Contrast ratio (typ) :	600 : 1
Viewing angle (H/V) :	130° x 110°
Active area (mm) :	367 x 230
MTBF (hrs) :	20,000
Video input :	HDMI / DVI-D / VGA / S-Video / BNC

• Speaker :

Built-in Dual Stereo Speakers
2W x 2

• Power Input :

Auto-sensing 100 to 240VAC, 50 / 60Hz

• Power Consumption

Screen on :	Max. 34W
Power saving mode :	Max. 4W
Power button on :	Max. 1W

• Environmental

Operating temperature :	0 to 55°C degree
Storage temperature :	-20 to 60°C degree
Operating humidity :	20~90%, non-condensing
Storage humidity :	5 ~90%, non-condensing
Operating altitude :	16,000 ft
Non-operating altitude :	40,000 ft
Shock :	10G acceleration (11ms duration)
Vibration :	5~500Hz 1G RMS random vibration

• Casing Color :

Black (RAL 9005)

• Mounting :

Panel mount / VESA mount

• Regulatory

Safety :	FCC & CE certified
Environmental :	RoHS2 & REACH compliant

• Weight

Net :	4.9 kgs / 10.8 lbs
Gross :	7.7 kgs / 16.9 lbs

• Dimensions

Product :	468.5 x 57.1 x 331 mm / 18.4 x 2.2 x 13 inch
Packing :	615 x 113 x 523 mm / 24.2 x 4.4 x 20.6 inch

Diagrams (mm)

Front View

Side View

Rear View

