

AP-X24 6mm aluminum front bezel




Display Benefits

- ▶ 24" widescreen LCD with 1920 x 1200 native **WUXGA** Ultra high resolution
- ▶ Standard with HDMI, DVI-D, VGA, S-Video, BNC, Audio & remote controller
- ▶ PIP & Picture by Picture viewing efficiency
- ▶ Green LED-backlit panel technology
- ▶ Rugged construction against external impact

Options

- 3G / HD / SD-SDI Broadcast-grade input
- **MCS** Multi-display control solution
- Resistive (1-point touch)
- Protective glass
- DC power : 24V / 48V / 125V / 250V
- MIL-type or lockable connector

Basic I/O



Specifications

• LCD Panel

Size (diagonal) :	24.1" Widescreen TFT
Max resolution :	1920 x 1200
Brightness (cd/m ²) :	300
Backlight :	LED
Colors :	16.7 M
Contrast ratio (typ) :	1000 : 1
Viewing angle (H/V) :	178° x 178°
Active area (mm) :	518 x 324
MTBF (hrs) :	30,000
Video input :	HDMI / DVI-D / VGA / S-Video / RCA

• Speaker :

Built-in Dual Stereo Speakers
10W x 2

• Power Input :

Auto-sensing 100 to 240VAC, 50 / 60Hz

• Power Consumption

Screen on :	Max. 40W
Power saving mode :	Max. 5W
Power button on :	Max. 1W

• Environmental

Operating temperature :	0 to 55°C degree
Storage temperature :	-20 to 60°C degree
Operating humidity :	20~90%, non-condensing
Storage humidity :	5 ~90%, non-condensing
Operating altitude :	16,000 ft
Non-operating altitude :	40,000 ft
Shock :	10G acceleration (11ms duration)
Vibration :	5~500Hz 1G RMS random vibration

• Casing Color :

Black (RAL 9005)

• Mounting :

Panel mount / VESA mount

• Regulatory

Safety :	FCC & CE certified
Environmental :	RoHS2 & REACH compliant

• Weight


Net :	10.9 kgs / 24 lbs
Gross :	14.7 kgs / 32.3 lbs

• Dimensions


Product :	620.4 x 70.1 x 426 mm / 24.4 x 2.8 x 16.8 inch
Packing :	701 x 121 x 685 mm / 27.6 x 4.8 x 27 inch

Diagrams (mm)


Front View

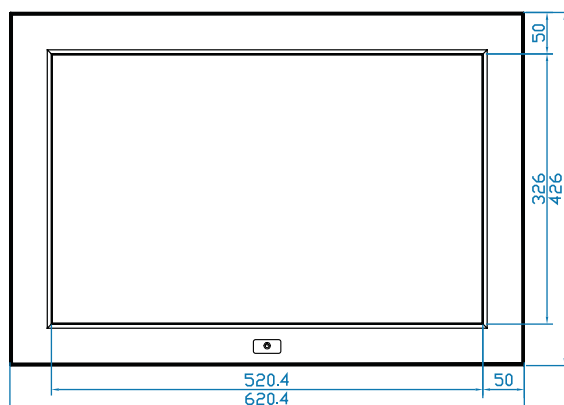

Side View

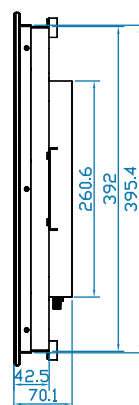

Rear View

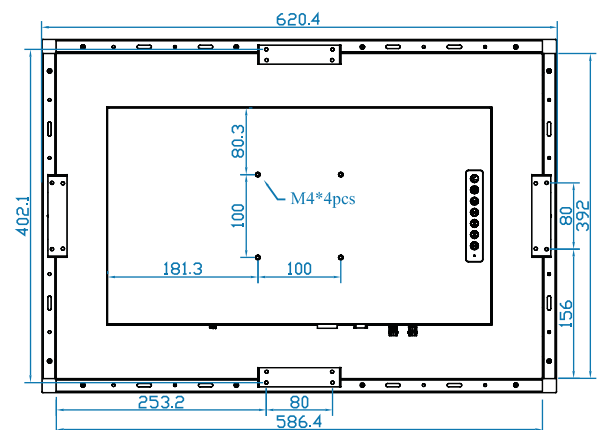

NAP-X24

NEMA 4 / IP65
front protection




Display Benefits

- ▶ 24" widescreen LCD with 1920 x 1200 native **WUXGA** Ultra high resolution
- ▶ Standard with HDMI, DVI-D, VGA, S-Video, BNC, Audio & remote controller
- ▶ PIP & Picture by Picture viewing efficiency
- ▶ 6mm aluminum front bezel with protective glass & water proof sealed gasket
- ▶ Green LED-backlit panel technology
- ▶ Rugged construction against external impact

Options

- 3G / HD / SD-SDI Broadcast-grade input
- **MCS** Multi-display control solution
- Resistive (1-point touch)
- MIL-type or lockable connector
- DC power : 24V / 48V / 125V / 250V

Basic I/O



Specifications

• LCD Panel

Size (diagonal) :	24.1" Widescreen TFT
Max resolution :	1920 x 1200
Brightness (cd/m2) :	300
Backlight :	LED
Colors :	16.7 M
Contrast ratio (typ) :	1000 : 1
Viewing angle (H/V) :	178° x 178°
Active area (mm) :	518 x 324
MTBF (hrs) :	30,000
Video input :	HDMI / DVI-D / VGA / S-Video / RCA

• Speaker :

Built-in Dual Stereo Speakers
10W x 2

• Power Input :

Auto-sensing 100 to 240VAC, 50 / 60Hz

• Power Consumption

Sreen on :	Max. 40W
Power saving mode :	Max. 5W
Power button on :	Max. 1W

• Environmental

Operating temperature :	0 to 55°C degree
Storage temperature :	-20 to 60°C degree
Operating humidity :	20~90%, non-condensing
Storage humidity :	5 ~90%, non-condensing
Operating altitude :	16,000 ft
Non-operating altitude :	40,000 ft
Shock :	10G acceleration (11ms duration)
Vibration :	5~500Hz 1G RMS random vibration

• Casing Color :

Black (RAL 9005)

• Mounting :

Panel mount / VESA mount

• Regulatory

Safety :	FCC & CE certified
Environmental :	RoHS2 & REACH compliant

• Weight


Net :	12.8 kgs / 28.2 lbs
Gross :	16.6 kgs / 36.5 lbs

• Dimensions


Product :	620.4 x 70.1 x 426 mm / 24.4 x 2.8 x 16.8 inch
Packing :	701 x 121 x 685 mm / 27.6 x 4.8 x 27 inch

Diagrams (mm)

Front View

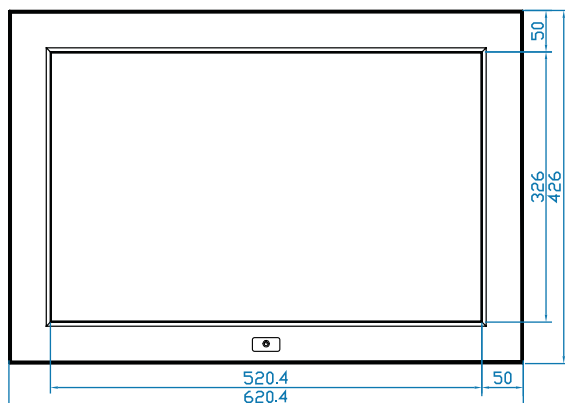

Side View

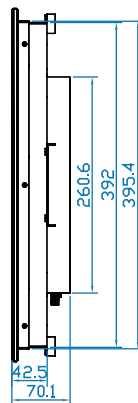

Rear View

