

### OP-15 Universal open frame mounting

#### Display Benefits

- ▶ 15" LCD with resolution 1024 x 768
- ▶ Rugged construction against external impact

#### Options


- S-Video + Composite ( BNC )
- DVI-D or Audio input
- Projected Capacitive ( 10-point touch )  
Resistive / Capacitive ( 1-point touch )
- DC power : 12V / 24V / 48V
- TV - Analog



#### Basic I/O



#### AV2.2 upgrade I/O



### Specifications

#### LCD Panel

Manufacturer :	<b>AUO</b>
Size (diagonal) :	15" TFT
Max resolution :	1024 x 768
Brightness (cd/m <sup>2</sup> ) :	250
Backlight :	CCFL
Colors :	16.2 M
Contrast ratio (typ) :	700 : 1
Viewing angle (H/V) :	150° x 135°
Active area (mm) :	304 x 228
MTBF (hrs) :	30,000
Video input :	VGA

#### Speaker :

Built-in Dual Stereo Speakers 2W x 2  
( Bundled with AV2.2 upgrade )

#### Power Input :

Auto-sensing 100 to 240VAC, 50 / 60Hz

#### Power Consumption

Screen on :	Max. 22W
Power saving mode :	Max. 4W
Power button on :	Max. 1W

#### Environmental

Operating temperature :	0 to 55°C degree
Storage temperature :	-20 to 60°C degree
Operating humidity :	20~90%, non-condensing
Storage humidity :	5 ~90%, non-condensing
Operating altitude :	16,000 ft
Non-operating altitude :	40,000 ft
Shock :	10G acceleration ( 11ms duration )
Vibration :	5~500Hz 1G RMS random vibration

#### Casing Color :

Black ( RAL 9005 )

#### Mounting :

Universal mount / VESA mount

#### Regulatory

Safety :	FCC & CE certified
Environmental :	RoHS2 & REACH compliant

#### Weight


Net :	3.5 kgs / 7.7 lbs
Gross :	6.1 kgs / 13.4 lbs

#### Dimensions


Product :	404 x 53.1 x 310.6 mm / 15.9 x 2.1 x 12.2 inch
Packing :	615 x 113 x 523 mm / 24.2 x 4.4 x 20.6 inch

#### Diagrams ( mm )


Front View

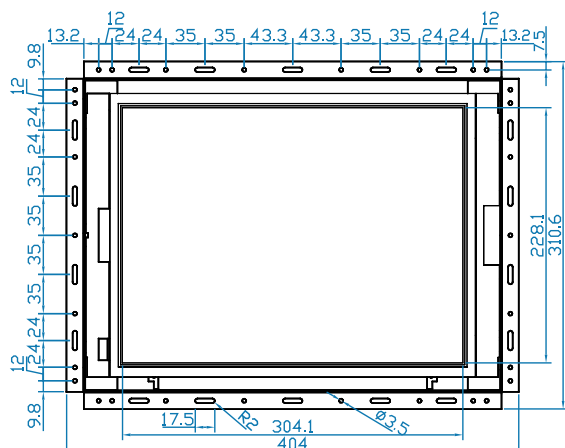

Side View



Rear View

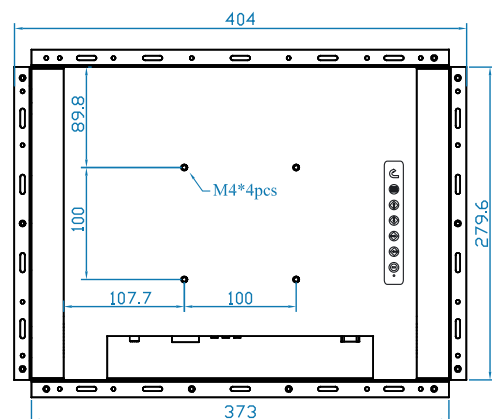

\*\*Dimension will be changed if Multi-touch required