

OP-19 Universal open frame mounting

Display Benefits


- ▶ 19" LCD with resolution 1280 x 1024
- ▶ Green LED-backlit panel technology
- ▶ Rugged construction against external impact

Options


- 3G / HD / SD-SDI Broadcast-grade input
- MCS Multi-display control solution
- Projected Capacitive (10-point touch)
Resistive / Capacitive (1-point touch)
- S-Video + Composite (BNC) or Audio input
- HDMI or DVI-D (either one for AV2.2 upgrade)
- MIL-type or lockable connector
- DC power : 12V / 24V / 48V / 125V / 250V
- Quad display for CCTV
- TV - Analog




Basic I/O



AV2.2D upgrade I/O



AV3.0 upgrade I/O* with advanced features



AV2.2H upgrade I/O



*Casing dimensions will be changed

Specifications

• LCD Panel

Manufacturer :	AUO
Size (diagonal) :	19" TFT
Max resolution :	1280 x 1024
Brightness (cd/m2) :	250
Backlight :	LED
Colors :	16.7 M
Contrast ratio (typ) :	1000 : 1
Viewing angle (H/V) :	170° x 160°
Active area (mm) :	376 x 301
MTBF (hrs) :	30,000
Video input :	VGA or DVI-D

- **Speaker :** Built-in Dual Stereo Speakers 2W x 2 (Bundled with AV2.2 upgrade)

- **Power Input :** Auto-sensing 100 to 240VAC, 50 / 60Hz

• Power Consumption

Sreen on :	Max. 25W
Power saving mode :	Max. 4W
Power button on :	Max. 1W

• Environmental

Operating temperature :	0 to 55°C degree
Storage temperature :	-20 to 60°C degree
Operating humidity :	20~90%, non-condensing
Storage humidity :	5 ~90%, non-condensing
Operating altitude :	16,000 ft
Non-operating altitude :	40,000 ft
Shock :	10G acceleration (11ms duration)
Vibration :	5~500Hz 1G RMS random vibration

- **Casing Color :** Black (RAL 9005)

- **Mounting :** Universal mount / VESA mount

• Regulatory

Safety :	FCC & CE certified
Environmental :	RoHS2 & REACH compliant

• Weight


Net :	5.7 kgs / 12.5 lbs
Gross :	8.5 kgs / 18.7 lbs

• Dimensions

Product :	473.5 x 57.6 x 381.1 mm / 18.6 x 2.3 x 15 inch
Packing :	651 x 124 x 597 mm / 25.6 x 4.9 x 23.5 inch

Diagrams (mm)

Front View

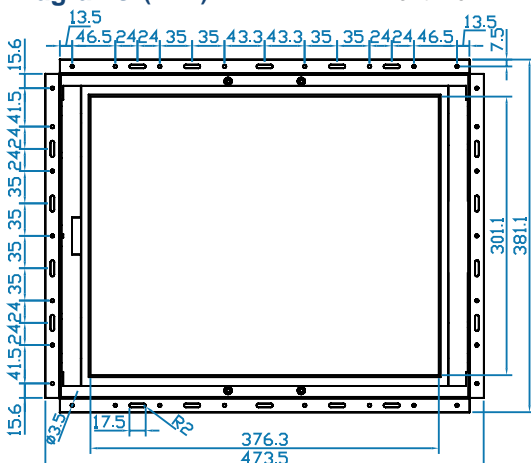

Side View



Rear View

