

OP-X24 Universal open frame mounting




Display Benefits

- ▶ 24" widescreen LCD with 1920 x 1200 native **WUXGA** Ultra high resolution
- ▶ Standard with HDMI, DVI-D, VGA, S-Video, RCA, Audio & remote controller
- ▶ PIP & Picture by Picture viewing efficiency
- ▶ Green LED-backlit panel technology
- ▶ Rugged construction against external impact

Options

- 3G / HD / SD-SDI Broadcast-grade input
- **MCS** Multi-display control solution
- Resistive (1-point touch)
- DC power : 24V / 48V / 125V / 250V
- MIL-type or lockable connector

Basic I/O



Specifications

• LCD Panel

- Size (diagonal) : 24.1" Widescreen TFT
- Max resolution : 1920 x 1200
- Brightness (cd/m2) : 300
- Backlight : LED
- Colors : 16.7 M
- Contrast ratio (typ) : 1000 : 1
- Viewing angle (H/V) : 178° x 178°
- Active area (mm) : 518 x 324
- MTBF (hrs) : 30,000
- Video input : HDMI / DVI-D / VGA / S-Video / RCA

• Speaker :

Built-in Dual Stereo Speakers
10W x 2

• Power Input :

Auto-sensing 100 to 240VAC, 50 / 60Hz

• Power Consumption

- Screen on : Max. 40W
- Power saving mode : Max. 5W
- Power button on : Max. 1W

• Environmental

- Operating temperature : 0 to 55°C degree
- Storage temperature : -20 to 60°C degree
- Operating humidity : 20~90%, non-condensing
- Storage humidity : 5 ~90%, non-condensing
- Operating altitude : 16,000 ft
- Non-operating altitude : 40,000 ft
- Shock : 10G acceleration (11ms duration)
- Vibration : 5~500Hz 1G RMS random vibration

• Casing Color :

Black (RAL 9005)

• Mounting :

Universal mount / VESA mount

• Regulatory

- Safety : FCC & CE certified
- Environmental : RoHS2 & REACH compliant

• Weight


- Net : 9 kgs / 19.8 lbs
- Gross : 12.7 kgs / 27.9 lbs

• Dimensions


- Product : 617.4 x 63.6 x 423 mm / 24.3 x 2.5 x 16.7 inch
- Packing : 701 x 121 x 685 mm / 27.6 x 4.8 x 27 inch

Diagrams (mm)

Front View

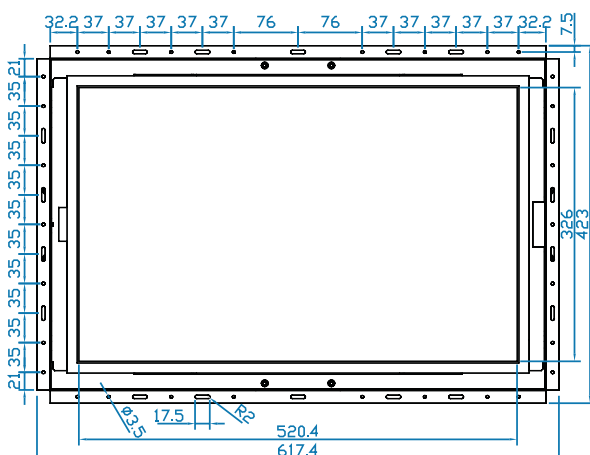

Side View

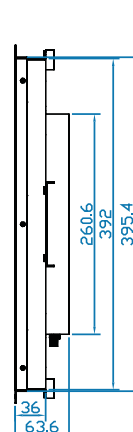

Rear View

