



Benefits

- ▶ 1U keyboard drawer
- ▶ US compact keyboard with touchpad
- ▶ Short depth design of 400mm
- ▶ Enhanced aesthetics with molded front panel and two point lock
- ▶ 2-year standard warranty (upgradable up to 5 years)

Product Specifications

Console Port	
KB / MS	Combo (USB or PS2)
KB / MS 6ft cable : EKC-2	Drawer end : DB-15 (USB KB / MS) Server end : USB type A



Physical		
Dimensions (W x D x H)	Product	442 x 400 x 44 mm 17.4 x 15.7 x 1.73 inch
	Packing	582 x 500 x 100 mm 22.9 x 19.7 x 3.9 inch
Weight	Net	8.6 kg / 18.9 lb
	Gross	10.1 kg / 22.2 lb

Mounting Distance	
Keyboard drawer	410 ~ 640 mm 16.1 ~ 25.2 inch

Environment	
Operating temp.	-20 to 65°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	20~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration


Compliance	
EMC	FCC & CE certified
Safety	CE / LVD certified
Environment	RoHS2 & REACH compliant

Diagrams (mm)

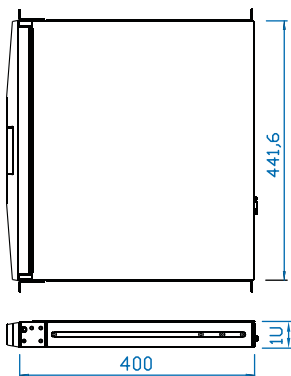

Standard Keyboard

t Compact keyboard integrated with touchpad

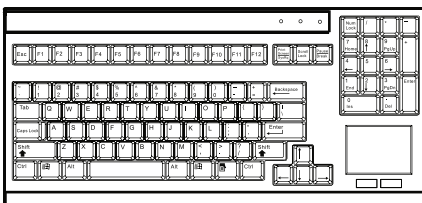

Supporting layouts

America United States