


DVI-D KVM

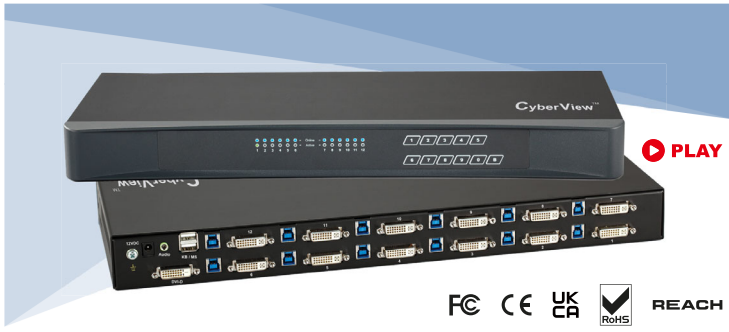

FC CE UK CA RoHS REACH

Benefits

- DVI-D KVM with 12 ports in 1U
- Local console & KVM ports support resolution up to 1920 x 1200
- Multi-platform for PC, server, Blade Server & SUN / MAC
- Port switching via front button & keyboard hotkeys
- Hot pluggable, no software or drivers required


Options

- DC power options : 12V / 24V / 48V / 125V

Basic Models - local console x 1

Audio Local Console

CV-1201D




KVM Port	
Port # :	12
Connector :	DVI-D + USB type B (KB / MS & Analog audio)
Connectivity :	DVI-D + USB KB / MS + Audio 4-in-1 KVM cable (6 / 15 feet)
Resolution :	16:9 - max. 1920 x 1080 / 16:10 - max. 1920 x 1200 / 4:3 - max. 1600 x 1200
Local Console	
Graphic Connector :	1 x DVI-D single link
Input device :	2 x USB type A for keyboard & mouse
Audio out :	1 x 3.5mm stereo audio
Resolution :	16:9 - max. 1920 x 1080 / 16:10 - max. 1920 x 1200 / 4:3 - max. 1600 x 1200

Local console & KVM port connection



CI - 6 / 15
6 / 15 ft DVI-D KVM cable

Local Console
DVI-D + USB
KB / MS

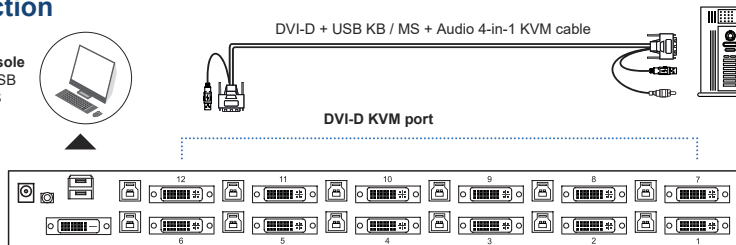

Management	
Port switching	Front button & keyboard hotkeys

Compatibility	
Hardware	HP / IBM / Dell PC, Server and Blade Server SUN / Mac
OS support	Windows / Linux / Unix / Mac OS

Environment	
Operating temp.	0 to 55°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	10~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration

Power	
Input	Auto-sensing 100 to 240VAC, 50 / 60Hz
Consumption	Max. 13W

Compliance	
EMC	FCC & CE
Safety	CE / LVD & UKCA
Environment	REACH & RoHS3 / WEEE

Physical	
Product (W x D x H)	443 x 171 x 44 mm 17.4 x 6.7 x 1.73 inch
Packing (W x D x H)	400 x 500 x 140 mm 15.8 x 19.7 x 5.5 inch
Weight	Net 2.5 kg / 5.5 lb
	Gross 5.4 kg / 11.9 lb
Chassis color	Dark
Chassis materials	Steel