


Cat6 KVM



Options

- DC power options : 12V / 24V / 48V / 125V
- Dual power with failover

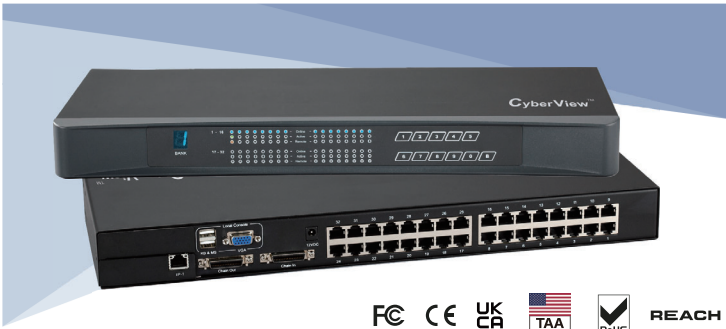

DG-100C
USB-C dongle



DG-100P
DP-USB dongle



DG-100H
HDMI-USB dongle



DG-100SD
DVI-USB dongle



DG-100S
VGA-USB dongle


Benefits

- Cat6 KVM with 8, 16 or 32 ports in 1U
- Cat6 dongle available for USB-C, DP, HDMI, DVI-D or VGA video input
- Local console & KVM ports support resolution up to 1920 x 1200
- Multi-platform for PC, server, Blade Server & SUN / MAC
- Port switching via OSD, front button & keyboard hotkeys
- Multi lingual OSD menu
- Hot pluggable, no software or drivers required
- Cascade levels up to 8 KVM switches
- TAA Compliant


Basic Models - local console x 1



U-801



U-1601



U-3201


KVM Port

Port # :	8, 16 or 32
Connector :	RJ-45
Connectivity :	DP / HDMI / DVI-D / VGA dongle via Cat6 / Cat5 cable to server up to 40 meters (132 feet)
Resolution :	16:10 - max. 1920 x 1200 16:9 - max. 1920 x 1080 4:3 - max. 1600 x 1200


Local Console

Graphic Connector :	1 x DB-15 VGA
Input device :	2 x USB type A for keyboard & mouse
Resolution :	16:10 - max. 1920 x 1200 16:9 - max. 1920 x 1080 4:3 - max. 1600 x 1200


IP Models - local console + IP console



U-IP802



U-IP1602



U-IP3202

IP Console

Connector :	RJ45
User management :	1 x active user, 15-user login
Network protocol :	DHCP / BOOTP / DNS
Security :	TLS 1.3, AES, LDAP, Active Directory (AD), HTTP(s)
Browser :	Chrome, Firefox, Edge, etc.
Resolution :	16:9 - max. 1920 x 1080 / 16:10 - max. 1920 x 1200 / 4:3 - max. 1600 x 1200




High Performance KVM Access Over IP


Remote Models - local console + remote console



U-802



U-1602



U-3202


Remote Console

Connector :	RJ45
Connection :	via Cat5 / Cat6 cable to receiver box
Receiver box I/O :	VGA + 2 x USB type A for keyboard & mouse
Resolution :	16:9 - (1920 x 1080) Max. 50 meters 16:10 - (1920 x 1200) Max. 50 meters 16:10 - (1440 x 900) Max. 100 meters 4:3 - (1600 x 1200) Max. 100 meters 4:3 - (1280 x 1024) Max. 150 meters




Receiver box


Local console & KVM port connection

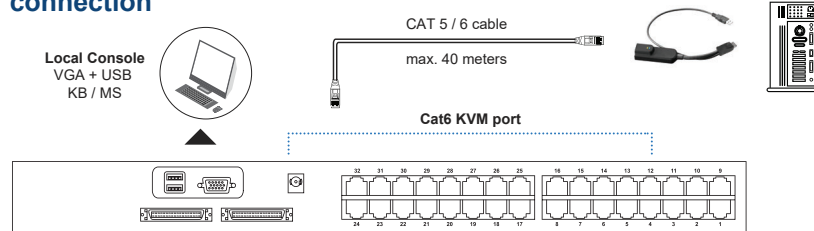

IP console connection

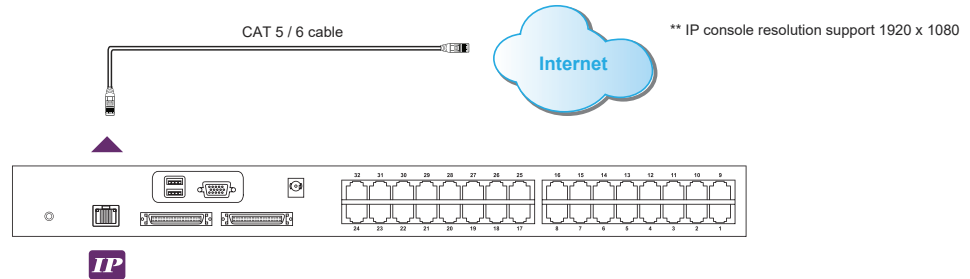


Remote console connection

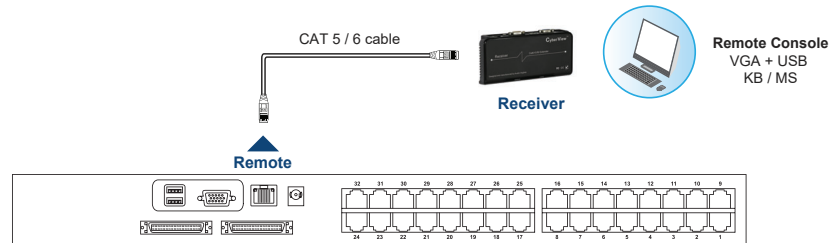

KVM Cascade

- up to 8-level
- Via KVM cascade cable
- Level 2 - 8 KVM must be basic models
- 11st level KVM control all expansion KVMs

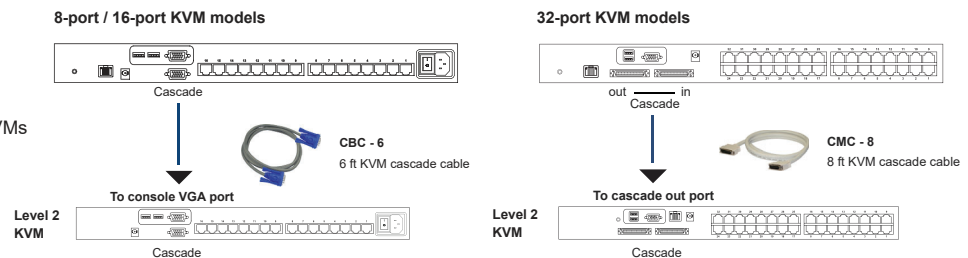

Management

Port switching	OSD, front button & keyboard hotkeys
Expansion	8-level cascade up to 256 servers

Compatibility

Hardware	HP / IBM / Dell PC, Server and Blade Server SUN / Mac
OS support	Windows / Linux / Unix / Mac OS

Environment

Operating temp.	0 to 55°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	10~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration

Power

Model	8-port / 16-port	32-port
Input	Auto sensing 100~240VAC, 50/60 Hz	AC power adaptor
Consumption	Max. 11W	Max. 34W

Compliance

EMC	FCC & CE
Safety	CE / LVD & UKCA
Environment	REACH & RoHS3 / WEEE

Physical

Product (W x D x H)	443 x 171 x 44 mm 17.4 x 6.7 x 1.73 inch
Packing (W x D x H)	400 x 500 x 140 mm 15.8 x 19.7 x 5.5 inch
Weight	Net 2.5 kg / 5.5 lb Gross 5.4 kg / 11.9 lb
Chassis color	Dark
Chassis materials	Steel