


1-Phase Dual Feed Switched + Outlet measurement PDU specification drawing

208V 20A / 30A PDU : C13 x 16 + C19 x 4

unit : inch

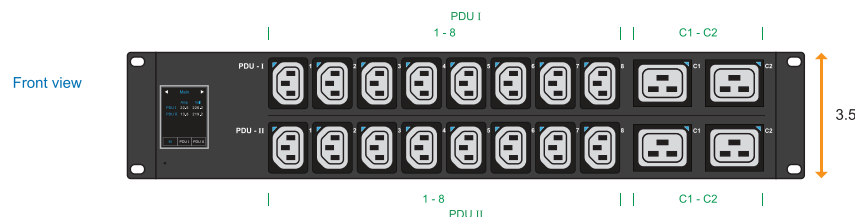

Rear view



Circuit Protection	Code
Fuse	F
MCB	CR



NEMA L6-30P

30A model :	Circuit Protection
DH16C13/4C19-30A-WSi/ F _L630/3B- 1	Resettable Fuse x 4
DH16C13/4C19-30A-WSi/ CR _L630/3B- 1	1-pole MCB x 4

Input Rating : 30Amp, 208V
Cordset : 10 feet UL SJT 10 AWG cordset x 2
Protection : 16A resettable fuse or 16A hydraulic MCB x 4
PDU I : < **Circuit A** > Output 12A max., C13 #1-4 + C19 #C1
< **Circuit B** > Output 12A max., C13 #5-8 + C19 #C2
PDU II : < **Circuit A** > Output 12A max., C13 #1-4 + C19 #C1
< **Circuit B** > Output 12A max., C13 #5-8 + C19 #C2
Weight : Net - lb / Gross - lb

Chassis Color	Code
Black	1
White	2
Red	3
Blue	4
Green	5
Orange	6
Yellow	7
Purple	8

Standard color: Black



NEMA L6-20P

20A model :	Circuit Protection
DH16C13/4C19-20A-WSi/ F _L620/3B- 1	Resettable Fuse x 2
DH16C13/4C19-20A-WSi/ CR _L620/3B- 1	1-pole MCB x 2

Input Rating : 20Amp, 208V
Cordset : 10 feet UL SJT 12 AWG cordset x 2
Protection : 20A resettable fuse or 20A hydraulic MCB x 2
PDU I : Output 16A max., C13 #1-8 + C19 #C1-C2
PDU II : Output 16A max., C13 #1-8 + C19 #C1-C2
Weight : Net - lb / Gross - lb

Operating Temperature : -5 to 60 °C
Storage Temperature : -25 to 65 °C
Operating Altitude : 0 to 2,000 m
Storage Altitude : 0 to 15,000 m
Humidity : 8 to 95% RH, non-condensing

AUSTIN HUGHES
Design. Manufacturing. Global Services.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Copyright 2023 Austin Hughes Electronics Ltd. All rights reserved.

Meter Features (WSi Switched PDU + Outlet Measurement)

Local Display : Field replaceable 2.0" color LCD with touchscreen
Bank Measurement : Current (A), Energy (kWh), Voltage (V) & Power factor
Outlet Measurement : Current (A), Energy (kWh)
Outlet Control : Outlet Switch ON / OFF
Accuracy : ±1% Billing-grade
IP Access : via IP dongle, one IP Access up to 32 PDU Levels
Cascade : Up to 32 PDU under single IP address via IP dongle
SNMP : V2 / V3 via IP dongle
Sensor Port x 2 : Temp. Sensor / Temp. + Humid. Sensor

IP dongle (option)

- Dual LAN Network Failover
- 10/100 Ethernet & Gigabit Ethernet standard
- Enterprise IP Authentication, LDAPv3 / LDAPS, Active Directory®, RADIUS protocol

EMC Compliance : FCC Part 15 Subpart B (Class A)
Safety Compliance : Tested to UL60730-1:2016 and CAN/CSA-E60730-1:2015
Tested to UL62368-1:2014 and CAN/CSA-C22.2 No.62368-1:2014
Environment Compliance : RoHS3 & REACH

Product Dimension : 17.4 (W) x 15 (D) x 3.5 (H) inch
Packing dimension : 21.3 (W) x 21.3 (D) x 5.9 (H) inch