


1-Phase Dual Feed Metered PDU specification drawing

208V 20A / 30A PDU : C13 x 32 + C19 x 8

unit : inch

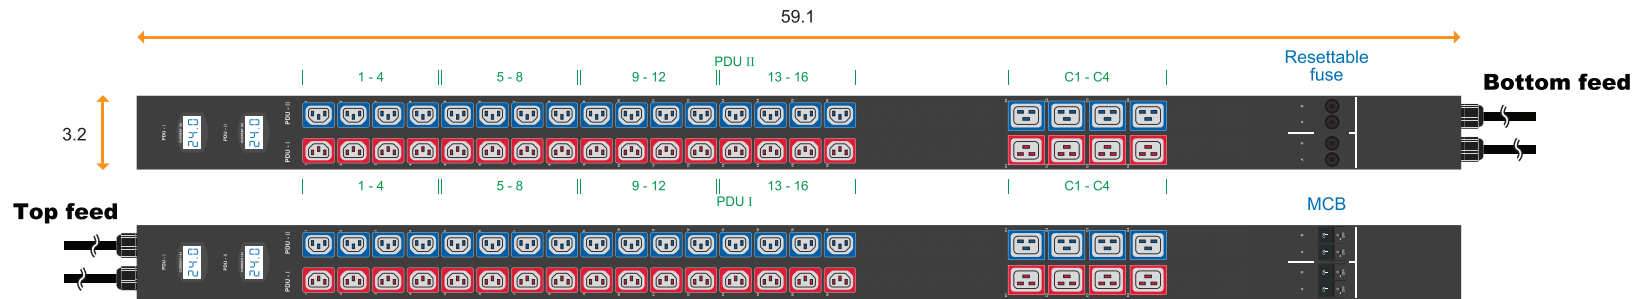

Circuit Protection	Code
Fuse	F
MCB	CR



NEMA L6-30P

30A model :	Circuit Protection
DV32C13/8C19-30A-MD/ F _L630/3 B -1	Resettable Fuse x 4
DV32C13/8C19-30A-MD/ CR _L630/3 T -1	1-pole MCB x 4

Input Rating : 30Amp, 208V
 Cordset : 10 feet UL SJT 10 AWG cordset
 Protection : 16A resettable fuse or 16A hydraulic MCB x 4
 PDU I : < **Circuit A** > Output 12A max., C13 #1-8 + C19 #C1-C2
 < **Circuit B** > Output 12A max., C13 #9-16 + C19 #C3-C4
 PDU II : < **Circuit A** > Output 12A max., C13 #1-8 + C19 #C1-C2
 < **Circuit B** > Output 12A max., C13 #9-16 + C19 #C3-C4
 Weight : Net 27.5 lb / Gross 31.9 lb

PDU Feed	Code
Bottom	B
Top	T



NEMA L6-20P

20A model :	Circuit Protection
DV32C13/8C19-20A-MD/ F _L620/3 B -1	Resettable Fuse x 2
DV32C13/8C19-20A-MD/ CR _L620/3 T -1	1-pole MCB x 2

Input Rating : 20Amp, 208V
 Cordset : 10 feet UL SJT 12 AWG cordset
 Protection : 20A resettable fuse or 20A hydraulic MCB x 2
 PDU I : Output 16A max., C13 #1-16 + C19 #C1-C4
 PDU II : Output 16A max., C13 #1-16 + C19 #C1-C4
 Weight : Net 27.5 lb / Gross 31.9 lb

Operating Temperature : -5 to 60 °C
 Storage Temperature : -25 to 65 °C
 Operating Altitude : 0 to 2,000 m
 Storage Altitude : 0 to 15,000 m
 Humidity : 8 to 95% RH, non-condensing

Meter Features (MD metered PDU)
 Local Display : 3-digit LED ammeter measuring input load current
 Measurement : Current (A)
 Accuracy : ± (3% of the reading + 5 digits) RMS

EMC Compliance : FCC Part 15 Subpart B (Class A)
 Safety Compliance : Tested to UL60730-1:2016 and CAN/CSA-E60730-1:2015
 Tested to UL62368-1:2014 and CAN/CSA-C22.2 No.62368-1:2014
 Environment Compliance : RoHS3 & REACH