


1-Phase Dual Feed switched PDU specification drawing

230V 16A / 20A / 32A PDU : C13 x 32 + C19 x 8

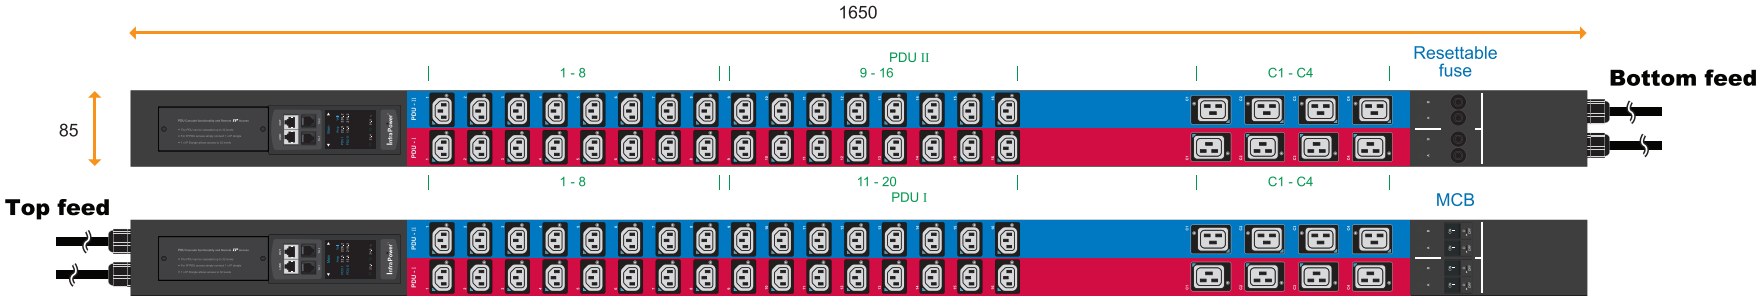

IEC 60309 Inlet

32A model :	Circuit Protection
DV32C13/8C19-32A-WS/ F _EN/3 B -1	Resettable Fuse x 4
DV32C13/8C19-32A-WS/ CR _EN/3 T -1	1-pole MCB x 4

Input Rating : 32Amp, 230V
Cordset : 3 meter 4.0mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 4
PDU I : < **Circuit A** > Output 16A max., C13 #1-8 + C19 #C1-C2
< **Circuit B** > Output 16A max., C13 #9-16 + C19 #C3-C4
PDU II : < **Circuit A** > Output 16A max., C13 #1-8 + C19 #C1-C2
< **Circuit B** > Output 16A max., C13 #9-16 + C19 #C3-C4
Weight : Net 12.5 kg / Gross 14.5 kg



Open end

20A model :	Circuit Protection
DV32C13/8C19-20A-WS/ F _OE/3 B -1	Resettable Fuse x 2
DV32C13/8C19-20A-WS/ CR _OE/3 T -1	1-pole MCB x 2

Input Rating : 20Amp, 230V
Cordset : 3 meter 2.5mm sq. H05V V-F cordset
Protection : 20A resettable fuse or 20A hydraulic MCB x 2
PDU I : Output 20A max., C13 #1-16 + C19 #C1-C4
PDU II : Output 20A max., C13 #1-16 + C19 #C1-C4
Weight : Net 12.5 kg / Gross 14.5 kg



IEC 60309 Inlet

16A model :	Circuit Protection
DV32C13/8C19-16A-WS/ F _EN/3 B -1	Resettable Fuse x 2
DV32C13/8C19-16A-WS/ CR _EN/3 T -1	1-pole MCB x 2

Input Rating : 16Amp, 230V
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 2
PDU I : Output 16A max., C13 #1-16 + C19 #C1-C4
PDU II : Output 16A max., C13 #1-16 + C19 #C1-C4
Weight : Net 12.5 kg / Gross 14.5 kg



IEC320 C20

16A model :	Circuit Protection
DV32C13/8C19-16A-WS/ F _C20/3 B -1	Resettable Fuse x 2
DV32C13/8C19-16A-WS/ CR _C20/3 T -1	1-pole MCB x 2

Input Rating : 16Amp, 230V
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 2
PDU I : Output 16A max., C13 #1-16 + C19 #C1-C4
PDU II : Output 16A max., C13 #1-16 + C19 #C1-C4
Weight : Net 12.5 kg / Gross 14.5 kg

Operating Temperature : -5 to 60 °C
Storage Temperature : -25 to 65 °C
Operating Altitude : 0 to 2,000 m
Storage Altitude : 0 to 15,000 m
Humidity : 8 to 95% RH, non-condensing

AUSTIN HUGHES
Design. Manufacturing. Global Services.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Copyright 2023 Austin Hughes Electronics Ltd. All rights reserved.

Meter Features (WS Switched PDU)
Local Display : Field replaceable 2.8" color LCD with touchscreen
Bank Measurement : Voltage (V), Current (A), energy (kWh) & power factor
Outlet Control : Outlet Switch ON / OFF
Accuracy : ±1% Billing-grade
IP Access : via IP dongle, one IP Access up to 32 PDU Levels
Cascade : Up to 32 PDU under single IP address via IP dongle
SNMP : V2 / V3 via IP dongle
Sensor Port x 2 : Temp. Sensor / Temp. + Humid. Sensor

IP dongle (option)
- Dual LAN Network Failover
- 10/100 Ethernet & Gigabit Ethernet standard
- Enterprise IP Authentication, LDAPv3 / LDAPS, Active Directory®, RADIUS protocol

EMC Compliance : CE / EMC
Safety Compliance : CE / LVD & UKCA
Tested to EN 62368-1:2014 / A11:2017 standard
Tested to EN 60730-1:2016 / A1:2019 standard
Environment Compliance : RoHS3 & REACH

Product Dimension : 85 (W) x 90 (D) x 1650 (H) mm
Packing dimension : 110 (W) x 268 (D) x 2043 (H) mm