


# 1-Phase Dual Feed Metered PDU specification drawing

208V 20A / 30A PDU : C13 x 32

unit : inch

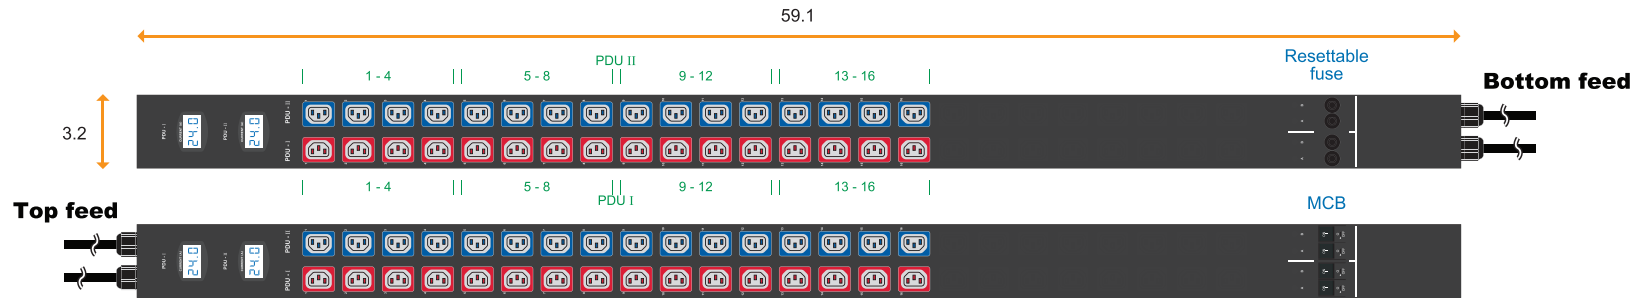

Circuit Protection	Code
Fuse	<b>F</b>
MCB	<b>CR</b>



NEMA L6-30P

30A model :	Circuit Protection
DV32C13-30A-MD/ <b>F</b> _L630/3 <b>B</b> -1	Resettable Fuse x 4
DV32C13-30A-MD/ <b>CR</b> _L630/3 <b>T</b> -1	1-pole MCB x 4

Input Rating : 30Amp, 208V  
 Cordset : 10 feet UL SJT 10 AWG cordset  
 Protection : 16A resettable fuse or 16A hydraulic MCB x 4  
 PDU I : < **Circuit A** > Output 12A max., C13 #1-8  
 < **Circuit B** > Output 12A max., C13 #9-16  
 PDU II : < **Circuit A** > Output 12A max., C13 #1-8  
 < **Circuit B** > Output 12A max., C13 #9-16  
 Weight : Net 27.5 lb / Gross 31.9 lb

PDU Feed	Code
Bottom	<b>B</b>
Top	<b>T</b>



NEMA L6-20P

20A model :	Circuit Protection
DV32C13-20A-MD/ <b>F</b> _L620/3 <b>B</b> -1	Resettable Fuse x 2
DV32C13-20A-MD/ <b>CR</b> _L620/3 <b>T</b> -1	1-pole MCB x 2

Input Rating : 20Amp, 208V  
 Cordset : 10 feet UL SJT 12 AWG cordset  
 Protection : 20A resettable fuse or 20A hydraulic MCB x 2  
 PDU I : Output 16A max., C13 #1-16  
 PDU II : Output 16A max., C13 #1-16  
 Weight : Net 27.5 lb / Gross 31.9 lb

Operating Temperature : -5 to 60 °C  
 Storage Temperature : -25 to 65 °C  
 Operating Altitude : 0 to 2,000 m  
 Storage Altitude : 0 to 15,000 m  
 Humidity : 8 to 95% RH, non-condensing

**Meter Features ( MD metered PDU )**  
 Local Display : 3-digit LED ammeter measuring input load current  
 Measurement : Current ( A )  
 Accuracy : ± ( 3% of the reading + 5 digits ) RMS

EMC Compliance : FCC Part 15 Subpart B (Class A)  
 Safety Compliance : Tested to UL60730-1:2016 and CAN/CSA-E60730-1:2015  
 Tested to UL62368-1:2014 and CAN/CSA-C22.2 No.62368-1:2014  
 Environment Compliance : RoHS3 & REACH

**AUSTIN HUGHES**  
 Design. Manufacturing. Global Services.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Copyright 2023 Austin Hughes Electronics Ltd. All rights reserved.

Product Dimension : 3.2 (W) x 2.8 (D) x 59.1 (H) inch  
 Packing dimension : 4.3 (W) x 10.6 (D) x 70.1 (H) inch