


1-Phase Dual Feed switched PDU specification drawing

230V 16A / 20A / 32A PDU : C13 x 48

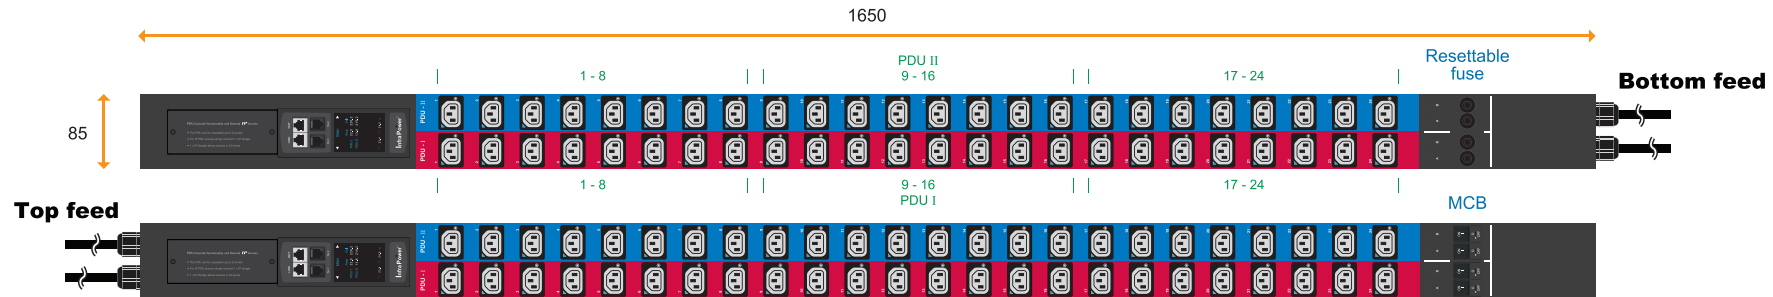

IEC 60309 Inlet

32A model :	Circuit Protection
DV48C13-32A-WS/ F _EN/3 B -1	Resettable Fuse x 4
DV48C13-32A-WS/ CR _EN/3 T -1	1-pole MCB x 4

Input Rating : 32Amp, 230V
Cordset : 3 meter 4.0mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 4
PDU I : < **Circuit A** > Output 16A max., C13 #1-12
< **Circuit B** > Output 16A max., C13 #13-24
PDU II : < **Circuit A** > Output 16A max., C13 #1-12
< **Circuit B** > Output 16A max., C13 #13-24
Weight : Net 12.5 kg / Gross 14.5 kg

Circuit Protection	Code
Fuse	F
MCB	CR



Open end

20A model :	Circuit Protection
DV48C13-20A-WS/ F _OE/3 B -1	Resettable Fuse x 2
DV48C13-20A-WS/ CR _OE/3 T -1	1-pole MCB x 2

Input Rating : 20Amp, 230V
Cordset : 3 meter 2.5mm sq. H05V V-F cordset
Protection : 20A resettable fuse or 20A hydraulic MCB x 2
PDU I : Output 20A max., C13 #1-24
PDU II : Output 20A max., C13 #1-24
Weight : Net 12.5 kg / Gross 14.5 kg

PDU Feed	Code
Bottom	B
Top	T



IEC 60309 Inlet

16A model :	Circuit Protection
DV48C13-16A-WS/ F _EN/3 B -1	Resettable Fuse x 2
DV48C13-16A-WS/ CR _EN/3 T -1	1-pole MCB x 2

Input Rating : 16Amp, 230V
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 2
PDU I : Output 16A max., C13 #1-24
PDU II : Output 16A max., C13 #1-24
Weight : Net 12.5 kg / Gross 14.5 kg



IEC320 C20

16A model :	Circuit Protection
DV48C13-16A-WS/ F _C20/3 B -1	Resettable Fuse x 2
DV48C13-16A-WS/ CR _C20/3 T -1	1-pole MCB x 2

Input Rating : 16Amp, 230V
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 2
PDU I : Output 16A max., C13 #1-24
PDU II : Output 16A max., C13 #1-24
Weight : Net 12.5 kg / Gross 14.5 kg

Operating Temperature : -5 to 60 °C
Storage Temperature : -25 to 65 °C
Operating Altitude : 0 to 2,000 m
Storage Altitude : 0 to 15,000 m
Humidity : 8 to 95% RH, non-condensing

Meter Features (WS Switched PDU)

Local Display : Field replaceable 2.8" color LCD with touchscreen
Bank Measurement : Voltage (V), Current (A), energy (kWh) & power factor
Outlet Control : Outlet Switch ON / OFF
Accuracy : ±1% Billing-grade
IP Access : via IP dongle, one IP Access up to 32 PDU Levels
Cascade : Up to 32 PDU under single IP address via IP dongle
SNMP : V2 / V3 via IP dongle
Sensor Port x 2 : Temp. Sensor / Temp. + Humid. Sensor

IP dongle (option)

- Dual LAN Network Failover
- 10/100 Ethernet & Gigabit Ethernet standard
- Enterprise IP Authentication, LDAPV3 / LDAPs, Active Directory®, RADIUS protocol

EMC Compliance : CE / EMC
Safety Compliance : CE / LVD & UKCA
Tested to EN 62368-1:2014 / A11:2017 standard
Tested to EN 60730-1:2016 / A1:2019 standard
Environment Compliance : RoHS3 & REACH

Product Dimension : 85 (W) x 90 (D) x 1650 (H) mm
Packing dimension : 110 (W) x 268 (D) x 2043 (H) mm