
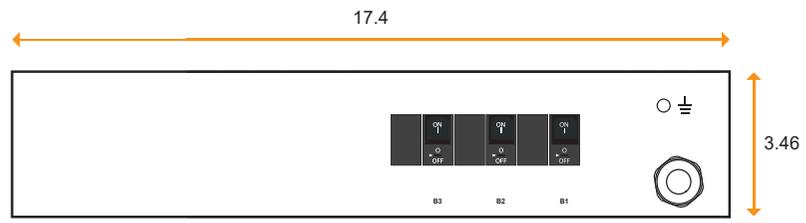


unit : inch

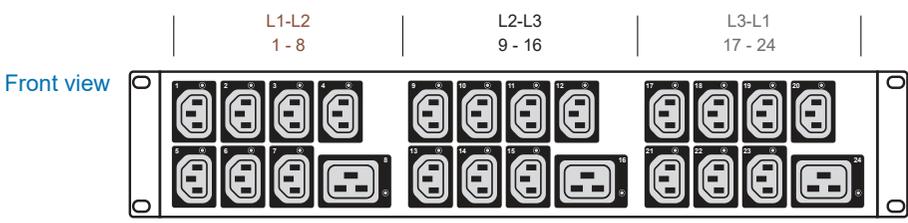

**CR (Circuit Protection)**  
3 x 2-pole 20A Hydraulic MCB

Chassis Color	Code
Black	1
White	2
Red	3
Blue	4
Green	5
Orange	6
Yellow	7
Purple	8

Standard color : Black

30A model 8.7 kVA	HP21C13/3C19-30A-CR_L2130/2B-1	<b>L1-L2</b> Bank 1 : C13 # 1 - 7 + C19 # 8 <b>L2-L3</b> Bank 2 : C13 # 9 - 15 + C19 # 16 <b>L3-L1</b> Bank 3 : C13 # 17 - 23 + C19 # 24 Bank max. Amp. : 16A	<b>30A Inlet</b> NEMA L21-30P 6.6ft Cordset 5W 10AWG UL SJT 
	HP21C13/3C19-30A-CR_L1530/2B-1		<b>30A Inlet</b> NEMA L15-30P 6.6ft Cordset 4W 10AWG UL SJT 
20A model 5.8 kVA	HP21C13/3C19-20A-CR_L2120/2B-1	<b>L1-L2</b> Bank 1 : C13 # 1 - 7 + C19 # 8 <b>L2-L3</b> Bank 2 : C13 # 9 - 15 + C19 # 16 <b>L3-L1</b> Bank 3 : C13 # 17 - 23 + C19 # 24 Bank max. Amp. : 16A	<b>20A Inlet</b> NEMA L21-20P 6.6ft Cordset 5W 12AWG UL SJT 
	HP21C13/3C19-20A-CR_L1520/2B-1		<b>20A Inlet</b> NEMA L15-20P 6.6ft Cordset 4W 12AWG UL SJT 

Remark : In accordance with the National Electrical Code (NEC), the branch-circuit amperage has been derated to 80% of its rated capacity for continuous loads.



Specification	
Operating Temperature	: -5 to 60 °C
Storage Temperature	: -25 to 65 °C
Operating Altitude	: 0 to 2,000 m
Storage Altitude	: 0 to 15,000 m
Humidity (non-condensing)	: 8 to 95% RH
Chassis Material / Color	: Steel / Black
Product Dimension	: 17.4W x 7.9D x 3.46H (inch)
Packing Dimension	: 20.7W x 16.1D x 5.1H (inch)
Net / Gross Weight	: 13.08 lb / 15.25 lb

Safety Certificates	
CB	: IEC 62368-1:2018
UL-US	: UL 62368-1, 3rd Ed, 2021-10-22
UL-CA	: CAN/ CSA C22.2 No. 62368-1:19, 3rd Ed, 2021-10-22
EMC Certificates	
FCC	: FCC 47 CFR Part 15 Subpart B
Environment	
: RoHS, Reach & WEEE	