
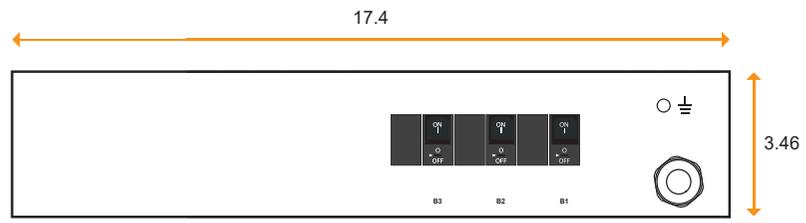


unit : inch

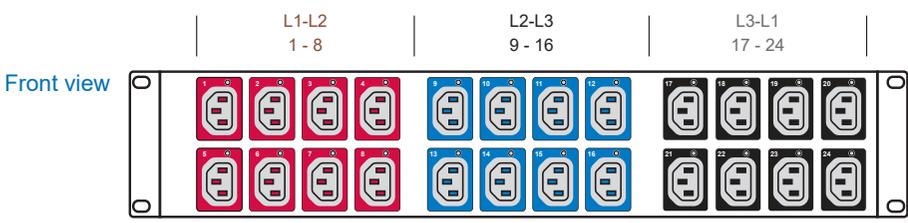

**CR (Circuit Protection)**  
3 x 2-pole 20A Hydraulic MCB

Chassis Color	Code
Black	1
White	2
Red	3
Blue	4
Green	5
Orange	6
Yellow	7
Purple	8

Standard color : Black

30A model 8.7 kVA	HP24C13-30A-CR_L2130/2B-1	L1-L2 Bank 1 : C13 # 1 - 8 L2-L3 Bank 2 : C13 # 9 - 16 L3-L1 Bank 3 : C13 # 17 - 24 Bank max. Amp. : 16A	30A Inlet NEMA L21-30P 6.6ft Cordset 5W 10AWG UL SJT
	HP24C13-30A-CR_L1530/2B-1		30A Inlet NEMA L15-30P 6.6ft Cordset 4W 10AWG UL SJT
20A model 5.8 kVA	HP24C13-20A-CR_L2120/2B-1	L1-L2 Bank 1 : C13 # 1 - 8 L2-L3 Bank 2 : C13 # 9 - 16 L3-L1 Bank 3 : C13 # 17 - 24 Bank max. Amp. : 16A	20A Inlet NEMA L21-20P 6.6ft Cordset 5W 12AWG UL SJT
	HP24C13-20A-CR_L1520/2B-1		20A Inlet NEMA L15-20P 6.6ft Cordset 4W 12AWG UL SJT

Remark :  
In accordance with the National Electrical Code (NEC),  
the branch-circuit amperage has been derated to 80% of its rated capacity for continuous loads.



Specification	
Operating Temperature	: -5 to 60 °C
Storage Temperature	: -25 to 65 °C
Operating Altitude	: 0 to 2,000 m
Storage Altitude	: 0 to 15,000 m
Humidity (non-condensing)	: 8 to 95% RH
Chassis Material / Color	: Steel / Black
Product Dimension	: 17.4W x 7.9D x 3.46H (inch)
Packing Dimension	: 20.7W x 16.1D x 5.1H (inch)
Net / Gross Weight	: 12.96 lb / 15.14 lb

Safety Certificates	
CB	: IEC 62368-1:2018
UL-US	: UL 62368-1, 3rd Ed, 2021-10-22
UL-CA	: CAN/ CSA C22.2 No. 62368-1:19, 3rd Ed, 2021-10-22
EMC Certificates	
FCC	: FCC 47 CFR Part 15 Subpart B
Environment	
	: RoHS, Reach & WEEE