


# 1-Phase Basic PDU specification drawing

110V 15A / 20A / 30A PDU : US x 20

unit : inch

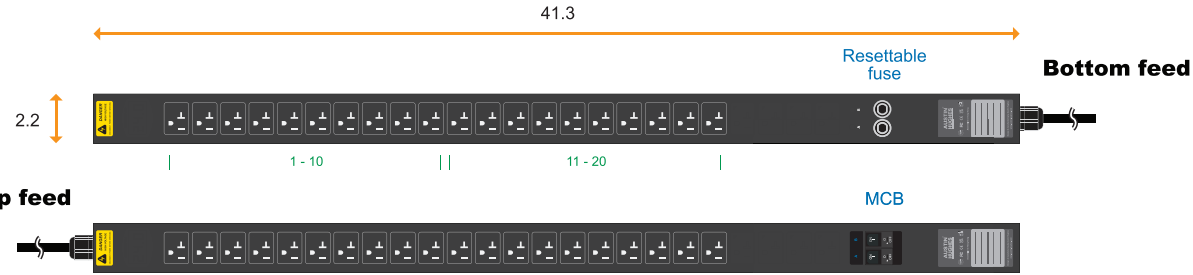

Circuit Protection	Code
Fuse	<b>F</b>
MCB	<b>CR</b>




NEMA 5-30P

30A model :	Circuit Protection
V20US-30A/ <b>F</b> _530/3 <b>B</b> -1	Resettable Fuse x 2
V20US-30A/ <b>CR</b> _530/3 <b>T</b> -1	1-pole MCB x 2

Input Rating : 30Amp, 110V  
Cordset : 10 feet UL SJT 10 AWG cordset  
Protection : 16A resettable fuse or 16A hydraulic MCB x 2  
Circuit A : Output 12A max., US #1-10  
Circuit B : Output 12A max., US #11-20  
Weight : Net 12.00 Lb / Gross 15.10 Lb

PDU Feed	Code
Bottom	<b>B</b>
Top	<b>T</b>



NEMA L5-30P

30A model :	Circuit Protection
V20US-30A/ <b>F</b> _L530/3 <b>B</b> -1	Resettable Fuse x 2
V20US-30A/ <b>CR</b> _L530/3 <b>T</b> -1	1-pole MCB x 2

Input Rating : 30Amp, 110V  
Cordset : 10 feet UL SJT 10 AWG cordset  
Protection : 16A resettable fuse or 16A hydraulic MCB x 2  
Circuit A : Output 12A max., US #1-10  
Circuit B : Output 12A max., US #11-20  
Weight : Net 14.09 Lb / Gross 17.19 Lb

Chassis Color	Code
Black	<b>1</b>
White	<b>2</b>
Red	<b>3</b>
Blue	<b>4</b>
Green	<b>5</b>
Orange	<b>6</b>
Yellow	<b>7</b>
Purple	<b>8</b>



NEMA 5-20P

20A model :	Circuit Protection
V20US-20A/ <b>F</b> _520/3 <b>B</b> -1	Resettable Fuse x 1
V20US-20A/ <b>CR</b> _520/3 <b>T</b> -1	1-pole MCB x 1

Input Rating : 20Amp, 110V  
Cordset : 10 feet UL SJT 12 AWG cordset  
Protection : 20A resettable fuse or 20A hydraulic MCB x 1  
Circuit : Output 16A max., US #1-20  
Weight : Net 11.00 Lb / Gross 14.09 Lb



NEMA L5-20P

20A model :	Circuit Protection
V20US-20A/ <b>F</b> _L520/3 <b>B</b> -1	Resettable Fuse x 1
V20US-20A/ <b>CR</b> _L520/3 <b>T</b> -1	1-pole MCB x 1

Input Rating : 20Amp, 110V  
Cordset : 10 feet UL SJT 12 AWG cordset  
Protection : 20A resettable fuse or 20A hydraulic MCB x 1  
Circuit : Output 16A max., US #1-20  
Weight : Net 11.11 Lb / Gross 14.21 Lb



NEMA 5-15P

15A model :	Circuit Protection
V20US-15A/ <b>F</b> _515/3 <b>B</b> -1	Resettable Fuse x 1
V20US-15A/ <b>CR</b> _515/3 <b>T</b> -1	1-pole MCB x 1

Input Rating : 15Amp, 110V  
Cordset : 10 feet UL SJT 14 AWG cordset  
Protection : 16A resettable fuse or 16A hydraulic MCB x 1  
Circuit : Output 12A max., US #1-20  
Weight : Net 10.57 Lb / Gross 13.67 Lb

Remarks : To comply with UL® / National Electrical Code (NEC), the branch circuit Amp has been de-rated to 80% of the original.

Operating Temperature : -5 to 60 °C  
Storage Temperature : -25 to 65 °C  
Operating Altitude : 0 to 2,000 m  
Storage Altitude : 0 to 15,000 m  
Humidity : 8 to 95% RH, non-condensing

EMC Compliance : FCC Part 15 Subpart B (Class A)  
Safety Compliance : Tested to UL60730-1:2016 and CAN/CSA-E60730-1:2015  
Tested to UL62368-1:2014 and CAN/CSA-C22.2 No.62368-1:2014  
Environment Compliance : RoHS3 & REACH