


# 1-Phase basic PDU specification drawing

208V 20A / 30A PDU : C13 x 24 + C19 x 6

unit : inch

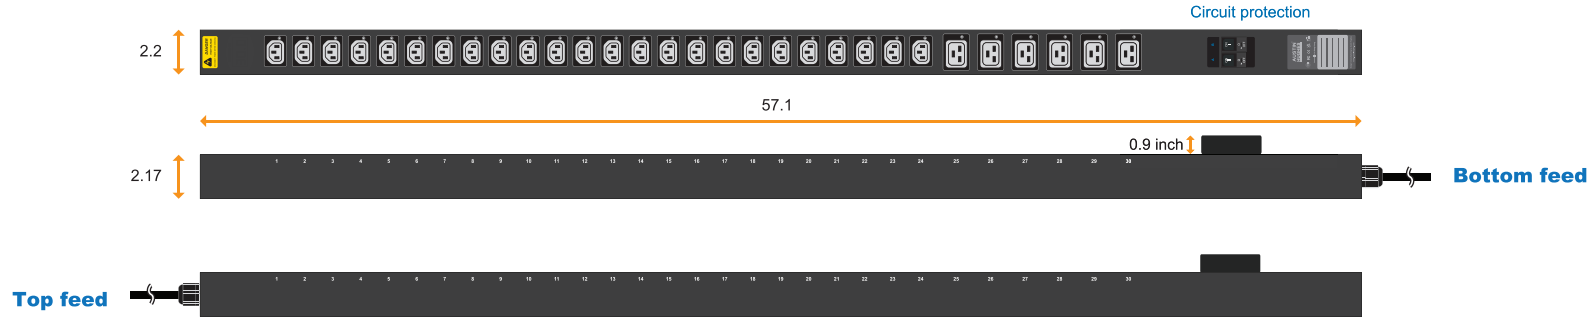

Circuit Protection	Code
Fuse	<b>F</b>
MCB	<b>CR</b>



NEMA L6-30P

30A model :	Circuit Protection
V24C13/6C19-30A- <b>F</b> _L630/3 <b>B</b> -1	Resettable Fuse x 2
V24C13/6C19-30A- <b>CR</b> _L630/3 <b>T</b> -1	1-pole MCB x 2

Input Rating : 30Amp, 208V  
Cordset : 10 feet UL SJT 10 AWG cordset  
Protection : 16A resettable fuse or 16A hydraulic MCB x 2  
Circuit A : Output 12A max., C13 #1-12 + C19 #25-27  
Circuit B : Output 12A max., C13 #13-24 + C19 #28-30  
Weight : Net - lb / Gross - lb

PDU Feed	Code
Bottom	<b>B</b>
Top	<b>T</b>

Chassis Color	Code
Black	<b>1</b>
White	<b>2</b>
Red	<b>3</b>
Blue	<b>4</b>
Green	<b>5</b>
Orange	<b>6</b>
Yellow	<b>7</b>
Purple	<b>8</b>



NEMA L6-20P

20A model :	Circuit Protection
V24C13/6C19-20A- <b>F</b> _L620/3 <b>B</b> -1	Resettable Fuse x 1
V24C13/6C19-20A- <b>CR</b> _L620/3 <b>T</b> -1	1-pole MCB x 1

Input Rating : 20Amp, 208V  
Cordset : 10 feet UL SJT 12 AWG cordset  
Protection : 20A resettable fuse or 20A hydraulic MCB x 1  
Circuit : Output 16A max., C13 #1-24 + C19 #25-30  
Weight : Net - lb / Gross - lb

Standard color : Black

Operating Temperature : -5 to 60 °C  
Storage Temperature : -25 to 65 °C  
Operating Altitude : 0 to 2,000 m  
Storage Altitude : 0 to 15,000 m  
Humidity : 8 to 95% RH, non-condensing

EMC Compliance : FCC Part 15 Subpart B (Class A)  
Safety Compliance : Tested to UL 60730-1:2016 and CAN / CSA-E60730-1:2015  
Tested to UL 62368-1:2014 and CAN / CSA-C22.2 No. 62368-1:2014  
Environment Compliance : RoHS3 & REACH

Product Dimension : 2.2 (W) x 2.17 (D) x 57.1 (H) inch  
Packing Dimension ( for 2 PDUs ) : 4.3 (W) x 10.6 (D) x 70.1 (H) inch