

1-Phase monitored PDU specification drawing

110V 15A / 20A / 30A PDU : US x 36

unit : inch



Circuit Protection	Code
Fuse	F
MCB	CR



NEMA 5-30P

30A model :	Circuit Protection
V36US-30A-W/ F _530/3 B -1	Resettable Fuse x 2
V36US-30A-W/ CR _530/3 T -1	1-pole MCB x 2

Input Rating : 30Amp, 110V
Cordset : 10 feet UL SJT 10 AWG cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 2
Circuit A : Output 12A max., US #1-18
Circuit B : Output 12A max., US #19-36
Weight : Net 17.85 Lb / Gross 22.09 Lb

PDU Feed	Code
Bottom	B
Top	T



NEMA L5-30P

30A model :	Circuit Protection
V36US-30A-W/ F _L530/3 B -1	Resettable Fuse x 2
V36US-30A-W/ CR _L530/3 T -1	1-pole MCB x 2

Input Rating : 30Amp, 110V
Cordset : 10 feet UL SJT 10 AWG cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 2
Circuit A : Output 12A max., US #1-18
Circuit B : Output 12A max., US #19-36
Weight : Net 17.50 Lb / Gross 21.75 Lb

Chassis Color	Code
Black	1
White	2
Red	3
Blue	4
Green	5
Orange	6
Yellow	7
Purple	8



NEMA 5-20P

20A model :	Circuit Protection
V36US-20A-W/ F _520/3 B -1	Resettable Fuse x 1
V36US-20A-W/ CR _520/3 T -1	1-pole MCB x 1

Input Rating : 20Amp, 110V
Cordset : 10 feet UL SJT 12 AWG cordset
Protection : 20A resettable fuse or 20A hydraulic MCB x 1
Circuit : Output 16A max., US #1-36
Weight : Net 16.43 Lb / Gross 20.67 Lb



NEMA L5-20P

20A model :	Circuit Protection
V36US-20A-W/ F _L520/3 B -1	Resettable Fuse x 1
V36US-20A-W/ CR _L520/3 T -1	1-pole MCB x 1

Input Rating : 20Amp, 110V
Cordset : 10 feet UL SJT 12 AWG cordset
Protection : 20A resettable fuse or 20A hydraulic MCB x 1
Circuit : Output 16A max., US #1-36
Weight : Net 16.32 Lb / Gross 20.56 Lb



NEMA 5-15P

15A model :	Circuit Protection
V36US-15A-W/ F _515/3 B -1	Resettable Fuse x 1
V36US-15A-W/ CR _515/3 T -1	1-pole MCB x 1

Input Rating : 15Amp, 110V
Cordset : 10 feet UL SJT 14 AWG cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 1
Circuit : Output 12A max., US #1-36
Weight : Net 15.88 Lb / Gross 20.12 Lb

Remarks : To comply with UL® / National Electrical Code (NEC), the branch circuit Amp has been de-rated to 80% of the original.

Operating Temperature : -5 to 60 °C
Storage Temperature : -25 to 65 °C
Operating Altitude : 0 to 2,000 m
Storage Altitude : 0 to 15,000 m
Humidity : 8 to 95% RH, non-condensing

AUSTIN HUGHES
Design. Manufacturing. Global Services.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Copyright 2023 Austin Hughes Electronics Ltd. All rights reserved.

Meter Features (W monitored PDU)

Local Display : Field replaceable 2.8" color LCD with touchscreen
Bank Measurement : Voltage (V), Current (A), energy (kWh) & power factor
Accuracy : ±1% Billing-grade
IP Access : via IP dongle, one IP Access up to 32 PDU Levels
Cascade : Up to 32 PDU under single IP address via IP dongle
SNMP : V2 / V3 via IP dongle
Sensor Port x 2 : Temp. Sensor / Temp. + Humid. Sensor

IP dongle (option)




- Dual LAN Network Failover
- 10/100 Ethernet & Gigabit Ethernet standard
- Enterprise IP Authentication, LDAPv3 / LDAPS, Active Directory®, RADIUS protocol

EMC Compliance : FCC Part 15 Subpart B (Class A)
Safety Compliance : Tested to UL60730-1:2016 and CAN/CSA-E60730-1:2015
Tested to UL62368-1:2014 and CAN/CSA-C22.2 No.62368-1:2014
Environment Compliance : RoHS3 & REACH

Product Dimension : 3.3 (W) x 3.1 (D) x 65 (H) inch
Packing Dimension : 4.3 (W) x 10.6 (D) x 80.4 (H) inch

1 inch = 2.54 mm

VMS Mounting Button

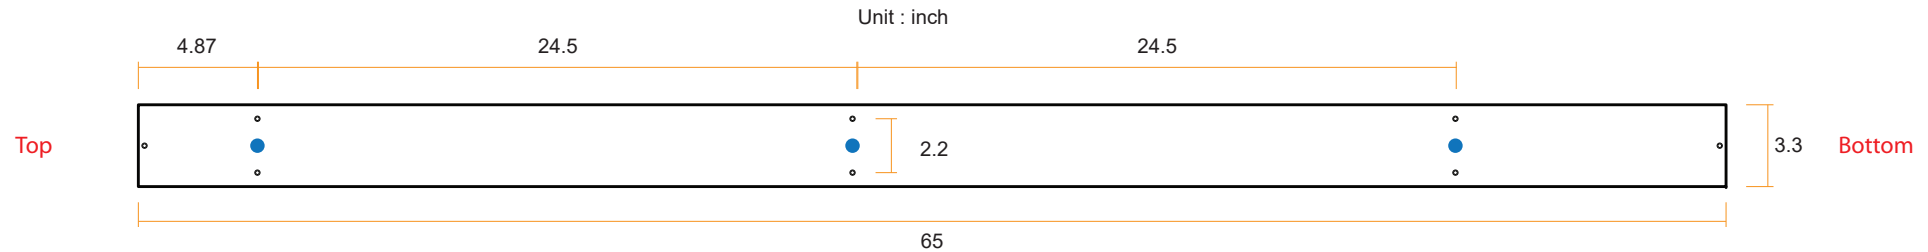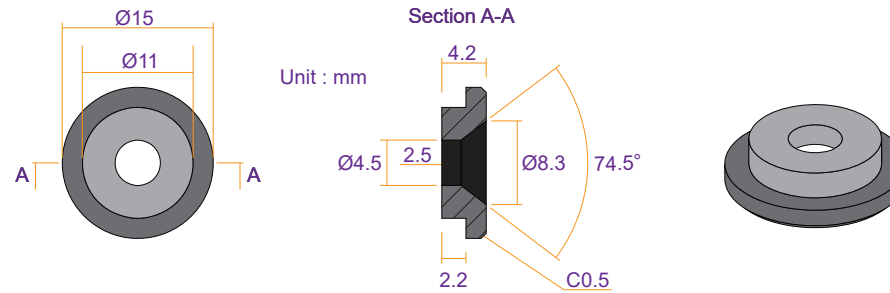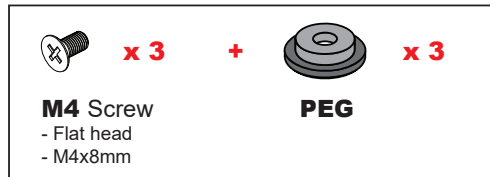

VMB Mounting Bracket

