


# 3-Phase basic PDU specification drawing

400V 16A / 32A PDU : C13 x 30 + C19 x 12

unit : mm

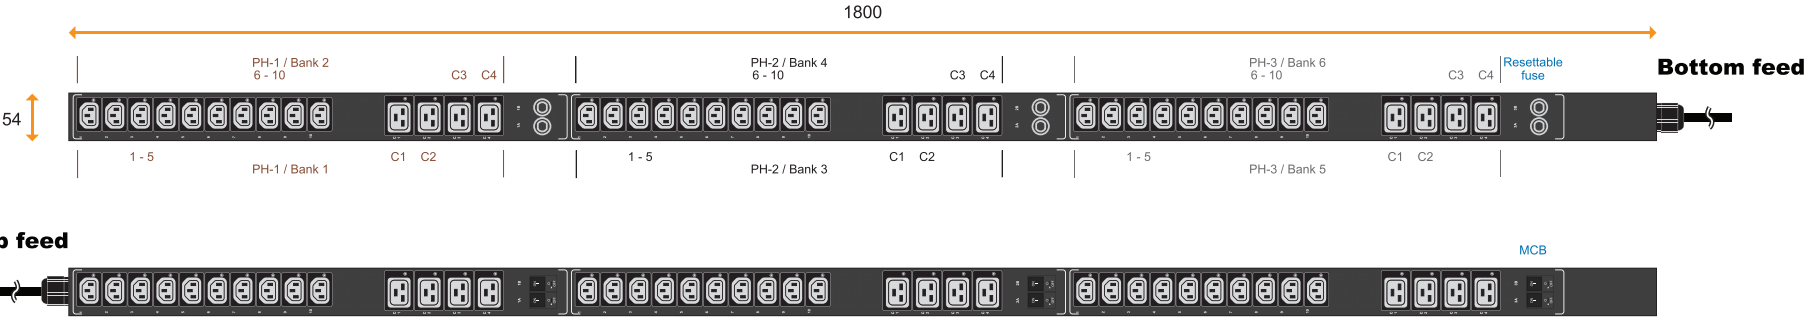

| Circuit Protection | Code      |
|--------------------|-----------|
| Fuse               | <b>F</b>  |
| MCB                | <b>CR</b> |



| 32A model :                                    | Circuit Protection  |
|------------------------------------------------|---------------------|
| VP30C13/12C19-32A/ <b>F</b> _EN/2 <b>B</b> -1  | Resettable Fuse x 6 |
| VP30C13/12C19-32A/ <b>CR</b> _EN/2 <b>T</b> -1 | 1-pole MCB x 6      |

- Input Rating : 32Amp, 400V 3PH  
Cordset : 5-wire 2 meter 4mm sq. H05V V-F cordset  
Protection : 16A resettable fuse or 16A single pole hydraulic MCB x 6  
PH-1 - Bank 1 : Output 16A max., C13 #1-5 + C19 #C1-C2  
Bank 2 : Output 16A max., C13 #6-10 + C19 #C3-C4  
PH-2 - Bank 3 : Output 16A max., C13 #1-5 + C19 #C1-C2  
Bank 4 : Output 16A max., C13 #6-10 + C19 #C3-C4  
PH-3 - Bank 5 : Output 16A max., C13 #1-5 + C19 #C1-C2  
Bank 6 : Output 16A max., C13 #6-10 + C19 #C3-C4  
Weight : Net 8.40 Kg / Gross 9.40 Kg

| PDU Feed | Code     |
|----------|----------|
| Bottom   | <b>B</b> |
| Top      | <b>T</b> |

| Chassis Color | Code     |
|---------------|----------|
| Black         | <b>1</b> |
| White         | <b>2</b> |
| Red           | <b>3</b> |
| Blue          | <b>4</b> |
| Green         | <b>5</b> |
| Orange        | <b>6</b> |
| Yellow        | <b>7</b> |
| Purple        | <b>8</b> |



| 16A model :                                    | Circuit Protection  |
|------------------------------------------------|---------------------|
| VP30C13/12C19-16A/ <b>F</b> _EN/2 <b>B</b> -1  | Resettable Fuse x 3 |
| VP30C13/12C19-16A/ <b>CR</b> _EN/2 <b>T</b> -1 | 1-pole MCB x 3      |


- Input Rating : 16Amp, 400V 3PH  
Cordset : 5-wire 2 meter 1.5mm sq. H05V V-F cordset  
Protection : 16A resettable fuse or 16A single pole hydraulic MCB x 3  
PH-1 : Output 16A max., C13 #1-10 + C19 #C1-C4  
PH-2 : Output 16A max., C13 #1-10 + C19 #C1-C4  
PH-3 : Output 16A max., C13 #1-10 + C19 #C1-C4  
Weight : Net 8.40 Kg / Gross 9.40 Kg

- Operating Temperature : -5 to 60 °C  
Storage Temperature : -25 to 65 °C  
Operating Altitude : 0 to 2,000 m  
Storage Altitude : 0 to 15,000 m  
Humidity : 8 to 95% RH, non-condensing


- EMC Compliance : CE / EMC  
Safety Compliance : CE / LVD & UKCA  
Tested to EN 62368-1:2014 / A11:2017 standard  
Tested to EN 60730-1:2016 / A1:2019 standard  
Environment Compliance : RoHS3 & REACH

Lockable IEC Outlet

- Patented design for InfraPower PDU



C13 Outlet



C19 Outlet


Lockable IEC Cable

- Patented design of InfraPower PDU
- Low cost, easy to lock & secure
- Proprietary for lockable IEC outlet
- Applicable to standard IEC outlet
- 6 colors & 3 lengths available
- Custom color & length on request
- VDE & ENEC approval

C13 - C14

H05VV-F 3G 0.75mm<sup>2</sup>


| Cable Color | 0.5M | 1M | 2M |
|-------------|------|----|----|
| Black       | ✓    | ✓  | ✓  |
| Grey        | ✓    | ✓  | ✓  |
| Red         | ✓    | ✓  | ✓  |
| Blue        | ✓    | ✓  | ✓  |
| Green       | ✓    | ✓  | ✓  |
| Orange      | ✓    | ✓  | ✓  |

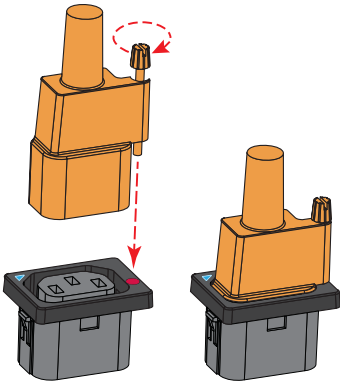

C19 - C20

H05VV-F 3G 1.5mm<sup>2</sup>

| Cable Color | 1M | 2M |
|-------------|----|----|
| Black       | ✓  | ✓  |
| Grey        | ✓  | ✓  |
| Red         | ✓  | ✓  |
| Blue        | ✓  | ✓  |
| Green       | ✓  | ✓  |
| Orange      | ✓  | ✓  |

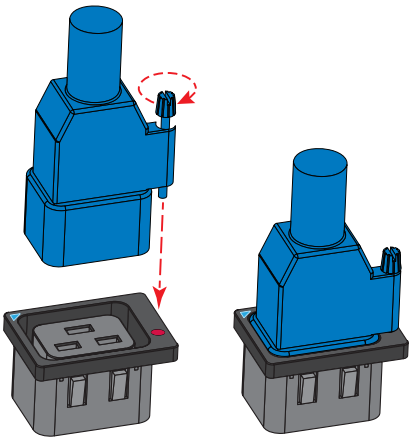


C13 - C14




lockable cable

C19 - C20

- ✓ low cost
- ✓ easy to lock
- ✓ secure

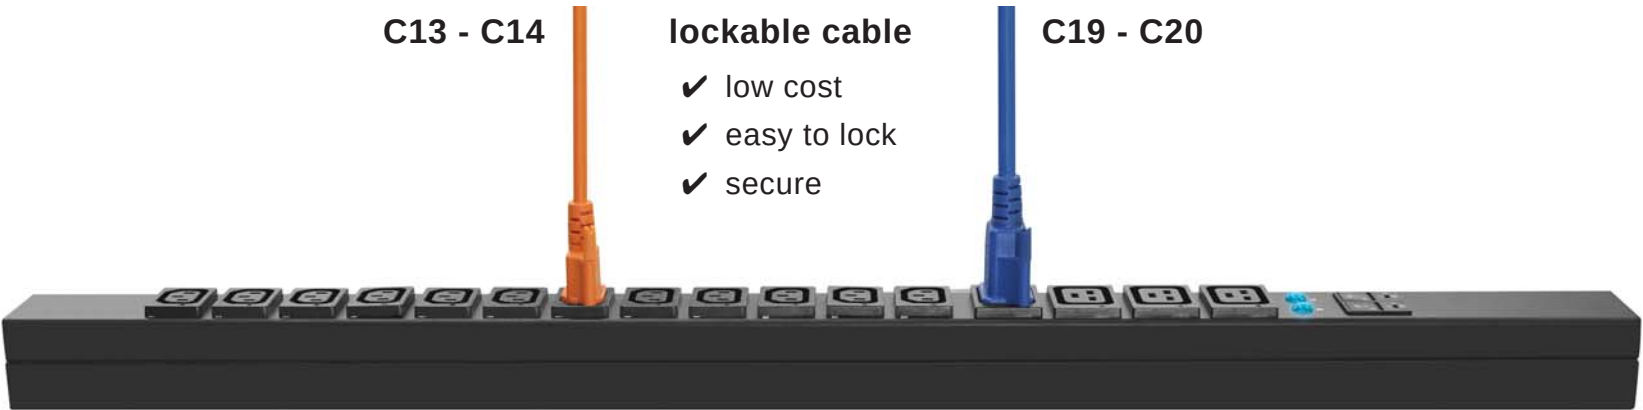

### VMS Mounting Button

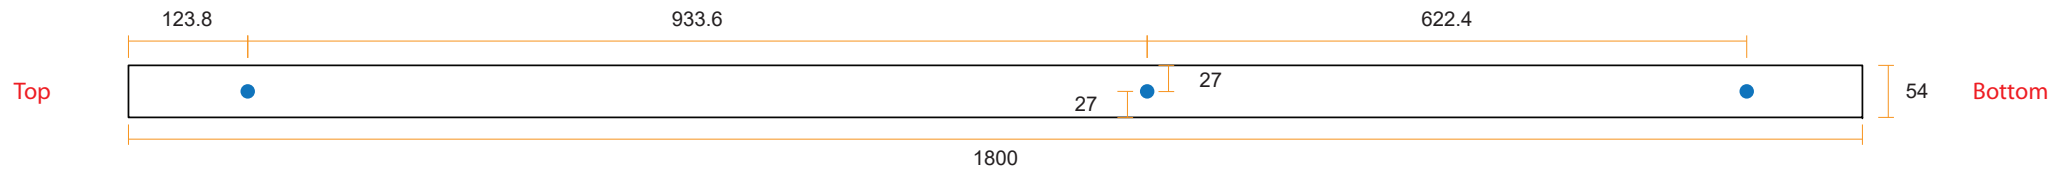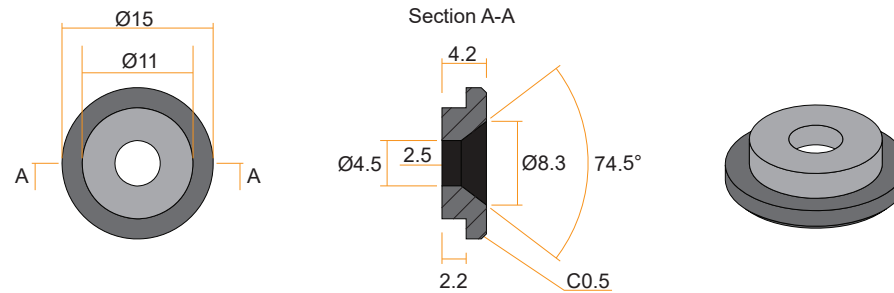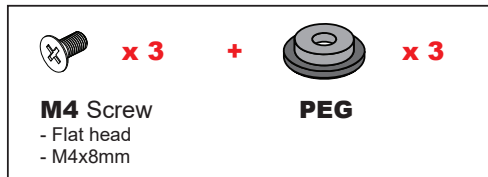

### VMB Mounting Bracket

