


3-Phase basic PDU specification drawing

400V 16A / 32A PDU : C13 x 36 + C19 x 12

unit : mm

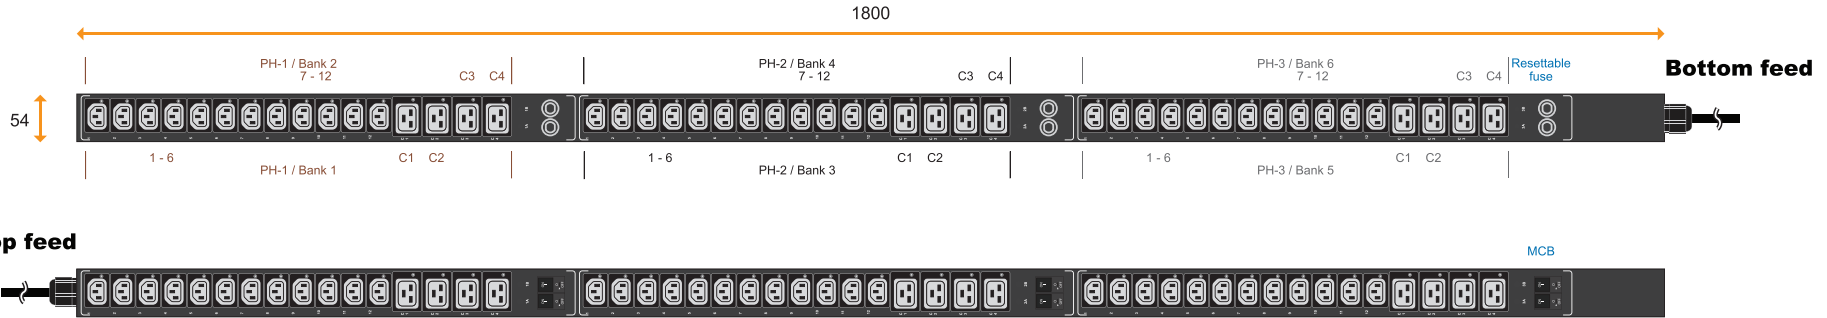

Circuit Protection	Code
Fuse	F
MCB	CR



32A model :	Circuit Protection
VP36C13/12C19-32A/ F _EN/2 B -1	Resettable Fuse x 6
VP36C13/12C19-32A/ CR _EN/2 T -1	1-pole MCB x 6

Input Rating : 32Amp, 400V 3PH
 Cordset : 5-wire 2 meter 4mm sq. H05V V-F cordset
 Protection : 16A resettable fuse or 16A single pole hydraulic MCB x 6
 PH-1 - Bank 1 : Output 16A max., C13 #1-6 + C19 #C1-C2
 Bank 2 : Output 16A max., C13 #7-12 + C19 #C3-C4
 PH-2 - Bank 3 : Output 16A max., C13 #1-6 + C19 #C1-C2
 Bank 4 : Output 16A max., C13 #7-12 + C19 #C3-C4
 PH-3 - Bank 5 : Output 16A max., C13 #1-6 + C19 #C1-C2
 Bank 6 : Output 16A max., C13 #7-12 + C19 #C3-C4
 Weight : Net 8.40 Kg / Gross 9.40 Kg

PDU Feed	Code
Bottom	B
Top	T

Chassis Color	Code
Black	1
White	2
Red	3
Blue	4
Green	5
Orange	6
Yellow	7
Purple	8



16A model :	Circuit Protection
VP36C13/12C19-16A/ F _EN/2 B -1	Resettable Fuse x 3
VP36C13/12C19-16A/ CR _EN/2 T -1	1-pole MCB x 3

Input Rating : 16Amp, 400V 3PH
 Cordset : 5-wire 2 meter 1.5mm sq. H05V V-F cordset
 Protection : 16A resettable fuse or 16A single pole hydraulic MCB x 3
 PH-1 : Output 16A max., C13 #1-12 + C19 #C1-C4
 PH-2 : Output 16A max., C13 #1-12 + C19 #C1-C4
 PH-3 : Output 16A max., C13 #1-12 + C19 #C1-C4
 Weight : Net 8.40 Kg / Gross 9.40 Kg

Standard color: Black

Operating Temperature : -5 to 60 °C
 Storage Temperature : -25 to 65 °C
 Operating Altitude : 0 to 2,000 m
 Storage Altitude : 0 to 15,000 m
 Humidity : 8 to 95% RH, non-condensing

EMC Compliance : CE / EMC
 Safety Compliance : CE / LVD & UKCA
 Tested to EN 62368-1:2014 / A1:2017 standard
 Tested to EN 60730-1:2016 / A1:2019 standard
 Environment Compliance : RoHS3 & REACH

Lockable IEC Outlet

- Patented design for InfraPower PDU



C13 Outlet



C19 Outlet

Lockable IEC Cable

- Patented design of InfraPower PDU
- Low cost, easy to lock & secure
- Proprietary for lockable IEC outlet
- Applicable to standard IEC outlet
- 6 colors & 3 lengths available
- Custom color & length on request
- VDE & ENEC approval

C13 - C14

H05VV-F 3G 0.75mm²

Cable Color	0.5M	1M	2M
Black	✓	✓	✓
Grey	✓	✓	✓
Red	✓	✓	✓
Blue	✓	✓	✓
Green	✓	✓	✓
Orange	✓	✓	✓



C19 - C20

H05VV-F 3G 1.5mm²

Cable Color	1M	2M
Black	✓	✓
Grey	✓	✓
Red	✓	✓
Blue	✓	✓
Green	✓	✓
Orange	✓	✓



C13 - C14

lockable cable

C19 - C20

- ✓ low cost
- ✓ easy to lock
- ✓ secure

