




### Benefits

- ▶ 1U 17" 4K LCD console drawer
- ▶ Dual slide - LCD and keyboard slide independently
- ▶ 3840 x 2160@60Hz native resolution / 16.7M colors ( 8-bit )
- ▶ 2560 x 1440 @60Hz QHD resolution support
- ▶ 1920 x 1080 & 1920 x 1200 resolution support
- ▶ 104-key USB keyboard with touchpad
- ▶ Display port 1.2 video input / USB KB/MS
- ▶ Built-in dual stereo speakers
- ▶ One Man installation design
- ▶ Enhanced aesthetics with molded front handle and two point lock
- ▶ 2-year standard warranty ( upgradable up to 5 years )

### Options

- HDMI 2.0 video input ( **HDMI** )
- 3G / HD / SD-SDI Broadcast-grade input ( **SDI** )
- DC power : 12V / 24V / 48V / 125V / 250V
- SUN Micro keyboard option

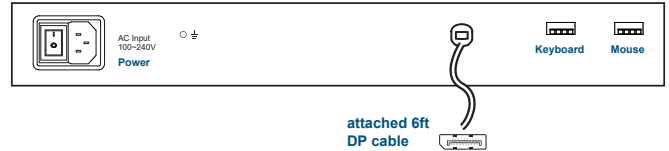

### Product Specifications

#### Console Port

Video input attached 6ft DP cable	Display port 1.2
KB / MS bundled 6ft USB cable x 2	USB type A

#### Video Option

Digital	HDMI	HDMI 2.0 / HDCP 2.2
---------	------	---------------------

#### LCD Panel

Panel size ( diagonal )	17.3"
Native resolution	3840 x 2160@60Hz
Brightness ( cd/m <sup>2</sup> )	400
Contrast ratio ( typ. )	1000 : 1
Colors	16.7 M, 8-bit
Viewing angle ( L/R/U/D )	89/89/89/89
Response time ( ms )	16
Dot pitch ( mm )	0.0995
Display area ( mm )	382.12H x 214.94V
Surface treatment	Anti-glare
Surface hardness	3H
Backlight type	LED
MTBF (hrs)	15,000

#### Power

Input	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption (console / KVM)	Screen on	Max. 21W / Max. 38W
	Power saving mode	Max. 2W / Max. 18W
	Power button off	Max. 1W / Nil

#### Physical

Product ( W x D x H )	Single console	442 x 650 x 44 mm 17.4 x 25.6 x 1.73 inch
	Console w/ KVM	442 x 650 x 44 mm 17.4 x 25.6 x 1.73 inch
Packing ( W x D x H )	Single console /	590 x 815 x 140 mm
	Console w/ KVM	23.2 x 32.1 x 5.5 inch
Net weight	Single console	12 kg / 26.4 lb
	Console w/ KVM	13 kg / 28.6 lb
Gross weight	Single console	18 kg / 39.6 lb
	Console w/ KVM	19 kg / 41.8 lb

\* All dimensions stated are subject to change if options are selected / integrated to base model part codes

#### Environment

Operating temp.	0 to 55°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	10~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration ( 11ms duration )
Vibration	10~300Hz 0.5G RMS random vibration

#### Mounting Distance

Single console drawer / Console w/ KVM drawer	660 ~ 870 mm 26 ~ 34.3 inch
--	--------------------------------


#### Compliance

EMC	FCC & CE
Safety	CE / LVD & UKCA
Environment	REACH & RoHS3 / WEEE

# DK117 models w/ KVM

<b>4K 60Hz KVM</b>	<b>IP</b>	<b>Remote</b>	<b>8-port</b>
	0	0	DK117 - 801K

back

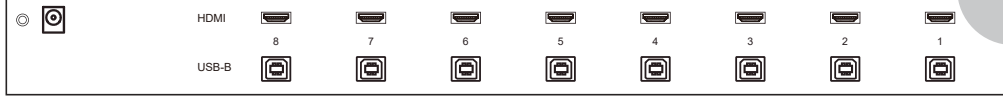


\*\* Resolution related to LCD specification

4K KVM Cable	
<b>CK - 6P (6 ft)</b> DP KVM cable	<b>CK - 6D (6 ft)</b> DVI-D KVM cable
Resolution	16:9 - max. 3840 x 2160
Support ** :	16:10 - max. 1920 x 1200
	4:3 - max. 1600 x 1200

## Standard Keyboard

**Ge** G keyboard with touchpad

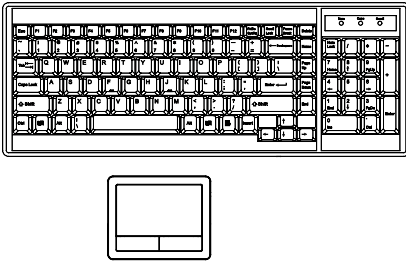

### Supporting layouts

<b>America</b>		U.S.
<b>EMEA</b>		U.K.
		Germany
		France
		Russia
		Spain
		Italy
<b>Asia</b>		Japan
		Korea

## Keyboard Options

\* US layout only

**Se** S keyboard with touchpad

