



Benefits

- ▶ 1U 16.2" LED-backlit LCD console drawer
- ▶ Dual slide - LCD and keyboard slide independently
- ▶ 1920 x 1200 **WUXGA** native resolution / 16.7M colors (8-bit)
- ▶ HDMI 1.4 + VGA video input (speakers excluded)
- ▶ 104-key USB keyboard with touchpad
- ▶ One Man installation design
- ▶ Enhanced aesthetics with molded front handle and two point lock
- ▶ 2-year standard warranty (upgradable up to 5 years)
- ▶ TAA Compliant

Options

- Dual stereo speakers for HDMI (**HS4.4**)
- DVI-D + Audio input & output + Speakers (**DV4.4**)
- 3G / HD / SD-SDI Broadcast-grade input + Speakers (**SDI**)
- DC power : 12V / 24V / 48V / 125V / 250V
- SUN Micro keyboard option

Product Specifications

Console Port

Video input	VGA + DVI-D single link
KB / MS	USB interface
VGA console 6ft cable : CB-6A or DVI-D console 6ft cable : CX-6A	Drawer end : DB-15 + USB type A x 2 Server end : DB-15 + USB type A x 2 Drawer end : DVI-D + USB type A x 2 Server end : DVI-D + USB type A x 2

LED-backlit LCD Panel

Panel size (diagonal)	16.2"
Native resolution	1920 x 1200
Brightness (cd/m ²)	300
Contrast ratio (typ.)	800 : 1
Colors	16.7 M, 8-bit
Viewing angle (L/R/U/D)	89/89/89/89
Response time (ms)	30
Dot pitch (mm)	0.191
Display area (mm)	343.8H x 214.9V
Surface treatment	Anti-glare, Hard-coating
Surface hardness	3H
Backlight type	LED
MTBF (hrs)	20,000

Physical

Product (W x D x H)	Single console	442 x 650 x 44 mm 17.4 x 25.6 x 1.73 inch
	Console w/ KVM	442 x 650 x 44 mm 17.4 x 25.6 x 1.73 inch
Packing (W x D x H)	Single console /	590 x 815 x 140 mm
	Console w/ KVM	23.2 x 32.1 x 5.5 inch
Net weight	Single console	12 kg / 26.4 lb
	Console w/ KVM	13 kg / 28.6 lb
Gross weight	Single console	18 kg / 39.6 lb
	Console w/ KVM	19 kg / 41.8 lb

* All dimensions stated are subject to change if options are selected / integrated to base model part codes

Mounting Distance

Single console drawer / Console w/ KVM drawer	660 ~ 870 mm 26 ~ 34.3 inch
--	--------------------------------

Video Option

Digital	HDMI	HDMI 1.4 / HDCP 1.4
---------	------	---------------------

Audio Option

Input	Connector	3.5mm stereo jack
	Impedance / Power level	30kΩ / 750mV
Output	Connector	3.5mm stereo jack
	Resistance / Power level	30kΩ / 2.8V
Speaker	Dual stereo	2W x 2

Power

Input	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption (console / KVM)	Screen on	Max. 34W / Max. 59W
	Power saving mode	Max. 4W / Max. 29W
	Power button off	Max. 1W / Nil

Environment

Operating temp.	0 to 55°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	10~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration


Compliance

EMC	FCC & CE
Safety	CE / LVD & UKCA
Environment	RoHS3 & REACH

DX117 models w/ KVM

2K KVM	IP	Remote	8-port
	0	0	DX117 - 801D

2K KVM Cable




Resolution: 16:9 - max. 2560 x 1440
Support **: 16:10 - max. 1920 x 1200
4:3 - max. 1600 x 1200

CH - 6D (6 ft) DVI-D KVM cable
CH - 6H (6 ft) HDMI KVM cable

DVI-D KVM	IP	Remote	12-port
	0	0	DX117 - 1201D

DVI-D USB KVM Cable




Resolution: 16:10 - max. 1920 x 1200
Support **: 16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200

CI - 6 (6 ft)
CI - 15 (15 ft)

Cat6 Matrix KVM	IP	Remote	8-port	16-port	32-port
	1	1	-	DX117 - MUIP1613	DX117 - MUIP3213
	2	1	-	DX117 - MUIP1624	DX117 - MUIP3224
	0	1	-	DX117 - MU1602	DX117 - MU3202
	0	2	-	DX117 - MU1603	DX117 - MU3203
	0	3	-	DX117 - MU1604	DX117 - MU3204

Cat6 KVM Dongle




DG - 100C USB-C dongle
DG - 100P DP - USB dongle
DG - 100H HDMI - USB dongle
DG - 100SD DVI - USB dongle
DG - 100S VGA - USB dongle

Resolution: 16:10 - max. 1920 x 1200
Support **: 16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200

Cat6 Combo KVM	IP	Remote	8-port	16-port	32-port
	1	0	DX117 - UIP802	DX117 - UIP1602	DX117 - UIP3202
	0	1	DX117 - U802	DX117 - U1602	DX117 - U3202
	0	0	DX117 - U801	DX117 - U1601	DX117 - U3201

DB-15 Combo KVM	IP	Remote	8-port
	1	0	DX117 - IP802
	0	1	DX117 - 802
	0	0	DX117 - S801


DB-15 VGA USB KVM Cable



Resolution: 16:10 - max. 1920 x 1200
Support **: 16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200

CB - 6 (6 ft)
CB - 10 (10 ft)
CB - 15 (15 ft)


IP Console




Connector : RJ45
User management : 1 x active user, 15-user login
Network protocol : DHCP / BOOTP / DNS
Security : TLS 1.3, AES, LDAP, Active Directory (AD), HTTP(s)
Browser : Chrome, Firefox, Edge, etc.
Resolution : 16:9 - max. 1920 x 1080 / 16:10 - max. 1920 x 1200 / 4:3 - max. 1600 x 1200





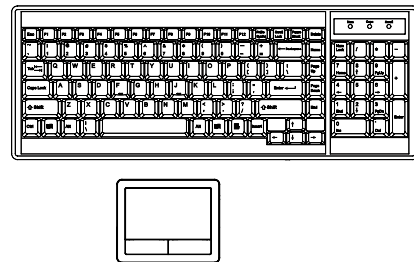

Standard Keyboard



Ge G keyboard with touchpad



Supporting layouts

America  U.S.

EMEA  U.K.  Germany  France  Russia  Spain  Italy

Asia  Japan  Korea

Keyboard Options

* US layout only

Se S keyboard with touchpad

