



Benefits

- ▶ 1U 17" LED-backlit LCD console drawer
- ▶ 1920 x 1080 native resolution / 16.7M colors (8-bit)
- ▶ HDMI + VGA video input (speakers excluded)
- ▶ 104-key USB keyboard with either touchpad or trackball
- ▶ Short depth design of 460mm
- ▶ One Man installation design
- ▶ New enhanced aesthetics with molded front handle
- ▶ 2-year standard warranty (upgradable up to 5 years)

Options

- Dual stereo speakers for HDMI (**HS4.4**)
- DP 1.0 + Speakers (**DP**)
- DVI-D + Audio input & output + Speakers (**DV4.4**)
- Composite + Audio IN + Speakers (**BNC**)
- 3G / HD / SD-SDI Broadcast-grade input + Speakers (**SDI**)
- Front USB hub port for device access (**USB**)
- 2-post rack mounting brackets (**ORB-2.1**)
- DC power : 12V / 24V / 48V / 125V / 250V
- SUN Micro keyboard option
- Touchscreen :
Projected Capacitive 10-pt / Resistive 1-pt

Product Specifications

Console Port	
Video input	VGA + HDMI 1.4
KB / MS	USB interface
VGA console 6ft cable : CB-6A or	Drawer end : DB-15 + USB type A x 2 Server end : DB-15 + USB type A x 2
HDMI console 6ft cable : CX-6B	Drawer end : HDMI + USB type A x 2 Server end : HDMI + USB type A x 2

Video Option		
Digital	DVI-D	DVI-D single link
	Display port	DP 1.0 / HDCP 1.3
Analog	Composite (BNC)	NTSC & PAL

LED-backlit LCD Panel	
Panel size (diagonal)	17.3"
Native resolution	1920 x 1080
Brightness (cd/m ²)	300
Contrast ratio (typ.)	1000 : 1
Colors	16.7 M, 8-bit
Viewing angle (L/R/U/D)	85/85/85/85
Response time (ms)	25
Dot pitch (mm)	0.1989
Display area (mm)	381.888H x 214.812V
Surface treatment	Anti-glare, Hard-coating
Surface hardness	3H
Backlight type	LED
MTBF (hrs)	15,000

Audio Option		
Input	Connector	3.5mm stereo jack
	Impedance / Power level	30kΩ / 750mV
Output	Connector	3.5mm stereo jack
	Resistance / Power level	30kΩ / 2.8V
Speaker	Dual stereo	2W x 2

Power		
Input	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption (console / KVM)	Screen on	Max. 14W / Max. 45W
	Power saving mode	Max. 2W / Max. 34W
	Power button off	Max. 1W / Nil

Physical		
Product (W x D x H)	Single console	442 x 460 x 44 mm 17.4 x 18.1 x 1.73 inch
	Console w/ KVM	442 x 580 x 44 mm 17.4 x 22.8 x 1.73 inch
Packing (W x D x H)	Single console /	590 x 808 x 140 mm
	Console w/ KVM	23.2 x 31.8 x 5.5 inch
Net weight	Single console	10.8 kg / 23.8 lb
	Console w/ KVM	11.6 kg / 25.5 lb
Gross weight	Single console	15.8 kg / 34.8 lb
	Console w/ KVM	17.5 kg / 38.5 lb

* All dimensions stated are subject to change if options are selected / integrated to base model part codes

Environment	
Operating temp.	0 to 55°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	10~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration

Mounting Distance	
Single console drawer	470 ~ 700 mm 18.5 ~ 27.6 inch
Console w/ KVM drawer	470 ~ 800 mm 18.5 ~ 31.5 inch

Compliance	
EMC	FCC, CE & CCC
Safety	c UL us, CE / LVD, UKCA & CCC
Environment	RoHS3 & REACH / WEEE

F117 models w/ KVM

** Resolution related to LED-backlit LCD specification

2K KVM	IP	Remote	8-port
	0	0	F117 - 801D

2K KVM Cable



CH - 6D (6 ft)
DVI-D KVM cable




CH - 6H (6 ft)
HDMI KVM cable

Resolution: 16:9 - max. 2560 x 1440
Support **: 16:10 - max. 1920 x 1200
4:3 - max. 1600 x 1200

DVI-D KVM	IP	Remote	12-port
	0	0	F117 - 1201D

DVI-D USB KVM Cable


Resolution: 16:10 - max. 1920 x 1200
Support **: 16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200




CI - 6 (6 ft)
CI - 15 (15 ft)

Cat6 Matrix KVM	IP	Remote	8-port	16-port	32-port
	1	1	-	F117 - MUIP1613	F117 - MUIP3213
	2	1	-	F117 - MUIP1624	F117 - MUIP3224
	0	1	-	F117 - MU1602	F117 - MU3202
	0	2	-	F117 - MU1603	F117 - MU3203
	0	3	-	F117 - MU1604	F117 - MU3204


Cat6 KVM Dongle




DG - 100C
USB-C dongle




DG - 100P
DP - USB dongle



DG - 100H
HDMI - USB dongle



DG - 100SD
DVI - USB dongle




DG - 100S
VGA - USB dongle

Resolution: 16:10 - max. 1920 x 1200
Support **: 16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200


Cat6 Combo KVM	IP	Remote	8-port	16-port	32-port
	1	0	F117 - UIP802	F117 - UIP1602	F117 - UIP3202
	0	1	F117 - U802	F117 - U1602	F117 - U3202
	0	0	F117 - U801	F117 - U1601	F117 - U3201

DB-15 Combo KVM	IP	Remote	8-port	16-port
	1	0	F117 - IP802	F117 - IP1602
	0	1	F117 - 802	F117 - 1602
	0	0	F117 - S801	F117 - S1601


DB-15 VGA USB KVM Cable



CB - 6 (6 ft)



CB - 10 (10 ft)





CB - 15 (15 ft)


Resolution: 16:10 - max. 1920 x 1200
Support **: 16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200

DB-15 USB Hub KVM	IP	Remote	8-port
	1	0	F117 - IP802H
	0	1	F117 - 802H
	0	0	F117 - 801H

IP Console










High Performance KVM Access Over IP

Connector :	RJ45
User management :	1 x active user, 15-user login
Network protocol :	DHCP / BOOTP / DNS
Security :	TLS 1.3, AES, LDAP, Active Directory (AD), HTTP(s)
Browser :	Chrome, Firefox, Edge, etc.
Resolution :	16:9 - max. 1920 x 1080 / 16:10 - max. 1920 x 1200 / 4:3 - max. 1600 x 1200







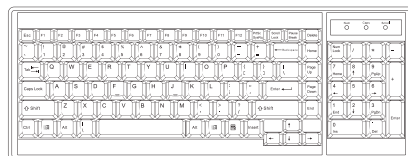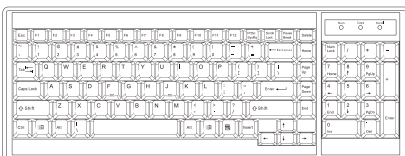


Standard Keyboard

Ge G keyboard with touchpad

Gb G keyboard with trackball



Supporting layouts

America	 U.S.
EMEA	<div style="text-align: center;"> U.K.</div> <div style="text-align: center;"> Germany</div> <div style="text-align: center;"> France</div> <div style="text-align: center;"> Russia</div> <div style="text-align: center;"> Spain</div> <div style="text-align: center;"> Italy</div>
Asia	<div style="text-align: center;"> Japan</div> <div style="text-align: center;"> Korea</div>

Keyboard Options

* US layout only

Se S keyboard with touchpad

Sb S keyboard with trackball

