



Benefits

- ▶ 1U 20" LCD console drawer
- ▶ 1600 x 1200 native resolution / 16.7M colors
- ▶ 104-key USB keyboard with touchpad
- ▶ One Man installation design
- ▶ Enhanced aesthetics with molded front handle and two point lock
- ▶ 2-year standard warranty (upgradable up to 5 years)
- ▶ TAA Compliant

Options

- HDMI 1.3 + DVI-D + Speakers (**AV3.0**)
- S-Video + Composite (**BNC**)
- 3G / HD / SD-SDI Broadcast-grade input + Speakers (**SDI**)
- DC power : 12V / 24V / 48V / 125V / 250V
- SUN Micro keyboard option

Product Specifications

Console Port

Video input	VGA
KB / MS	USB interface
VGA console 6ft cable : CB-6A	Drawer end : DB-15 + USB type A x 2 Server end : DB-15 + USB type A x 2

Video Option

Digital	DVI	DVI-D single link
	HDMI	HDMI 1.3 / HDCP 1.1
Analog	S-Video (4-pin)	NTSC & PAL
	Composite (BNC)	NTSC & PAL

LCD Panel

Panel size (diagonal)	20.1"
Native resolution	1600 x 1200
Brightness (cd/m ²)	300
Contrast ratio (typ.)	800 : 1
Colors	16.7 M
Viewing angle (L/R/U/D)	89/89/89/89
Response time (ms)	16
Dot pitch (mm)	0.255
Display area (mm)	408H x 306V
Surface treatment	Anti-glare, Hard-coating
Surface hardness	3H
Backlight type	CCFL
MTBF (hrs)	45,000

Power

Input	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption (console / KVM)	Screen on	Max. 45W / Max. 78W
	Power saving mode	Max. 2W / Max. 34W
	Power button off	Max. 1W / Nil

Physical

Product (W x D x H)	Single console	442 x 650 x 44 mm 17.4 x 25.6 x 1.73 inch
	Console w/ KVM	442 x 650 x 44 mm 17.4 x 25.6 x 1.73 inch
Packing (W x D x H)	Single console /	590 x 815 x 140 mm
	Console w/ KVM	23.2 x 32.1 x 5.5 inch
Net weight	Single console	14.5 kg / 31.9 lb
	Console w/ KVM	15.5 kg / 34.1 lb
Gross weight	Single console	22 kg / 48.4 lb
	Console w/ KVM	23.4 kg / 51.5 lb

* All dimensions stated are subject to change if options are selected / integrated to base model part codes

Environment

Operating temp.	0 to 55°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	10~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration

Mounting Distance

Single console drawer / Console w/ KVM drawer	660 ~ 870 mm 26 ~ 34.3 inch
--	--------------------------------


Compliance

EMC	FCC & CE
Safety	CE / LVD & UKCA
Environment	REACH & RoHS3 / WEEE


L120 models w/ KVM

HDMI KVM	IP	Remote	8-port
	0	0	L120 - 801K


HDMI KVM Cable



CK - 6H (6 ft)
4K HDMI - HDMI cable



CK - 6P (6 ft)
4K HDMI - DP cable




CH - 6D (6 ft)
2K HDMI - DVI-D cable

DVI-D KVM	IP	Remote	12-port
	0	0	L120 - 1201D

DVI-D USB KVM Cable


Resolution : 16:10 - max. 1920 x 1200
Support **: 16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200




CI - 6 (6 ft)
CI - 15 (15 ft)

Cat6 Matrix KVM	IP	Remote	8-port	16-port	32-port
	1	1	-	L120 - MUIP1613	L120 - MUIP3213
	2	1	-	L120 - MUIP1624	L120 - MUIP3224
	0	1	-	L120 - MU1602	L120 - MU3202
	0	2	-	L120 - MU1603	L120 - MU3203
	0	3	-	L120 - MU1604	L120 - MU3204


Cat6 KVM Dongle




DG - 100C
USB-C dongle




DG - 100P
DP - USB dongle



DG - 100H
HDMI - USB dongle



DG - 100SD
DVI - USB dongle




DG - 100S
VGA - USB dongle

Resolution : 16:10 - max. 1920 x 1200
Support **: 16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200


Cat6 Combo KVM	IP	Remote	8-port	16-port	32-port
	1	0	L120 - UIP802	L120 - UIP1602	L120 - UIP3202
	0	1	L120 - U802	L120 - U1602	L120 - U3202
	0	0	L120 - U801	L120 - U1601	L120 - U3201

DB-15 Combo KVM	IP	Remote	8-port	16-port
	1	0	L120 - IP802	L120 - IP1602
	0	1	L120 - 802	L120 - 1602
	0	0	L120 - S801	L120 - S1601


DB-15 VGA USB KVM Cable



CB - 6 (6 ft)




CB - 10 (10 ft)





CB - 15 (15 ft)

Resolution : 16:10 - max. 1920 x 1200
Support **: 16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200

IP Console








High Performance KVM Access Over IP







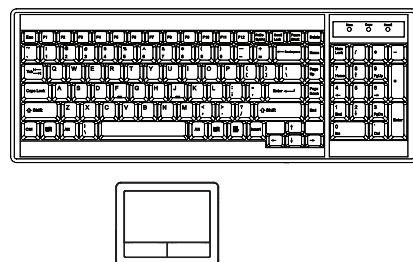

Connector :	RJ45
User management :	1 x active user, 15-user login
Network protocol :	DHCP / BOOTP / DNS
Security :	TLS 1.3, AES, LDAP, Active Directory (AD), HTTP(s)
Browser :	Chrome, Firefox, Edge, etc.
Resolution :	16:9 - max. 1920 x 1080 / 16:10 - max. 1920 x 1200 / 4:3 - max. 1600 x 1200

Standard Keyboard

Ge G keyboard with touchpad



Supporting layouts

America	 U.S.
EMEA	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  U.K. </div> <div style="text-align: center;">  Germany </div> <div style="text-align: center;">  France </div> <div style="text-align: center;">  Spain </div> <div style="text-align: center;">  Italy </div> </div>
Asia	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  Japan </div> <div style="text-align: center;">  Korea </div> </div>