

RP-F921QD-1080

9U 21" FHD Quad Display Panel





Benefits

- ▶ 9U 21" LED-backlit LCD Quad display panel
- ▶ 1920 x 1080 native resolution / 16.7M colors
- ▶ DVI-D + VGA + Quad Display (HDMI 1.3 x 4) video input
- ▶ 2-year standard warranty (upgradable up to 5 years)
- ▶ TAA Compliant

Options

- DP 1.0 video input
- DC power : 12V / 24V / 48V / 125V / 250V

RP-F921QD-1080

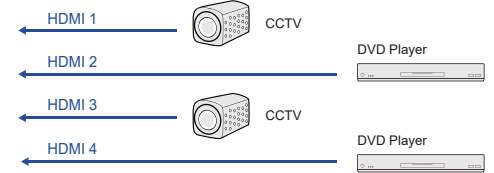

Product Specifications

Video	
Video input	QD (HDMI 1.3 x 4) + DVI-D single link + VGA

Video Option	
Digital	Display port
	DP 1.0 / HDCP 1.3

LED-backlit LCD Panel	
Panel size (diagonal)	21.5"
Native resolution	1920 x 1080
Brightness (cd/m²)	250
Contrast ratio (typ.)	1000 : 1
Colors	16.7 M
Viewing angle (L/R/U/D)	85/85/80/80
Response time (ms)	5
Dot pitch (mm)	0.248
Display area (mm)	476.64H x 268.11V
Surface treatment	Haze 25%, Hard-coating
Surface hardness	3H
Backlight type	LED
MTBF (hrs)	30,000

Power		
Input	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption	Screen on	Max. 28W
	Power saving mode	Max. 2W
	Power button off	Max. 1W

Environment	
Operating temp.	0 to 55°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	10~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration

Mounting	
Rackmount	9U
VESA mount	100*100 mm

Compliance	
EMC	FCC & CE
Safety	CE / LVD & UKCA
Environment	REACH & RoHS3 / WEEE

Physical		
Dimensions (W x D x H)	Product	502 x 64 x 399 mm 19.8 x 2.5 x 15.7 inch
	Packing	585 x 124 x 557 mm 23 x 4.9 x 21.9 inch
Weight	Net	9.5 kg / 20.9 lb
	Gross	12.5 kg / 27.5 lb

* All dimensions stated are subject to change if options are selected / integrated to base model part codes

Diagrams (mm)

** Dimensions to be confirmed

