


Drawing & Specification

18 Nov 2024 Version : V1

208V 16A
C13 x 2 / 4



Unit : inch

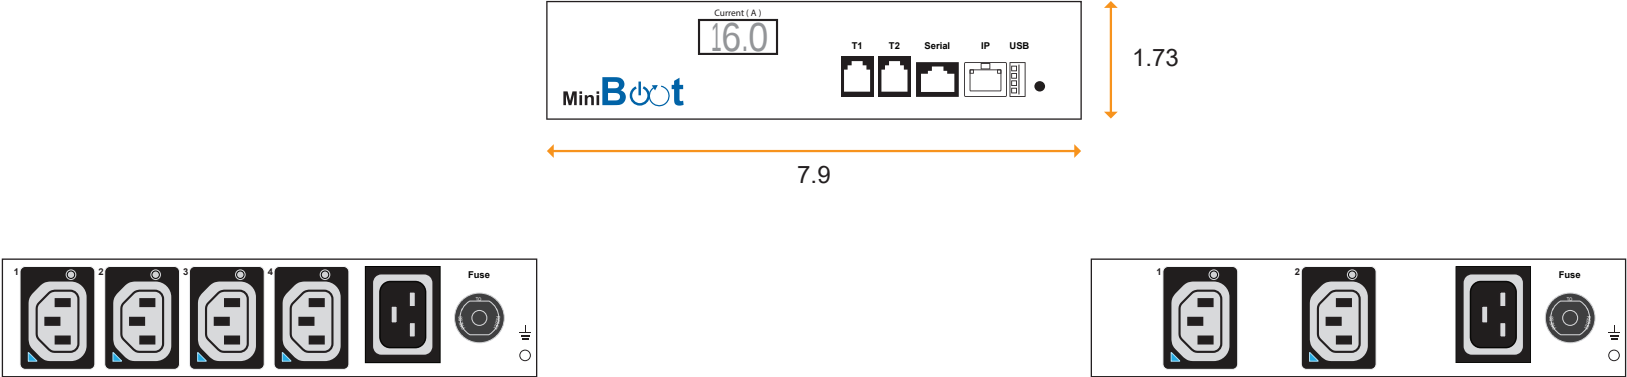

208V model	Fuse x 1	Switched outlet	Inlet
MiniBoot-4C13-16A	16A	C13 x 4	16 Amp IEC320 C20

208V model	Fuse x 1	Switched outlet	Inlet
MiniBoot-2C13-16A	16A	C13 x 2	16 Amp IEC320 C20



Specification

Operating Temperature : -5 to 60 °C
Storage Temperature : -25 to 65 °C
Operating Altitude : 0 to 2,000 m
Storage Altitude : 0 to 15,000 m
Humidity (non-condensing) : 8 to 95% RH

Chassis Material / Color : Steel / White
Product Dimension : 7.9W x 5.7D x 1.73H (inch)
Packing Dimension : 11.8W x 7.7D x 3.2H (inch)
Net / Gross Weight : 2 lbs / 3.3 lbs

Meter Features

Local Display : 3-digit LED ammeter for input current
Measurement : Current (Amp)
Alarm threshold support : Overload, temp, humidity & auto-ping
Remote management : Telnet or SNMP v2 / v3
Outlet : ON / OFF / Reboot over network
IP security : LDAPv3 / LDAPS, AD, RADIUS, local credential database
Protocol : HTTP(S), SSH Command Line Interface, Telnet, SMTP, IPv6/IPv4
1 x IP port : 10 / 100 / 1000 Base T, RJ45
1 x serial port : Support CLI command access
2 x sensor port : Support Temp. / Temp. + Humid. / Smoke sensor / Door switch
1 x USB port : Support Wifi Kit (option)

EMC Certificates

FCC : FCC 47 CFR Part 15 Subpart B, ICES-003 Issue 7

Safety Certificates
CB : IEC 62368-1:2014
UL-US : UL 62368-1, 2nd Ed., Issue Date: 2014-12-01
UL-CA : CSA C22.2 No. 62368-1-14, 2nd Ed., Issue Date: 2014-12-01

Environment : RoHS, Reach & WEEE



Design. Manufacturing. Global Services.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Copyright 2025 Austin Hughes Electronics Ltd. All rights reserved.