


Drawing & Specification

18 Nov 2024 Version : V1

230V 10A / 13A / 16A
C13 x 2 / 4



Unit : mm

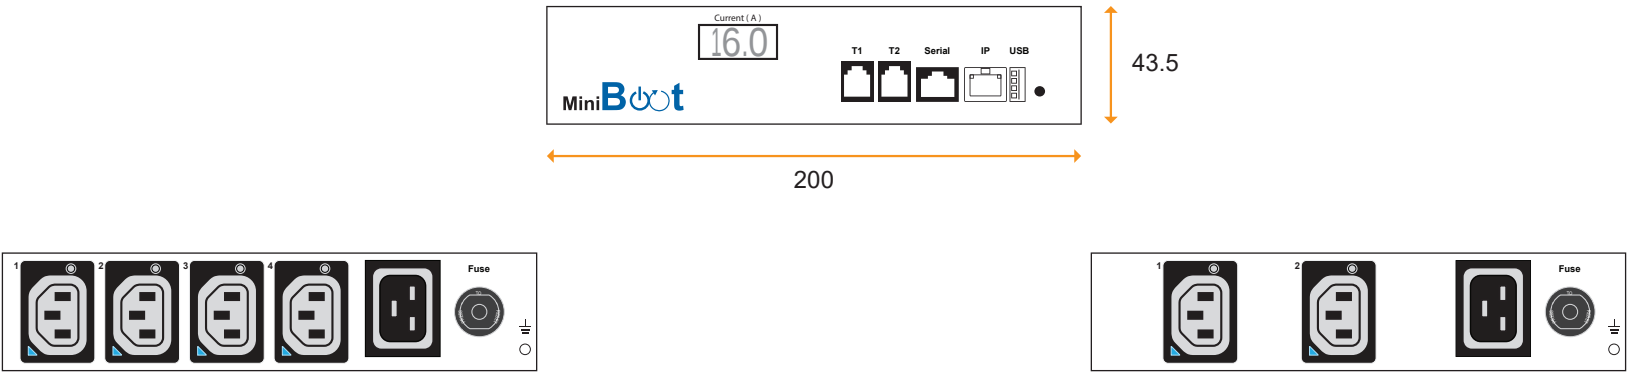

230V model	Fuse x 1	Switched outlet	Inlet
MiniBoot-4C13-16A	16A	C13 x 4	 16 Amp IEC320 C20
MiniBoot-4C13-13A	13A		
MiniBoot-4C13-10A	10A		

230V model	Fuse x 1	Switched outlet	Inlet
MiniBoot-2C13-16A	16A	C13 x 2	 16 Amp IEC320 C20
MiniBoot-2C13-13A	13A		
MiniBoot-2C13-10A	10A		



Specification

Operating Temperature : -5 to 60 °C
Storage Temperature : -25 to 65 °C
Operating Altitude : 0 to 2,000 m
Storage Altitude : 0 to 15,000 m
Humidity (non-condensing) : 8 to 95% RH

Chassis Material / Color : Steel / White
Product Dimension : 200W x 145D x 43.5H (mm)
Packing Dimension : 300W x 196D x 81H (mm)
Net / Gross Weight : 0.9 kg / 1.5 kg

Meter Features

Local Display : 3-digit LED ammeter for input current
Measurement : Current (Amp)
Alarm threshold support : Overload, temp, humidity & auto-ping
Remote management : Telnet or SNMP v2 / v3
Outlet : ON / OFF / Reboot over network
IP security : LDAPv3 / LDAPS, AD, RADIUS, local credential database
Protocol : HTTP(S), SSH Command Line Interface, Telnet, SMTP, IPv6/IPv4
1 x IP port : 10 / 100 / 1000 Base T, RJ45
1 x serial port : Support CLI command access
2 x sensor port : Support Temp. / Temp. + Humid. / Smoke sensor / Door switch
1 x USB port : Support Wifi Kit (option)

EMC Certificates

CE / EMC : EN55032:2015/A11:2020
EN IEC 61000-3-2:2019/A1:2021
EN61000-3-3:2013/A2:2021
EN55035:2017/A11:2020

Safety Certificates
CE/ LVD : EN 62368-1:2014, EN 62368-1:2014/A11:2017
CB : IEC 62368-1:2014
UKCA : BS EN 62368-1:2014+A11: 2017
UL-US : UL 62368-1, 2nd Ed., Issue Date: 2014-12-01
UL-CA : CSA C22.2 No. 62368-1-14, 2nd Ed., Issue Date: 2014-12-01

Environment : RoHS, Reach & WEEE