



Front view



Top view

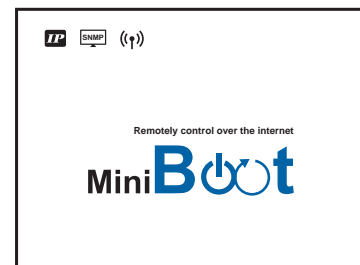

Rear view



<b>15A model :</b>	<b>Circuit Protection</b>
MiniBoot-2US-15A	16A resettable fuse x 1

Input Rating : 15Amp, 110V  
 Outlet : US #1-2  
 Inlet : 16A IEC320 C20  
 Protection : 16A resettable fuse x 1  
 Circuit : Output 12A max.



**Meter Features ( MiniBoot PDU )**

Local Display : 3-digit LED ammeter for input current  
 Measurement : Current ( Amp )  
 Alarm threshold support : Overload, temp, humidity & auto-ping  
 Remote management : Telnet or SNMP v2 / v3  
 Outlet : ON / OFF / Reboot over network  
 IP security : LDAPv3 / LDAPS, AD, RADIUS, local credential database  
 Protocol : HTTP(S), SSH Command Line Interface, Telnet, SMTP, IPv6/IPv4  
 1 x IP port : 10 / 100 / 1000 Base T, RJ45  
 1 x serial port : for CLI command access  
 2 x sensor port : Support Temp. / Temp. + Humid. / Smoke sensor / Door switch  
 1 x USB port : for Wifi Kit ( option )

Chassis Material : Steel  
 Chassis Color : White  
 Net weight : 2 lbs  
 Gross weight : 3.3 lbs  
 Product Dimension : 7.1 (W) x 5.5 (D) x 1.75 (H) inch  
 Packing dimension : 11.8 (W) x 7.7 (D) x 3.2(H) inch

EMC Compliance : FCC Part 15 Subpart B  
 Safety Compliance : UL 62368-1:2014  
 Environment Compliance : RoHS3, Reach & WEEE  
 Operating Temperature : -5 to 60 °C  
 Storage Temperature : -25 to 65 °C  
 Operating Altitude : 0 to 2,000 m  
 Storage Altitude : 0 to 15,000 m  
 Humidity : 8 to 95% RH, non-condensing