




Front view

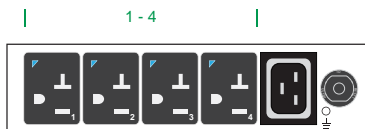

Top view

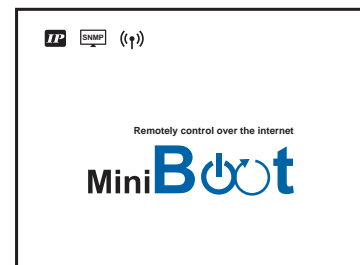

Rear view



<b>15A model :</b>	<b>Circuit Protection</b>
MiniBoot-4US-15A	16A resettable fuse x 1

Input Rating : 15Amp, 110V  
 Outlet : US #1-4  
 Inlet : 16A IEC320 C20  
 Protection : 16A resettable fuse x 1  
 Circuit : Output 12A max.



**Meter Features ( MiniBoot PDU )**

- Local Display : 3-digit LED ammeter for input current
- Measurement : Current ( Amp )
- Alarm threshold support : Overload, temp, humidity & auto-ping
- Remote management : Telnet or SNMP v2 / v3
- Outlet : ON / OFF / Reboot over network
- IP security : LDAPv3 / LDAPS, AD, RADIUS, local credential database
- Protocol : HTTP(S), SSH Command Line Interface, Telnet, SMTP, IPv6/IPv4
- 1 x IP port : 10 / 100 / 1000 Base T, RJ45
- 1 x serial port : for CLI command access
- 2 x sensor port : Support Temp. / Temp. + Humid. / Smoke sensor / Door switch
- 1 x USB port : for Wifi Kit ( option )

- Chassis Material : Steel
- Chassis Color : White
- Net weight : 2 lbs
- Gross weight : 3.3 lbs
- Product Dimension : 7.1 (W) x 5.5 (D) x 1.75 (H) inch
- Packing dimension : 11.8 (W) x 7.7 (D) x 3.2(H) inch

- EMC Compliance : FCC Part 15 Subpart B
- Safety Compliance : UL 62368-1:2014
- Environment Compliance : RoHS3, Reach & WEEE
- Operating Temperature : -5 to 60 °C
- Storage Temperature : -25 to 65 °C
- Operating Altitude : 0 to 2,000 m
- Storage Altitude : 0 to 15,000 m
- Humidity : 8 to 95% RH, non-condensing