



3-Phase 208V 20A / 30A / 50A / 60A dual feed in-line meter

unit : inch

Front view

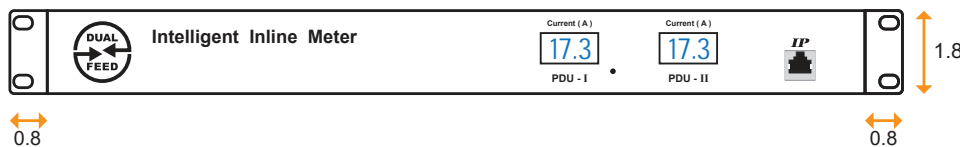

Rear view

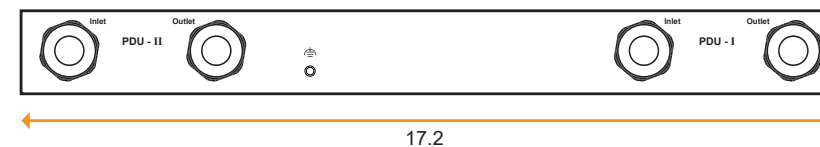

Amp	Outlet	Model	Inlet
60A	IEC 60309 3P+E 9h Blue Female (IP67)	DPW-60A_EN	IEC 60309 3P+E 9h Blue Male (IP67)
	Hubbell CS8364 Female	DPW-50A_CS8365C	Hubbell CS8365 Male
30A	NEMA L21-30C Female	DPW-30A_L2130	NEMA L21-30P Male
	NEMA L15-30C Female	DPW-30A_L1530	NEMA L15-30P Male
20A	NEMA L21-20C Female	DPW-20A_L2120	NEMA L21-20P Male
	NEMA L15-20C Female	DPW-20A_L1520	NEMA L15-20P Male

- Input Rating : 60Amp, 208V
- Inlet cordset : 4-wire 4.9 feet 10.0mm sq. SOOW 6AWG/4C 60A IEC 60309 3P+E 9h Blue male plug x 2
- Outlet cordset : 4-wire 4.9 feet 10.0mm sq. SOOW 6AWG/4C 60A IEC 60309 3P+E 9h Blue female connector x 2

- Input Rating : 50Amp, 208V
- Inlet cordset : 4-wire 4.9 feet 10.0mm sq. SOOW 6AWG/4C 50A Hubbell CS8365 male plug x 2
- Outlet cordset : 4-wire 4.9 feet 10.0mm sq. SOOW 6AWG/4C 50A Hubbell CS8364 female connector x 2

- Input Rating : 30Amp, 208V
- Inlet cordset : 5-wire 4.9 feet SJT 10AWG 30A NEMA L21-30P male plug x 2
- Outlet cordset : 5-wire 4.9 feet SJT 10AWG 30A NEMA L21-30C female connector x 2

- Input Rating : 30Amp, 208V
- Inlet cordset : 4-wire 4.9 feet SJT 10AWG 30A NEMA L15-30P male plug x 2
- Outlet cordset : 4-wire 4.9 feet SJT 10AWG 30A NEMA L15-30C female connector x 2

- Input Rating : 20Amp, 208V
- Inlet cordset : 5-wire 4.9 feet SJT 12AWG 20A NEMA L21-20P male plug x 2
- Outlet cordset : 5-wire 4.9 feet SJT 12AWG 20A NEMA L21-20C female connector x 2

- Input Rating : 20Amp, 208V
- Inlet cordset : 4-wire 4.9 feet SJT 12AWG 20A NEMA L15-20P male plug x 2
- Outlet cordset : 4-wire 4.9 feet SJT 12AWG 20A NEMA L15-20C female connector x 2

Operating Temperature : -5 to 60 °C
 Storage Temperature : -25 to 65 °C
 Operating Altitude : 0 to 2,000 m
 Storage Altitude : 0 to 15,000 m
 Humidity : 8 to 95% RH, non-condensing

Meter Features
 Local Display : 3-digit LED ammeter measuring input load current
 Measurement : Voltage (V), Current (A), energy (kWh) & power factor
 Accuracy : ±1% Billing-grade
 IP Access : via built-in IP dongle for network access
 SNMP : V2 / V3 via IP dongle

EMC Compliance : FCC Part 15 Subpart B
 Safety Compliance : Tested to UL standard
 Environment Compliance : RoHS3 & REACH

Product Dimension : 17.2 (W) x 7.0 (D) x 1.8 (H) in.
 Packing dimension : 20.7 (W) x 15.0 (D) x 3.1 (H) in.
 Material : Steel
 Color : Black
 Weight : Net 11.7 Lb / Gross 12.8 Lb

AUSTIN HUGHES
 Design. Manufacturing. Global Services.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Copyright 2021 Austin Hughes Electronics Ltd. All rights reserved.