


Specification drawing

1-Phase 110V 15A / 20A / 30A in-line meter

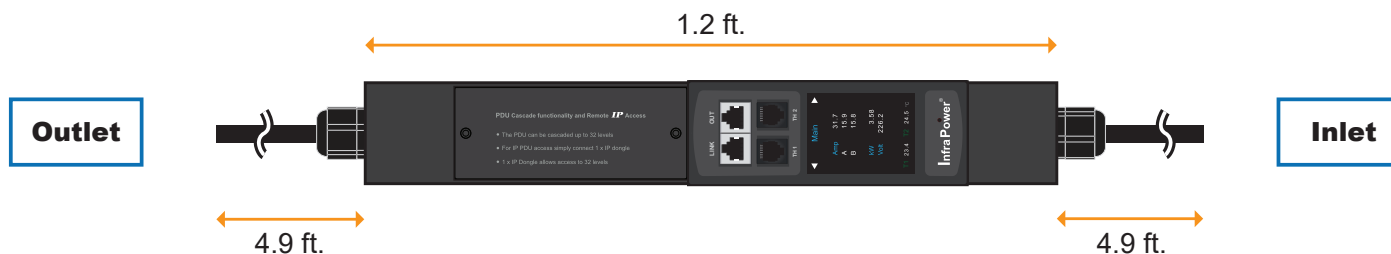

Amp	Outlet	Model	Inlet
30A	NEMA L5-30R Female	EW-30A_L530	NEMA L5-30P Male
	NEMA 5-30R Female	EW-30A_530	NEMA 5-30P Male
20A	NEMA L5-20R Female	EW-20A_L520	NEMA L5-20P Male
	NEMA 5-20R Female	EW-20A_520	NEMA 5-20P Male
15A	NEMA 5-15R Female	EW-15A_515	NEMA 5-15P Male

Input Rating : 30Amp, 110V
 Inlet cordset : 4.9 feet UL SJT 10 AWG 30A NEMA L5-30P male plug x 1
 Outlet cordset : 4.9 feet UL SJT 10 AWG 30A NEMA L5-30R female connector x 1

Input Rating : 30Amp, 110V
 Inlet cordset : 4.9 feet UL SJT 10 AWG 30A NEMA 5-30P male plug x 1
 Outlet cordset : 4.9 feet UL SJT 10 AWG 30A NEMA 5-30R female connector x 1

Input Rating : 20Amp, 110V
 Inlet cordset : 4.9 feet UL SJT 12 AWG 20A NEMA L5-20P male plug x 1
 Outlet cordset : 4.9 feet UL SJT 12 AWG 20A NEMA L5-20R female connector x 1

Input Rating : 20Amp, 110V
 Inlet cordset : 4.9 feet UL SJT 12 AWG 20A NEMA 5-20P male plug x 1
 Outlet cordset : 4.9 feet UL SJT 12 AWG 20A NEMA 5-20R female connector x 1

Input Rating : 15Amp, 110V
 Inlet cordset : 4.9 feet UL SJT 14 AWG 15A NEMA 5-15P male plug x 1
 Outlet cordset : 4.9 feet UL SJT 14 AWG 15A NEMA 5-15R female connector x 1

Operating Temperature : -5 to 60 °C
 Storage Temperature : -25 to 65 °C
 Operating Altitude : 0 to 2,000 m
 Storage Altitude : 0 to 15,000 m
 Humidity : 8 to 95% RH, non-condensing

Meter Features
 Local Display : Field replaceable 2.8" color LCD with touchscreen
 Bank Measurement : Voltage (V), Current (A), energy (kWh) & power factor
 Accuracy : ±1% Billing-grade
 IP Access : via IP dongle, one IP Access up to 32 PDU Levels
 Cascade : Up to 32 PDU under single IP address via IP dongle
 SNMP : V2 / V3 via IP dongle
 Sensor Port x 2 : Temp. Sensor / Temp. + Humid. Sensor

EMC Compliance : FCC Part 15 Subpart B
 Safety Compliance : Tested to UL standard
 Environment Compliance : RoHS3 & REACH

AUSTIN HUGHES
 Design. Manufacturing. Global Services.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Copyright 2023 Austin Hughes Electronics Ltd. All rights reserved.

IP dongle (option)
 - Dual LAN Network Failover
 - 10/100 Ethernet & Gigabit Ethernet standard
 - Enterprise IP Authentication, LDAPv3 / LDAPS, Active Directory®, RADIUS protocol

Product Dimension : 2.1 (W) x 2.6 (D) x 14.6 (H) in.
 Packing dimension : -
 Material : Steel
 Color : Black
 Weight : -