


1-Phase basic PDU specification drawing

230V 10A / 13A / 16A / 20A / 32A PDU : UK x 8

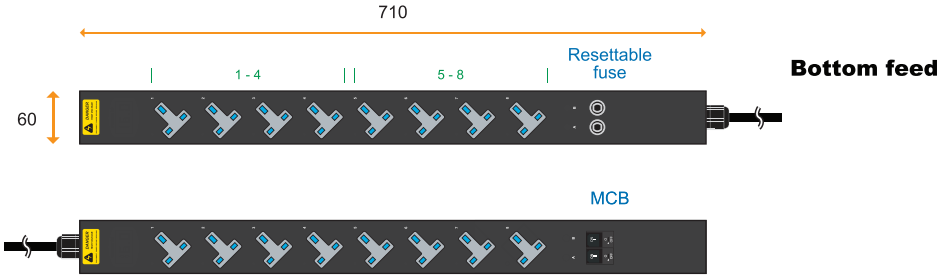


Circuit Protection	Code
Fuse	F
MCB	CR

PDU Feed	Code
Bottom	B
Top	T

Chassis Color	Code
Black	1
White	2
Red	3
Blue	4
Green	5
Orange	6
Yellow	7
Purple	8

Standard color : Black



32A model :	Circuit Protection
V8UK135-32A- F _EN/3 B - 1	Resettable Fuse x 2
V8UK135-32A- CR _EN/3 T - 1	1-pole MCB x 2
20A model :	Circuit Protection
V8UK135-20A- F _OE/3 B - 1	Resettable Fuse x 1
V8UK135-20A- CR _OE/3 T - 1	1-pole MCB x 1
16A model :	Circuit Protection
V8UK135-16A- F _EN/3 B - 1	Resettable Fuse x 1
V8UK135-16A- CR _EN/3 T - 1	1-pole MCB x 1
16A model :	Circuit Protection
V8UK135-16A- F _C20/3 B - 1	Resettable Fuse x 1
V8UK135-16A- CR _C20/3 T - 1	1-pole MCB x 1
13A model :	Circuit Protection
V8UK135-13A- F _BS/3 B - 1	Resettable Fuse x 0
V8UK135-13A- CR _BS/3 T - 1	1-pole MCB x 1
10A model :	Circuit Protection
V8UK135-10A- F _C14/3 B - 1	Resettable Fuse x 1
V8UK135-10A- CR _C14/3 T - 1	1-pole MCB x 1

Input Rating : 32Amp, 230V
Cordset : 3 meter 4.0mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 2
Circuit A : Output 16A max., UK #1-4
Circuit B : Output 16A max., UK #5-8
Weight : Net 2.9 Kg / Gross 3.3 Kg

Input Rating : 20Amp, 230V
Cordset : 3 meter 2.5mm sq. H05V V-F cordset
Protection : 20A resettable fuse or 20A hydraulic MCB x 1
Circuit : Output 20A max., UK #1-8
Weight : Net 2.9 Kg / Gross 3.3 Kg

Input Rating : 16Amp, 230V
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 1
Circuit : Output 16A max., UK #1-8
Weight : Net 2.4 Kg / Gross 2.8 Kg

Input Rating : 16Amp, 230V
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 1
Circuit : Output 16A max., UK #1-8
Weight : Net 2.5 Kg / Gross 2.9 Kg




Input Rating : 13Amp, 230V
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 13A glass fuse in BS1363 plug or 13A hydraulic MCB x 1
Circuit : Output 13A max., UK #1-8
Weight : Net 2.2 Kg / Gross 2.6 Kg

Input Rating : 10Amp, 230V
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 10A resettable fuse or 10A hydraulic MCB x 1
Circuit : Output 10A max., UK #1-8
Weight : Net 2.2 Kg / Gross 2.6 Kg

Operating Temperature : -5 to 60 °C
Storage Temperature : -25 to 65 °C
Operating Altitude : 0 to 2,000 m
Storage Altitude : 0 to 15,000 m
Humidity : 8 to 95% RH, non-condensing

EMC Compliance : CE / EMC
Safety Compliance : CE / LVD & UKCA
Tested to EN 62368-1:2014 / A11:2017 standard
Tested to EN 60730-1:2016 / A1:2019 standard
Environment Compliance : RoHS3 & REACH

VMS Mounting Button

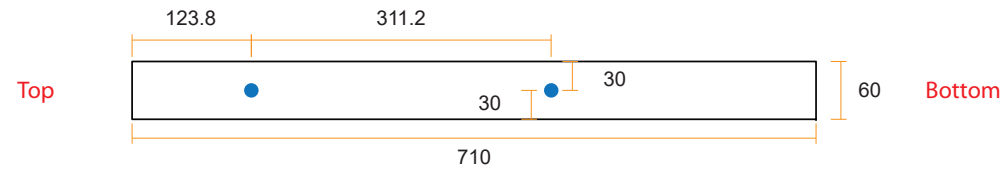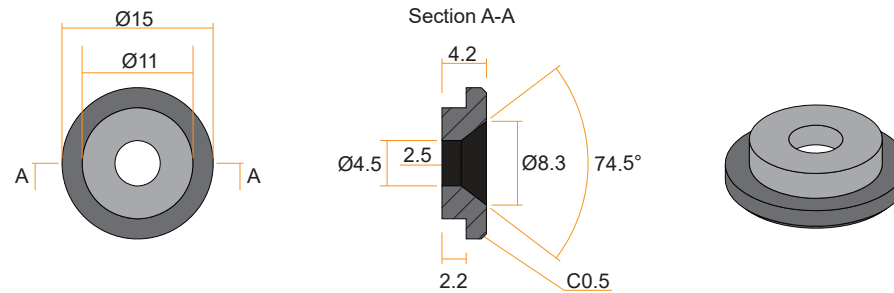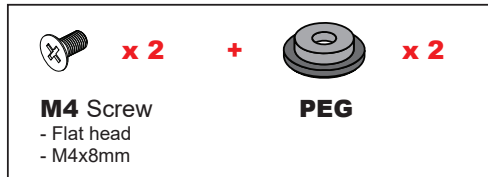

VMB Mounting Bracket

