

**Benefits**

- ▶ 1U 17" LED-backlit LCD console drawer
- ▶ Dual slide - LCD and keyboard slide independently
- ▶ Ultra short depth 480mm / 18.9"
- ▶ 1920 x 1080 native resolution / 16.7M colors ( 8-bit )
- ▶ HDMI 1.4 + DP 1.2 + VGA video input / USB KB / MS
- ▶ Dual stereo speakers for HDMI 1.4 & DP 1.2
- ▶ Ideal for open rack / short depth rack
- ▶ 104-key keyboard with touchpad
- ▶ One Man installation design
- ▶ Enhanced aesthetics with new molded front panel and 2-point lock
- ▶ 2-year standard warranty ( upgradable up to 5 years )
- ▶ TAA Compliant

**Options**

- 3G / HD / SD-SDI Broadcast-grade input ( **SDI** )
- DC power : 12V / 24V / 48V / 125V / 250V
- SUN Micro keyboard available
- KVM integration : Refer to dual slide DF117 series  
[www.austin-hughes.com/PS-CV-DF117.pdf](http://www.austin-hughes.com/PS-CV-DF117.pdf)

**Product Specifications****Console Port**

Video input	HDMI 1.4 + DP 1.2 + VGA
KB / MS	USB interface
Console cable bundled	HDMI 1.4 cable x 1 + USB type A cable x 2

**LED-backlit LCD Panel**

Panel size ( diagonal )	17.3"
Native resolution	1920 x 1080
Brightness ( cd/m <sup>2</sup> )	300
Contrast ratio ( typ. )	1000 : 1
Colors	16.7 M, 8-bit
Viewing angle ( L/R/U/D )	85/85/85/85
Response time ( ms )	25
Dot pitch ( mm )	0.1989
Display area ( mm )	381.888H x 214.812V
Surface treatment	Anti-glare, Hard-coating
Surface hardness	3H
Backlight type	LED
MTBF (hrs)	15,000

**Physical**

Product ( W x D x H )	442 x 480 x 44 mm / 17.4 x 18.9 x 1.73 inch
Packing ( W x D x H )	590 x 622 x 140 mm / 23.2 x 24.5 x 5.5 inch
Net weight	10.6 kg / 23.4 lb
Gross weight	15.6 kg / 34.4 lb

\* All dimensions stated are subject to change if options are selected / integrated to base model part codes

**Mounting Distance**

Single console drawer	490 ~ 720 mm / 19.3 ~ 28.3 inch
-----------------------	---------------------------------

**Power**

Input	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption (console / KVM)	Screen on	Max. 14W / Max. 45W
	Power saving mode	Max. 2W / Max. 34W
	Power button off	Max. 1W / Nil

**Environment**

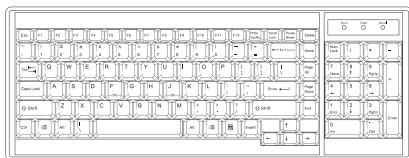
Operating temp.	0 to 55°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	10~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration ( 11ms duration )
Vibration	10~300Hz 0.5G RMS random vibration

**Compliance**

EMC	FCC & CE
Safety	CE / LVD & UKCA
Environment	REACH & RoHS3 / WEEE

**Standard Keyboard**

**Ge** G keyboard with touchpad

**Keyboard Options**

\* US layout only

**Se** S keyboard with touchpad

**Supporting layouts**

America   
U.S.

EMEA  U.K.  Germany  France  Russia  Spain  Italy

Asia  Japan  Korea