




Benefits

- Decodes RTSP, RTMP, UDP, HTTP, HLS protocols
- Up to 1080p / 60Hz video resolution support
- Unicast and multicast support
- Operates on standard 1000Mb Ethernet networks
- Built-in Web UI for configuration and control
- Excellent image quality with very low delay
- Embedded to UltraView professional LCD
- Standalone version available on request

UltraView LCD w/ decoder (UV-DE100F)

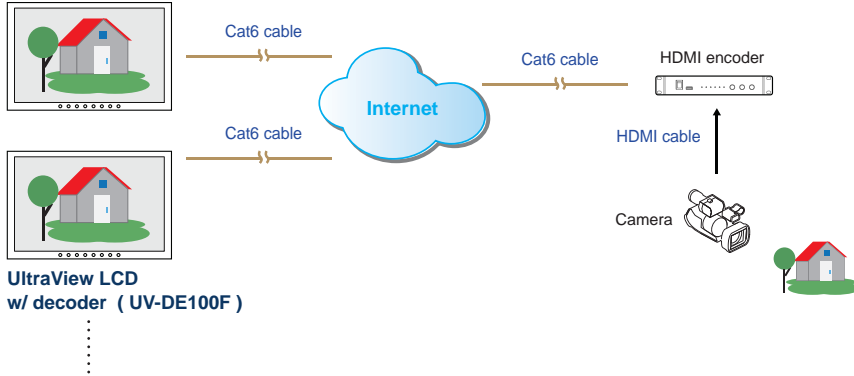

Applications

- Network television IPTV
- Digital signage
- Campus broadcasting system
- Subway PIS
- Airport PIS
- Video remote transmission

Product Specifications

Video	
Resolution	1920 x 1080 (60p / 50p), 1920 x 1080 (60i / 50i), 1280 x 720 (60p / 50p), 720 x 576i / 720 x 480i
Decoding	H.265 / H.264 / AVC Baseline / Main / High Profile Level 5.0
Decoding resolution	3840 x 2160 (30p), 1920 x 1080 (60p / 50p), 1920 x 1080 (60i / 50i), 1280 x 720 (60p / 50p), 720 x 576i / 720 x 480i
Media Format	RMVB, MOV, AVI, WMV, MTK, MKV, TS, mpg

System	
Ethernet	1000M
Protocol	HTTP, RTSP, RTMP, HLS, FLV, UDP, Multicast Unicast
Management	Built-in Web GUI

Power	
Consumption	< 5W

UltraView LCD Series Support

- | | | | |
|--|---|--|--|
| <p>16 : 9
(4K / 1080p)</p> <ul style="list-style-type: none"> ● K65" ● K55" ● K43" ● K32" ● K28" ● K23" ● K17" ● K15" | <p>16 : 9
(1080p)</p> <ul style="list-style-type: none"> ● F21" ● F17" ● F15" | <p>16 : 10</p> <ul style="list-style-type: none"> ● W19" | <p>4 : 3</p> <ul style="list-style-type: none"> ● 20" ● 19" ● 17" ● 15" ● 12" ● 10" ● 8" ● 6" |
|--|---|--|--|

Standalone HDMI Decoder (UV-SDE100F)



- Dimensions : 137 x 20 x 92 mm (W x D x H)
- Net weight : 0.2 g
- Available on request