


1-Phase metered PDU specification drawing

208V 20A / 30A PDU : Combo C13/C19 x 30

unit : inch

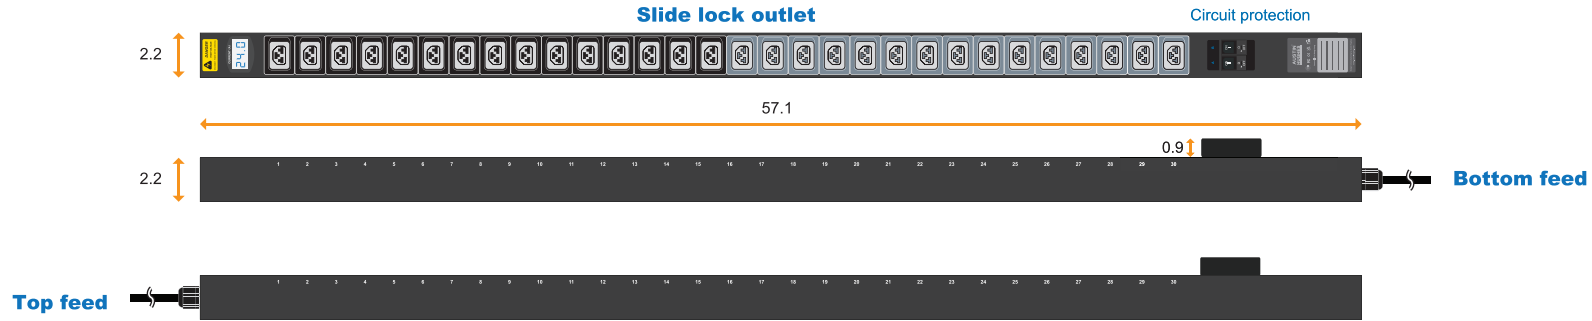

Circuit Protection	Code
Fuse	F
MCB	CR

PDU Feed	Code
Bottom	B
Top	T



30A model :	Circuit Protection
V30X19-30A-MD/ F _L630/3 B-1	Resettable Fuse x 2
V30X19-30A-MD/ CR _L630/3 T-1	1-pole MCB x 2

Input Rating : 30Amp, 208V
Cordset : 10 feet UL SJT 10 AWG cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 2
Circuit A : Output 12A max., Combo C13/C19 #1-15
Circuit B : Output 12A max., Combo C13/C19 #16-30
Weight : Net - lb / Gross - lb

Slide Lock Outlet Color	Color
	Black
	Grey
	White
	Red
	Blue
	Green

Chassis Color	Code
	Black 1
	White 2
	Red 3
	Blue 4
	Green 5
	Orange 6
	Yellow 7
	Purple 8



20A model :	Circuit Protection
V30X19-20A-MD/ F _L620/3 B-1	Resettable Fuse x 1
V30X19-20A-MD/ CR _L620/3 T-1	1-pole MCB x 1

Input Rating : 20Amp, 208V
Cordset : 10 feet UL SJT 12 AWG cordset
Protection : 20A resettable fuse or 20A hydraulic MCB x 1
Circuit : Output 16A max., Combo C13/C19 #1-30
Weight : Net - lb / Gross - lb

Standard color
Single circuit : Black
Dual circuit : Black / Grey

Standard color: Black

Operating Temperature : -5 to 60 °C
Storage Temperature : -25 to 65 °C
Operating Altitude : 0 to 2,000 m
Storage Altitude : 0 to 15,000 m
Humidity : 8 to 95% RH, non-condensing

Meter Features (MD metered PDU)
Local Display : 3-digit LED ammeter measuring input load current
Measurement : Current (A)
Accuracy : ± (3% of the reading + 5 digits) RMS

EMC Compliance : FCC Part 15 Subpart B (Class A)
Safety Compliance : Tested to UL 60730-1:2016 and CAN / CSA-E60730-1:2015
Tested to UL 62368-1:2014 and CAN / CSA-C22.2 No. 62368-1:2014
Environment Compliance : RoHS3 & REACH

AUSTIN HUGHES Design. Manufacturing. Global Services.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Copyright 2024 Austin Hughes Electronics Ltd. All rights reserved.

Product Dimension : 2.2 (W) x 2.2 (D) x 57.1 (H) inch
Packing Dimension (for 2 PDUs) : 4.3 (W) x 10.6 (D) x 70.1 (H) inch