

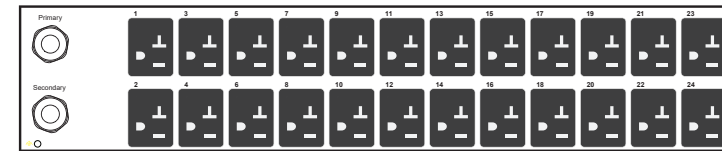


Unit : inch


Front view

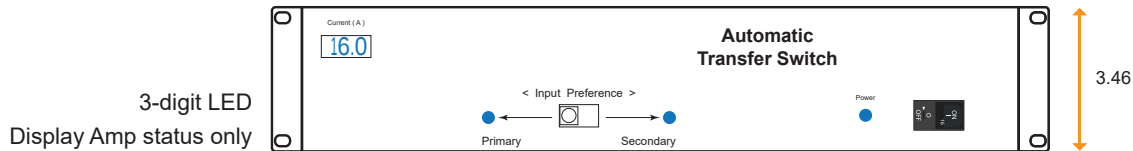

US outlet x 24

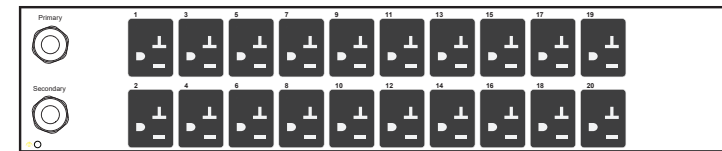

US outlet x 20

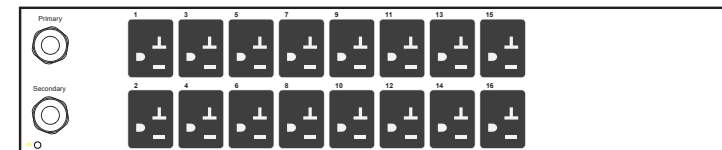

US outlet x 16

110V model	US outlet #	Inlet x 2	Cordset x 2	20A MCB
ATS-H24US-20A_L520	24	 20 Amp NEMA L5-20P	9.8ft 12AWG UL	1
ATS-H20US-20A_L520	20			
ATS-H16US-20A_L520	16			

110V model	US outlet #	Inlet x 2	Cordset x 2	20A MCB
ATS-H24US-20A_520	24	 20 Amp NEMA 5-20P	9.8ft 12AWG UL	1
ATS-H20US-20A_520	20			
ATS-H16US-20A_520	16			



Specification		Meter Features		EMC Certificates	
Operating Temperature	: -5 to 60 °C	Nominal input volt.	: 110V	FCC	: FCC 47 CFR Part 15 Subpart B, ICES-003 Issue 7
Storage Temperature	: -25 to 65 °C	Acceptable input volt.	: ±10% nominal	Safety Certificates CB : IEC 62368-1:2014 UL-US : UL 62368-1, 2nd Ed., Issue Date: 2014-12-01 UL-CA : CSA C22.2 No. 62368-1-14, 2nd Ed., Issue Date: 2014-12-01 Environment : RoHS, Reach & WEEE	
Operating Altitude	: 0 to 2,000 m	Input frequency	: 50 / 60Hz		
Storage Altitude	: 0 to 15,000 m	Transfer time	: 10-16ms typical		
Humidity (non-condensing)	: 8 to 95% RH	Electrical endurance	: 1 x 10 ⁵ operations		
		Power consumption	: Approx. 20W		
Chassis Material / Color					
: Steel / Black					
Product Dimension					
: 17.4W x 11.8D x 3.46H (inch)					
Packing Dimension					
: 21.7W x 21.7D x 5.9H (inch)					
Net / Gross Weight					
: 20.9 lbs / 22.0 lbs					