


Unit : inch

WS ATS

2.0" color touch LCD
Display Volt, Amp & kWh status


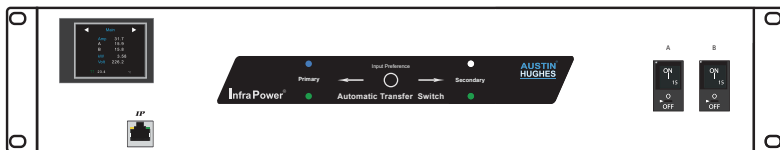


Front view


3.46

BS ATS


3-digit LED
Display Amp status only

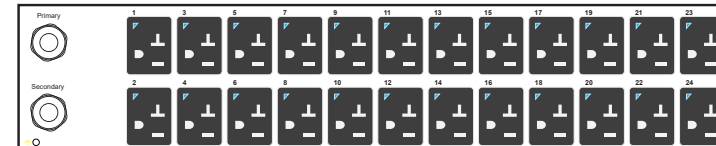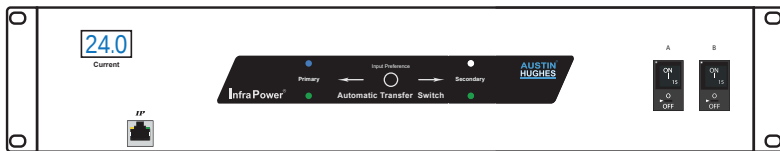

US outlet x 24

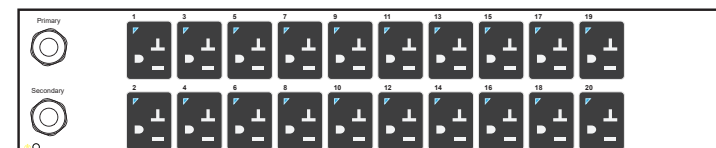

US outlet x 20

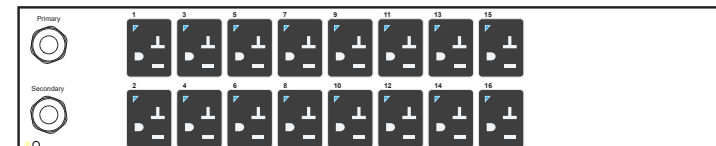

US outlet x 16

110V model	US outlet #	Inlet x 2	Cordset x 2	16A MCB
ATS-H24US-30A-WS_L530 ATS-H24US-30A-BS_L530	24	 30 Amp NEMA L5-30P	9.8ft 10AWG UL	2
ATS-H20US-30A-WS_L530 ATS-H20US-30A-BS_L530	20			
ATS-H16US-30A-WS_L530 ATS-H16US-30A-BS_L530	16			

110V model	US outlet #	Inlet x 2	Cordset x 2	16A MCB
ATS-H24US-30A-WS_530 ATS-H24US-30A-BS_530	24	 30 Amp NEMA 5-30P	9.8ft 10AWG UL	2
ATS-H20US-30A-WS_530 ATS-H20US-30A-BS_530	20			
ATS-H16US-30A-WS_530 ATS-H16US-30A-BS_530	16			

**Specification**

Operating Temperature	: -5 to 60 °C	Nominal input volt.	: 110V
Storage Temperature	: -25 to 65 °C	Acceptable input volt.	: ±10% nominal
Operating Altitude	: 0 to 2,000 m	Input frequency	: 50 / 60Hz
Storage Altitude	: 0 to 15,000 m	Transfer time	: 10 ms typical
Humidity (non-condensing)	: 8 to 95% RH	Electrical endurance	: 1 x 10 ⁵ operations
		Power consumption	: Approx. 20W

Chassis Material / Color	: Steel / Black
Product Dimension	: 17.4W x 11.8D x 3.46H (inch)
Packing Dimension	: 21.7W x 21.7D x 5.9H (inch)
Net / Gross Weight	: 20.9 lbs / 22.0 lbs

Meter Features**WS ATS**

Local Display	: 2.0" color touch LCD
Bank Measurement	: Volt, Amp, kWh & Power Factor
Outlet Control	: Outlet Switch ON / OFF
Accuracy	: ±1% Billing-grade
IP Access	: Embedded IP with Gigabit Ethernet port Enterprise IP Authentication, LDAPv3 / LDAPS, Active Directory®, RADIUS protocol
SNMP	: V2 / V3 & GUI

BS ATS

3-digit LED
Same as WS
Same as WS
Same as WS
Same as WS
Same as WS

EMC Certificates

FCC : FCC 47 CFR Part 15 Subpart B, ICES-003 Issue 7

Safety Certificates

CB : IEC 62368-1:2014
UL-US : UL 62368-1, 2nd Ed., Issue Date: 2014-12-01
UL-CA : CSA C22.2 No. 62368-1-14, 2nd Ed., Issue Date: 2014-12-01

Environment : RoHS, Reach & WEEE