


**WSi ATS**

2.0" color touch LCD  
Display Volt, Amp & kWh status


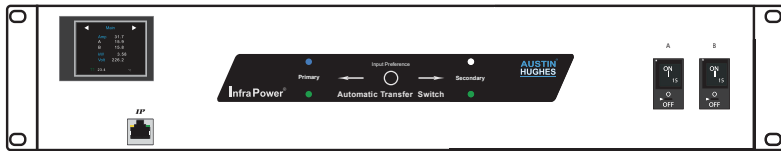


Front view


88mm

**BSi ATS**

3-digit LED  
Display Amp status only

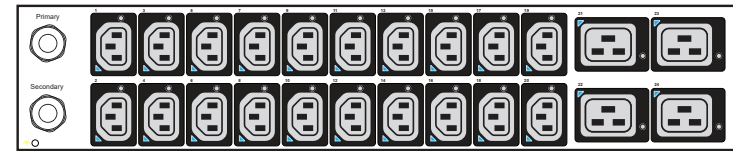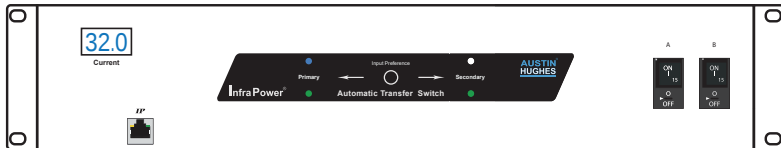

C13 outlet x 20 +  
C19 outlet x 4

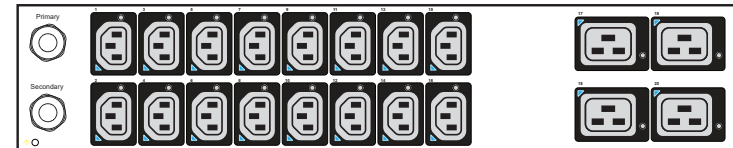

C13 outlet x 16 +  
C19 outlet x 4

| 208V model                                                   | C13 + C19 # | Inlet x 2                 | Cordset x 2          | 16A MCB |
|--------------------------------------------------------------|-------------|---------------------------|----------------------|---------|
| ATS-H20C13/4C19-30A-WSi_L630<br>ATS-H20C13/4C19-30A-BSi_L630 | 20 + 4      | <br>30 Amp<br>NEMA L6-30P | 9.8ft<br>10AWG<br>UL | 2       |
| ATS-H16C13/4C19-30A-WSi_L630<br>ATS-H16C13/4C19-30A-BSi_L630 | 16 + 4      |                           |                      |         |

| 230V model                                               | C13 + C19 # | Inlet x 2                    | Cordset x 2                 | 16A MCB |
|----------------------------------------------------------|-------------|------------------------------|-----------------------------|---------|
| ATS-H20C13/4C19-32A-WSi_EN<br>ATS-H20C13/4C19-32A-BSi_EN | 20 + 4      | <br>32 Amp<br>IEC 60309 2P+E | 3M<br>4.0mm sq.<br>H05V V-F | 2       |
| ATS-H16C13/4C19-32A-WSi_EN<br>ATS-H16C13/4C19-32A-BSi_EN | 16 + 4      |                              |                             |         |



| Specification             |   |                         |                        | Meter Features |                                | WSi ATS            |   | BSi ATS                                                                          |             | EMC Certificates    |   |                                                           |
|---------------------------|---|-------------------------|------------------------|----------------|--------------------------------|--------------------|---|----------------------------------------------------------------------------------|-------------|---------------------|---|-----------------------------------------------------------|
| Operating Temperature     | : | -5 to 60 °C             | Nominal input volt.    | :              | 208V / 230V                    | Local Display      | : | 2.0" color touch LCD                                                             | 3-digit LED | FCC                 | : | FCC 47 CFR Part 15 Subpart B, ICES-003 Issue 7            |
| Storage Temperature       | : | -25 to 65 °C            | Acceptable input volt. | :              | ±10% nominal                   | Bank Measurement   | : | Volt, Amp, kWh & Power Factor                                                    | Same as WSi | CE / EMC            | : | EN55032:2015/A11:2020                                     |
| Operating Altitude        | : | 0 to 2,000 m            | Input frequency        | :              | 50 / 60Hz                      | Outlet Measurement | : | Amp & kWh                                                                        | Same as WSi |                     | : | EN IEC 61000-3-2:2019/A1:2021                             |
| Storage Altitude          | : | 0 to 15,000 m           | Transfer time          | :              | 10 ms typical                  | Outlet Control     | : | Outlet Switch ON / OFF                                                           | Same as WSi |                     | : | EN61000-3-3:2013/A2:2021                                  |
| Humidity (non-condensing) | : | 8 to 95% RH             | Electrical endurance   | :              | 1 x 10 <sup>5</sup> operations | Accuracy           | : | ±1% Billing-grade                                                                | Same as WSi |                     | : | EN55035:2017/A11:2020                                     |
|                           |   |                         | Power consumption      | :              | Approx. 20W                    | IP Access          | : | Embedded IP with Gigabit Ethernet port                                           | Same as WSi | Safety Certificates |   |                                                           |
|                           |   |                         |                        |                |                                |                    |   | Enterprise IP Authentication, LDAPv3 / LDAPS, Active Directory®, RADIUS protocol | Same as WSi |                     |   |                                                           |
|                           |   |                         |                        |                |                                | SNMP               | : | V2 / V3 & GUI                                                                    | Same as WSi |                     |   |                                                           |
| Chassis Material / Color  | : | Steel / Black           |                        |                |                                |                    |   |                                                                                  |             | CE/ LVD             | : | EN 62368-1:2014, EN 62368-1:2014/A11:2017                 |
| Product Dimension         | : | 442W x 300D x 88H (mm)  | /                      |                | 17.4W x 11.8D x 3.46H (inch)   |                    |   |                                                                                  |             | CB                  | : | IEC 62368-1:2014                                          |
| Packing Dimension         | : | 540W x 540D x 150H (mm) | /                      |                | 21.7W x 21.7D x 5.9H (inch)    |                    |   |                                                                                  |             | UKCA                | : | BS EN 62368-1:2014+A11: 2017                              |
| Net / Gross Weight        | : | 9.5 kg / 10.0 kg        | /                      |                | 20.9 lbs / 22.0 lbs            |                    |   |                                                                                  |             | UL-US               | : | UL 62368-1, 2nd Ed., Issue Date: 2014-12-01               |
|                           |   |                         |                        |                |                                |                    |   |                                                                                  |             | UL-CA               | : | CSA C22.2 No. 62368-1-14, 2nd Ed., Issue Date: 2014-12-01 |
|                           |   |                         |                        |                |                                |                    |   |                                                                                  |             | Environment         | : | RoHS, Reach & WEEE                                        |