



Unit : mm

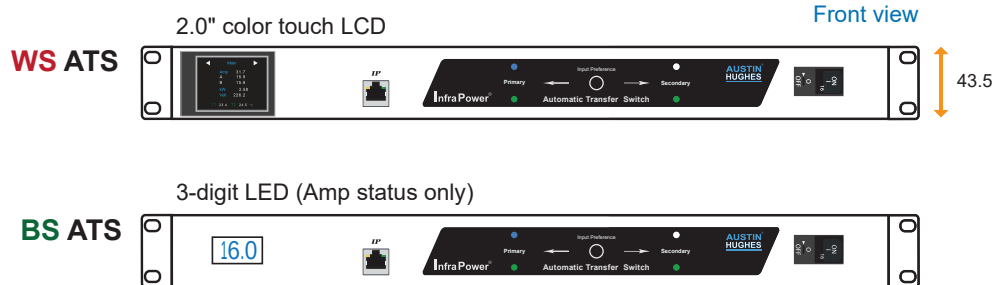

230V model	Inlet x 2	Cordset x 2	16A MCB
ATS-H1EN16A-16A-WS_EN ATS-H1EN16A-16A-BS_EN	16 Amp IEC 60309 2P+E	3M 1.5mm sq. H05V V-F	1

Circuit Details :
output 16A max., 16A IEC60309 2P+E connector

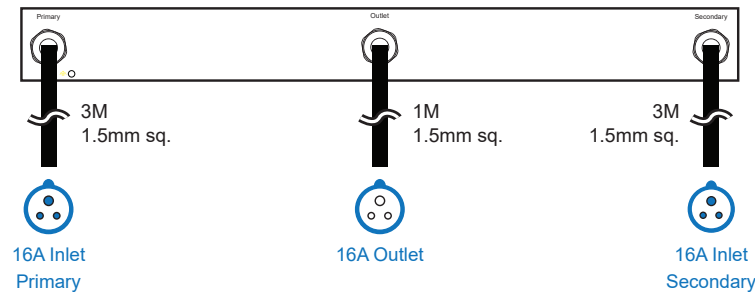

Specification				Meter Features		WS ATS	BS ATS	EMC Certificates	
Operating Temperature	: -5 to 60 °C	Nominal input volt.	: 230V	Local Display	: 2.0" color touch LCD		3-digit LED	CE / EMC	: EN55032:2015/A11:2020
Storage Temperature	: -25 to 65 °C	Acceptable input volt.	: ±10% nominal	Bank Measurement	: Volt, Amp, kWh & Power Factor		Same as WS		EN IEC 61000-3-2:2019/A1:2021
Operating Altitude	: 0 to 2,000 m	Input frequency	: 50 / 60Hz	Outlet Control	: Outlet Switch ON / OFF		Same as WS		EN61000-3-3:2013/A2:2021
Storage Altitude	: 0 to 15,000 m	Transfer time	: 10 ms typical	Accuracy	: ±1% Billing-grade		Same as WS		EN55035:2017/A11:2020
Humidity (non-condensing)	: 8 to 95% RH	Electrical endurance	: 1 x 10 ⁵ operations	IP Access	: Embedded IP with Gigabit Ethernet port Enterprise IP Authentication, LDAPv3 / LDAPS, Active Directory®, RADIUS protocol		Same as WS	Safety Certificates	
		Power consumption	: Approx. 20W	SNMP	: V2 / V3 & GUI		Same as WS	CE/ LVD	: EN 62368-1:2014, EN 62368-1:2014/A11:2017
Chassis Material / Color	: Steel / Black							CB	: IEC 62368-1:2014
Product Dimension	: 442W x 300D x 43.5H (mm)							UKCA	: BS EN 62368-1:2014+A11: 2017
Packing Dimension	: 500W x 540D x 150H (mm)							UL-US	: UL 62368-1, 2nd Ed., Issue Date: 2014-12-01
Net / Gross Weight	: 5.7 kg / 6.2 kg							UL-CA	: CSA C22.2 No. 62368-1-14, 2nd Ed., Issue Date: 2014-12-01
								Environment : RoHS, Reach & WEEE	