

Unit : inch

3-digit LED (Amp status only)


Front view



208V model	Inlet x 2	Cordset x 2	20A MCB
ATS-H1L620R-20A_L620	20 Amp NEMA L6-20P	9.8ft 12AWG H05V V-F	1

Circuit Details :

20A NEMA L6-20R connector

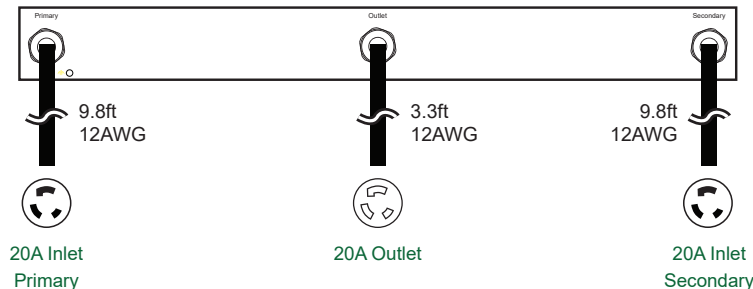

Specification

Operating Temperature	: -5 to 60 °C	Nominal input volt.	: 110V
Storage Temperature	: -25 to 65 °C	Acceptable input volt.	: ±10% nominal
Operating Altitude	: 0 to 2,000 m	Input frequency	: 50 / 60Hz
Storage Altitude	: 0 to 15,000 m	Transfer time	: 10-16ms typical
Humidity (non-condensing)	: 8 to 95% RH	Electrical endurance	: 1 x 10 ⁵ operations
		Power consumption	: Approx. 20W

Chassis Material / Color	: Steel / Black
Product Dimension	: 17.4W x 11.8D x 1.7H (inch)
Packing Dimension	: 19.7W x 21.7D x 5.9H (inch)
Net / Gross Weight	: 12.5 lbs / 13.6 lbs

Meter Features

Local Display	: 3-digit LED ammeter measuring input load current
Measurement	: Current (A)
Accuracy	: ± (3% of the reading + 5 digits) RMS

EMC Certificates

FCC	: FCC 47 CFR Part 15 Subpart B, ICES-003 Issue 7
-----	--

Safety Certificates

CB	: IEC 62368-1:2014
UL-US	: UL 62368-1, 2nd Ed., Issue Date: 2014-12-01
UL-CA	: CSA C22.2 No. 62368-1-14, 2nd Ed., Issue Date: 2014-12-01

Environment : RoHS, Reach & WEEE