



Unit : inch

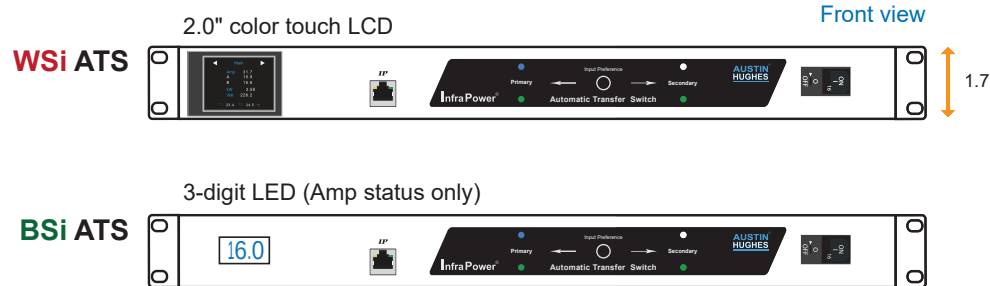

208V model	Inlet x 2	Cordset x 2	20A MCB
ATS-H1L620R-20A-WSi_L620	20 Amp NEMA L6-20P	9.8ft 12AWG H05V V-F	1
ATS-H1L620R-20A-BSi_L620			

Circuit Details :
20A NEMA L6-20R connector

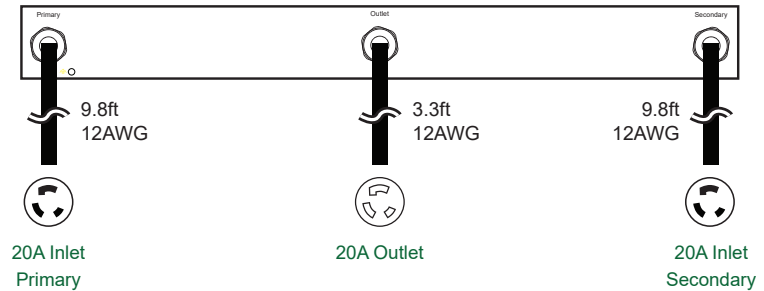

Specification				Meter Features	WSi ATS	BSi ATS	EMC Certificates		
Operating Temperature	:	-5 to 60 °C	Nominal input volt.	:	110V	3-digit LED	FCC	:	FCC 47 CFR Part 15 Subpart B, ICES-003 Issue 7
Storage Temperature	:	-25 to 65 °C	Acceptable input volt.	:	±10% nominal	Same as WSi	Safety Certificates		
Operating Altitude	:	0 to 2,000 m	Input frequency	:	50 / 60Hz	Same as WSi	CB	:	IEC 62368-1:2014
Storage Altitude	:	0 to 15,000 m	Transfer time	:	10 ms typical	Same as WSi	UL-US	:	UL 62368-1, 2nd Ed., Issue Date: 2014-12-01
Humidity (non-condensing)	:	8 to 95% RH	Electrical endurance	:	1 x 10 ⁵ operations	Same as WSi	UL-CA	:	CSA C22.2 No. 62368-1-14, 2nd Ed., Issue Date: 2014-12-01
			Power consumption	:	Approx. 20W	Same as WSi	Environment	:	RoHS, Reach & WEEE
Chassis Material / Color	:	Steel / Black							
Product Dimension	:	17.4W x 11.8D x 1.7H (inch)							
Packing Dimension	:	19.7W x 21.7D x 5.9H (inch)							
Net / Gross Weight	:	12.5 lbs / 13.6 lbs							