


Unit : inch


W ATS
2.0" color touch LCD
Display Volt, Amp & kWh status

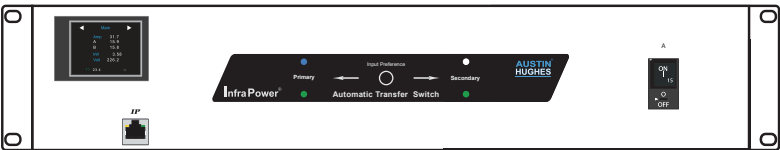

Front view


3.46

B ATS
3-digit LED
Display Amp status only

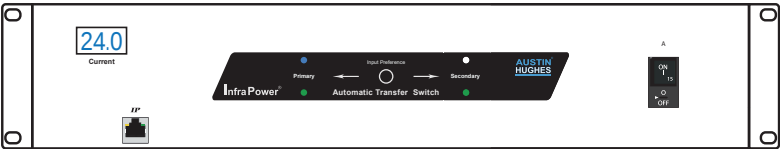

208V model	Inlet x 2	Cordset x 2	30A MCB
ATS-H1L630R-30A-W_L630	30 Amp	9.8ft 10AWG	1
ATS-H1L630R-30A-B_L630	NEMA L6-30P	H05V V-F	

Circuit Details :
30A NEMA L6-30R connector

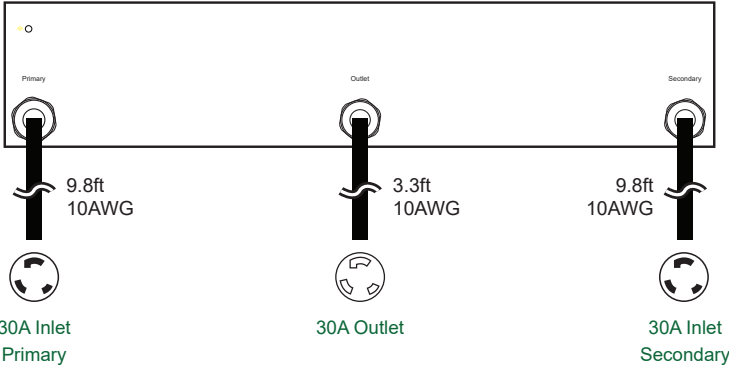

Specification				Meter Features		W ATS	B ATS	EMC Certificates	
Operating Temperature	: -5 to 60 °C	Nominal input volt.	: 208V	Local Display	:	2.0" color touch LCD	3-digit LED	CE / EMC	: EN55032:2015/A11:2020
Storage Temperature	: -25 to 65 °C	Acceptable input volt.	: ±10% nominal	Bank Measurement	:	Volt, Amp, kWh & Power Factor	Same as W		: EN IEC 61000-3-2:2019/A1:2021
Operating Altitude	: 0 to 2,000 m	Input frequency	: 50 / 60Hz	Accuracy	:	±1% Billing-grade	Same as W		: EN61000-3-3:2013/A2:2021
Storage Altitude	: 0 to 15,000 m	Transfer time	: 10 ms typical	IP Access	:	Embedded IP with Gigabit Ethernet port	Same as W		: EN55035:2017/A11:2020
Humidity (non-condensing)	: 8 to 95% RH	Electrical endurance	: 1 x 10 ⁵ operations			Enterprise IP Authentication, LDAPv3 / LDAPS, Active Directory®, RADIUS protocol	Same as W	Safety Certificates	
		Power consumption	: Approx. 20W	SNMP	:	V2 / V3 & GUI	Same as W	CE/ LVD	: EN 62368-1:2014, EN 62368-1:2014/A11:2017
Chassis Material / Color	: Steel / Black							CB	: IEC 62368-1:2014
Product Dimension	: 17.4W x 11.8D x 3.46H (inch)							UKCA	: BS EN 62368-1:2014+A11: 2017
Packing Dimension	: 21.7W x 21.7D x 5.9H (inch)							UL-US	: UL 62368-1, 2nd Ed., Issue Date: 2014-12-01
Net / Gross Weight	: 20.9 lbs / 22.0 lbs							UL-CA	: CSA C22.2 No. 62368-1-14, 2nd Ed., Issue Date: 2014-12-01
								Environment	: RoHS, Reach & WEEE