

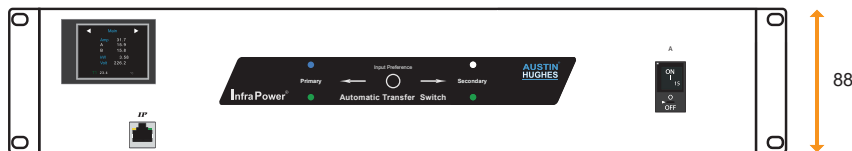


WSi ATS
2.0" color touch LCD
Display Volt, Amp & kWh status

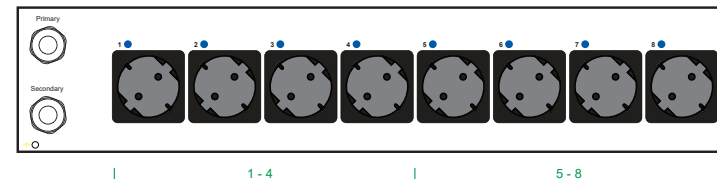

BSi ATS
3-digit LED
Display Amp status only

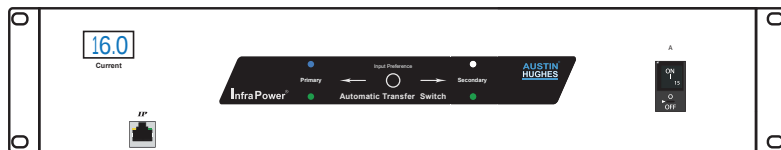

Circuit Details : S C H # 1 - 8

230V model	Inlet x 2	Cordset x 2	16A MCB
ATS-H8SCH-16A-WSi_CEE7 ATS-H8SCH-16A-BSi_CEE7	16 Amp Schuko	3M 1.5mm sq. H05V V-F	1

230V model	Inlet x 2	Cordset x 2	16A MCB
ATS-H8SCH-16A-WSi_C20 ATS-H8SCH-16A-BSi_C20	16 Amp IEC320 C20	3M 1.5mm sq. H05V V-F	1

230V model	Inlet x 2	Cordset x 2	16A MCB
ATS-H8SCH-16A-WSi_EN ATS-H8SCH-16A-BSi_EN	16 Amp IEC 60309 2P+E	3M 1.5mm sq. H05V V-F	1

230V model	Inlet x 2	Cordset x 2	10A MCB
ATS-H8SCH-10A-WSi_C14 ATS-H8SCH-10A-BSi_C14	10 Amp IEC320 C14	3M 1.5mm sq. H05V V-F	1



Specification			Meter Features		WSi ATS	BSi ATS	EMC Certificates
Operating Temperature	: -5 to 60 °C	Nominal input volt.	: 230V	Local Display	: 2.0" color touch LCD	3-digit LED	CE / EMC : EN55032:2015/A11:2020
Storage Temperature	: -25 to 65 °C	Acceptable input volt.	: ±10% nominal	Bank Measurement	: Volt, Amp, kWh & Power Factor	Same as WSi	EN IEC 61000-3-2:2019/A1:2021
Operating Altitude	: 0 to 2,000 m	Input frequency	: 50 / 60Hz	Outlet Measurement	: Amp & kWh	Same as WSi	EN61000-3-3:2013/A2:2021
Storage Altitude	: 0 to 15,000 m	Transfer time	: 10 ms typical	Outlet Control	: Outlet Switch ON / OFF	Same as WSi	EN55035:2017/A11:2020
Humidity (non-condensing)	: 8 to 95% RH	Electrical endurance	: 1 x 10 ⁵ operations	Accuracy	: ±1% Billing-grade	Same as WSi	Safety Certificates
		Power consumption	: Approx. 20W	IP Access	: Embedded IP with Gigabit Ethernet port Enterprise IP Authentication, LDAPv3 / LDAPS, Active Directory®, RADIUS protocol	Same as WSi	CE/ LVD : EN 62368-1:2014, EN 62368-1:2014/A11:2017
Chassis Material / Color	: Steel / Black			SNMP	: V2 / V3 & GUI	Same as WSi	CB : IEC 62368-1:2014
Product Dimension	: 442W x 300D x 88H (mm)						UKCA : BS EN 62368-1:2014+A11: 2017
Packing Dimension	: 540W x 540D x 150H (mm)						UL-US : UL 62368-1, 2nd Ed., Issue Date: 2014-12-01
Net / Gross Weight	: 9.5 kg / 10.0 kg						UL-CA : CSA C22.2 No. 62368-1-14, 2nd Ed., Issue Date: 2014-12-01
							Environment : RoHS, Reach & WEEE