Drawing & Specification	1-Phase 208V Basic / metered MD PDU	InfraPower®
1 Apr 2026 Version : V3	Slide-lock C19 x 12	

unit : inch

(T) Top feed

PDU Feed	Code
Bottom	B
Top	T

Meter **Slide-lock outlet : C19 x 12**

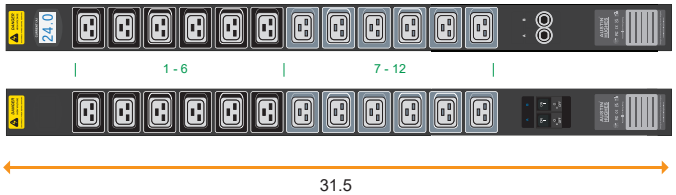

Bottom feed (B)

Circuit Protection	Code
Hydraulic MCB	CR
Resettable Fuse	F

Chassis Color	Code
Black	1
White	2
Red	3
Blue	4
Green	5
Orange	6
Yellow	7
Purple	8

Standard color : Black

30A model 5.0 kVA	V12L19-30A-MD/CR_L630/3B-1	MD PDU Local metered	30A Inlet NEMA L6-30P 10ft Cordset 3W 10AWG UL SJT	Circuit A : C19 #1-6 Circuit B : C19 #7-12 Circuit max. Amp. : 12A
	V12L19-30A- CR_L630/3B-1	Basic PDU		
20A model 3.3 kVA	V12L19-20A-MD/CR_L620/3B-1	MD PDU Local metered	20A Inlet NEMA L6-20P 10ft Cordset 3W 12AWG UL SJT	Circuit : 16A max., C19 #1-12
	V12L19-20A- CR_L620/3B-1	Basic PDU		

Remark : In accordance with the National Electrical Code (NEC), the branch-circuit amperage has been derated to 80% of its rated capacity for continuous loads.

Slide Lock Outlet
Worldwide Patented

Standard color

L19

Outlet Color	Code
Black ✓	C1
Grey ✓	C2
White	C3
Red	C4
Blue	C5
Green	C6

Dimension & Weight

Product Dimension	:	2.2W x 2.2D x 31.5H (inch)
Packing Dimension (2-in-1)	:	4.3W x 10.6D x 43.0H (inch)
Net / Gross Weight	:	9.6 lb / 11.3 lb

Specification

Operating Temperature	:	-5 to 60 °C
Storage Temperature	:	-25 to 65 °C
Operating Altitude	:	0 to 2,000 m
Storage Altitude	:	0 to 15,000 m
Humidity (non-condensing)	:	8 to 95% RH
Chassis Material / Color	:	Steel / Black

Meter Features		MD PDU	Basic PDU
Local Display	:	3-digit LED ammeter measuring input load current	✘
Measurement	:	Current (A)	✘
Accuracy	:	± (3% of the reading + 5 digits) RMS	✘

Safety Certificates

CB	:	IEC 62368-1:2018
UL-US	:	UL 62368-1, 3rd Ed, 2021-10-22
UL-CA	:	CAN/ CSA C22.2 No. 62368-1:19, 3rd Ed, 2021-10-22

EMC Certificates

FCC : FCC 47 CFR Part 15 Subpart B

Environment : RoHS, Reach & WEEE

AUSTIN HUGHES®

Design. Manufacturing. Global Services.

Copyright 2026 Austin Hughes Electronics Ltd. All rights reserved.
The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.